

**Job Management Partner 1/Automatic Job  
Management System 3  
Configuration Guide 2**

3020-3-S06-04(E)

## ■ Relevant program products

For details about the applicable OS versions, and the service packs and patches required for JPI/Automatic Job Management System 3, see the *Release Notes*.

For Windows Server 2008:

P-2A12-3K97 Job Management Partner 1/Automatic Job Management System 3 - Manager version 09-00

P-2A12-3397 Job Management Partner 1/Automatic Job Management System 3 - Agent version 09-00

P-2A2C-6L97 Job Management Partner 1/Base version 09-00

For Windows 7, Windows Server 2008 and Windows Vista:

P-2A12-3497 Job Management Partner 1/Automatic Job Management System 3 - View version 09-00

For Windows Server 2003 and Windows Server 2003(x64):

P-2412-3K97 Job Management Partner 1/Automatic Job Management System 3 - Manager version 09-00

P-2412-3397 Job Management Partner 1/Automatic Job Management System 3 - Agent version 09-00

P-242C-6L97 Job Management Partner 1/Base version 09-00

For Windows Server 2003, Windows Server 2003(x64), and Windows XP Professional:

P-2412-3497 Job Management Partner 1/Automatic Job Management System 3 - View version 09-00

For HP-UX(IPF):

P-1J12-2792 Job Management Partner 1/Automatic Job Management System 3 - Manager version 09-00

P-1J12-2992 Job Management Partner 1/Automatic Job Management System 3 - Agent version 09-00

P-1J2C-6L92 Job Management Partner 1/Base version 09-00

For Solaris 9(SPARC), and Solaris 10(SPARC):

P-9312-2792 Job Management Partner 1/Automatic Job Management System 3 - Manager version 09-00

P-9312-2992 Job Management Partner 1/Automatic Job Management System 3 - Agent version 09-00

P-9D2C-6L92 Job Management Partner 1/Base version 09-00

For AIX:

P-1M12-2792 Job Management Partner 1/Automatic Job Management System 3 - Manager version 09-00

P-1M12-2992 Job Management Partner 1/Automatic Job Management System 3 - Agent version 09-00

P-1M2C-6L92 Job Management Partner 1/Base version 09-00

## ■ Trademarks

400 is a trademark of International Business Machines Corporation in the United States, other countries, or both.

Active Directory is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

AIX is a trademark of International Business Machines Corporation in the United States, other countries, or both.

AS/400 is a trademark of International Business Machines Corporation in the United States, other countries, or both.

CONNECT:Queue is a registered trademark of Sterling Commerce, Inc.

HP NonStop is a trademark of Hewlett-Packard Company.

HP-UX is a product name of Hewlett-Packard Company.

Internet Explorer is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

Itanium is a trademark of Intel Corporation in the United States and other countries.

Java is a registered trademark of Oracle and/or its affiliates.

Lotus Notes is a registered trademark of Lotus Development Corporation.

Microsoft is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

Excel is a registered trademark of Microsoft Corp. in the U.S. and other countries.

Microsoft Exchange server is a product name of Microsoft Corp. in the U.S. and other countries.

Microsoft Mail is a product name of Microsoft Corp.

Microsoft, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other

countries.

Microsoft SQL Server is a product name of Microsoft Corp.

MQSeries is a trademark of International Business Machines Corporation in the United States, other countries, or both.

MVS is a trademark of International Business Machines Corporation in the United States, other countries, or both.

ORACLE is either a registered trademark or a trademark of Oracle Corporation and/or its affiliates in the United States and/or other countries.

Outlook is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

Pentium is a trademark of Intel Corporation in the United States and other countries.

R/3 is a registered trademark or a trademark of SAP AG in Germany and in other countries.

Red Hat is a trademark or a registered trademark of Red Hat Inc. in the United States and other countries.

SAP is a registered trademark or a trademark of SAP AG in Germany and in other countries.

Solaris is a registered trademark of Oracle and/or its affiliates.

SQL\*Plus is either a registered trademark or a trademark of Oracle Corporation and/or its affiliates in the United States and/or other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

Windows Server is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

Windows Vista is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

The following program products contain some parts whose copyrights are reserved by Sun Microsystems, Inc.: P-9312-2792, P-9312-2992, and P-9D2C-6L92.

The following program products contain some parts whose copyrights are reserved by UNIX System Laboratories, Inc.: P-9312-2792, P-9312-2992, and P-9D2C-6L92.

Other product and company names mentioned in this document may be the trademarks of their respective owners. Throughout this document Hitachi has attempted to distinguish trademarks from descriptive terms by writing the name with the capitalization used by the manufacturer, or by writing the name with initial capital letters. Hitachi cannot attest to the accuracy of this information. Use of a trademark in this document should not be regarded as affecting the validity of the trademark.

#### ■ Restrictions

Information in this document is subject to change without notice and does not represent a commitment on the part of Hitachi. The software described in this manual is furnished according to a license agreement with Hitachi. The license agreement contains all of the terms and conditions governing your use of the software and documentation, including all warranty rights, limitations of liability, and disclaimers of warranty.

Material contained in this document may describe Hitachi products not available or features not available in your country.

No part of this material may be reproduced in any form or by any means without permission in writing from the publisher.

Printed in Japan.

#### ■ Edition history

Edition 1 (3020-3-S06-03(E)): November 2009

Edition 1.4 (3020-3-S06-04(E)): November 2010

#### ■ Copyright

Copyright (C) 2009, 2010, Hitachi, Ltd.

Copyright (C) 2009, 2010, Hitachi Solutions, Ltd.

## Summary of amendments

The following table lists changes in this manual (3020-3-S06-04(E)) and product changes related to this manual.

Changes	Location
Descriptions have been changed. For details, see Appendix B.	<i>Appendix B</i>

In addition to the above changes, minor editorial corrections have been made.

---

# Preface

---

This manual describes the environment setting parameters in Job Management Partner 1/Automatic Job Management System 3 (abbreviated hereafter to *JP1/AJS3*).

## Intended readers

This manual is intended for:

- Those who wish to operate an automatic job execution system with JP1/AJS3 and those who design automatic job execution systems.
- Those who operate an automatic job execution system with JP1/AJS3.

## Organization of this manual

This manual organized into the following chapters. The manual is a common reference for all supported operating systems. Any platform-dependent differences in functionality are noted in the manual.

### *1. Overview of the Environment Setting Parameters*

Chapter 1 describes the environment setting parameters in JP1/AJS3.

### *2. Environment Setting Parameters*

Chapter 2 lists the environment setting parameters, and describes how they are defined.

## Related publications

This manual is part of a related set of manuals. The manuals in the set are listed below (with the manual numbers):

### **About JP1/AJS:**

- *Job Management Partner 1/Automatic Job Management System 3 Overview* (3020-3-S02(E))
- *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide* (3020-3-S03(E))
- *Job Management Partner 1/Automatic Job Management System 3 System Design (Work Tasks) Guide* (3020-3-S04(E))
- *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (3020-3-S05(E))
- *Job Management Partner 1/Automatic Job Management System 3 Administration*

*Guide (3020-3-S07(E))*

- *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting (3020-3-S08(E))*
- *Job Management Partner 1/Automatic Job Management System 3 Operator's Guide (3020-3-S09(E))*
- *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1 (3020-3-S10(E))*
- *Job Management Partner 1/Automatic Job Management System 3 Command Reference 2 (3020-3-S11(E))*
- *Job Management Partner 1/Automatic Job Management System 3 Linkage Guide (3020-3-S12(E))*
- *Job Management Partner 1/Automatic Job Management System 3 Messages 1 (3020-3-S13(E))*
- *Job Management Partner 1/Automatic Job Management System 3 Messages 2 (3020-3-S14(E))*
- *Job Management Partner 1/Automatic Job Management System 3 - Definition Assistant Description, Operator's Guide and Reference (3020-3-S17(E))*
- *Job Management Partner 1/Automatic Job Management System 3 - Web Operation Assistant Description, Operator's Guide and Reference (3020-3-S18(E))*
- *Job Management Partner 1/Automatic Job Management System 3 for Enterprise Applications Description, User's Guide and Reference (3020-3-S29(E))*
- *Job Management Partner 1/Automatic Job Management System 2 for Oracle E-Business Suite Description, User's Guide and Reference (3020-3-F27(E))*

**About JP1:**

- *Job Management Partner 1/Base User's Guide (3020-3-R71(E))*
- *Job Management Partner 1/Base Messages (3020-3-R72(E))*
- *Job Management Partner 1/Base Function Reference (3020-3-R73(E))*
- *Job Management Partner 1/Integrated Management - Manager Overview and System Design Guide (3020-3-R76(E))*
- *Job Management Partner 1/Integrated Management - Manager Configuration Guide (3020-3-R77(E))*
- *Job Management Partner 1/Integrated Management - Manager Administration Guide (3020-3-R78(E))*
- *Job Management Partner 1/Integrated Management - Manager GUI Reference*

(3020-3-R79(E))

- *Job Management Partner 1/Integrated Management - Manager Command and Definition File Reference* (3020-3-R80(E))
- *Job Management Partner 1/Integrated Management - Manager Messages* (3020-3-R81(E))
- *Job Management Partner 1/Script Description and Reference* (3020-3-K55(E)), for Windows systems
- *Job Management Partner 1/File Transmission Server/FTP Description, Reference, and Operator's Guide* (3020-3-S36(E)), for Windows systems
- *Job Management Partner 1/File Transmission Server/FTP Description, Reference, and Operator's Guide* (3020-3-S37(E)), for UNIX systems
- *Job Management Partner 1/Software Distribution Description and Planning Guide* (3020-3-S79(E)), for Windows systems
- *Job Management Partner 1/Software Distribution Setup Guide* (3020-3-S80(E)), for Windows systems
- *Job Management Partner 1/Software Distribution System Administrator's Guide Volume 1* (3020-3-S81(E)), for Windows systems
- *Job Management Partner 1/Software Distribution System Administrator's Guide Volume 2* (3020-3-S82(E)), for Windows systems
- *Job Management Partner 1/Software Distribution Automatic Installation Tool Description and Reference* (3020-3-S83(E)), for Windows systems
- *Job Management Partner 1/Software Distribution Administrator Kit Description and Operator's Guide* (3020-3-S84(E))
- *Job Management Partner 1/Software Distribution Client Description and User's Guide* (3020-3-S85(E)), for UNIX systems
- *Job Management Partner 1/Software Distribution SubManager Description and Administrator's Guide* (3020-3-L42(E)), for UNIX systems
- *Job Management Partner 1/Software Distribution Manager Description and Administrator's Guide* (3000-3-841(E))
- *Job Management Partner 1/NQSEEXEC System Administrator's Guide* (3020-3-F30(E))
- *Job Management Partner 1/Consolidated Management 2/Extensible SNMP Agent Description, Operator's Guide and Reference* (3020-3-L04(E)), for UNIX systems
- *Job Management Partner 1/Open Job Entry Description, User's Guide and Reference* (6190-3-365(E)), for VOS3 systems

- *Job Management Partner 1/Open Job Entry Description, User's Guide and Reference* (9000-3-365(E)), for MVS systems
- *Job Management Partner 1/Open Job Entry Description, User's Guide and Reference* (9000-3-366(E)), for OSIV/MSP systems
- *Job Management Partner 1/Open Job Entry for Midrange Computer Description and User's Guide* (9000-3-367(E))

## Conventions: Abbreviations

This manual uses the following abbreviations for product names:

Abbreviation		Full name or meaning
JP1/AJS3	JP1/AJS3 - Manager	Job Management Partner 1/Automatic Job Management System 3 - Manager
	JP1/AJS3 - Agent	Job Management Partner 1/Automatic Job Management System 3 - Agent
	JP1/AJS3 - View	Job Management Partner 1/Automatic Job Management System 3 - View
JP1/AJS2	JP1/AJS2 - Manager	Job Management Partner 1/Automatic Job Management System 2 - Manager
	JP1/AJS2 - Agent	Job Management Partner 1/Automatic Job Management System 2 - Agent
	JP1/AJS2 - View	Job Management Partner 1/Automatic Job Management System 2 - View
JP1/AJS2 - Advanced Manager		Job Management Partner 1/Automatic Job Management System 2 - Advanced Manager <sup>#</sup>
JP1/AJS2 - Client Toolkit		Job Management Partner 1/Automatic Job Management System 2 - Client Toolkit <sup>#</sup>
JP1/AJS3 - Definition Assistant		Job Management Partner 1/Automatic Job Management System 3 - Definition Assistant
JP1/AJS3 - Web Operation Assistant		Job Management Partner 1/Automatic Job Management System 3 - Web Operation Assistant
JP1/AJS3 for Enterprise Applications		Job Management Partner 1/Automatic Job Management System 3 for Enterprise Applications
JP1/AJS2 for Oracle E-Business Suite		Job Management Partner 1/Automatic Job Management System 2 for Oracle E-Business Suite



Abbreviation		Full name or meaning
NNM	HP NNM	HP Network Node Manager Software version 7.5 or earlier
		HP Network Node Manager Software Starter Edition version 7.5 or earlier
JP1/FTP		Job Management Partner 1/File Transmission Server/FTP
JP1/IM	JP1/IM - Manager	Job Management Partner 1/Integrated Management - Manager
	JP1/IM - View	Job Management Partner 1/Integrated Management - View
	JP1/IM - Central Console	Job Management Partner 1/Integrated Manager - Central Console <sup>#</sup>
	JP1/IM - Central Scope	Job Management Partner 1/Integrated Manager - Central Scope <sup>#</sup>
JP1/OJE		Job Management Partner 1/Open Job Entry
JP1/OJE for Midrange Computer		Job Management Partner 1/Open Job Entry for Midrange Computer
JP1/SES		Job Management Partner 1/System Event Service
JP1/OJE for VOS3		VOS3 Job Management Partner 1/Open Job Entry
MSCS		Microsoft(R) Cluster Server
Excel		Microsoft(R) Excel
		Microsoft(R) Office Excel
Exchange Server		Microsoft(R) Exchange 2000 Enterprise Server
		Microsoft(R) Exchange 2000 Server
		Microsoft(R) Exchange Server
IE		Microsoft(R) Internet Explorer(R)
Microsoft Mail		Microsoft(R) Mail
MSMQ		Microsoft(R) Message Queue Server
Outlook	Outlook 2000	Microsoft(R) Outlook(R) 2000

Abbreviation		Full name or meaning
	Outlook 2002	Microsoft(R) Outlook(R) 2002
	Outlook 2003	Microsoft(R) Outlook(R) 2003
	Outlook 2007	Microsoft(R) Outlook(R) 2007
	Outlook Express	Microsoft(R) Outlook(R) Express
Microsoft SQL Server		Microsoft(R) SQL Server
		Microsoft(R) SQL Server Enterprise Edition
Windows 7		Microsoft(R) Windows(R) 7 Enterprise
		Microsoft(R) Windows(R) 7 Professional
		Microsoft(R) Windows(R) 7 Ultimate
Windows Server 2003	Windows Server 2003	Microsoft(R) Windows Server(R) 2003, Enterprise Edition Operating System
		Microsoft(R) Windows Server(R) 2003, Standard Edition Operating System
	Windows Server 2003 (x64)	Microsoft(R) Windows Server(R) 2003, Enterprise x64 Edition
		Microsoft(R) Windows Server(R) 2003, Standard x64 Edition
Windows Server 2008		Microsoft(R) Windows Server(R) 2008 Datacenter
		Microsoft(R) Windows Server(R) 2008 Enterprise
		Microsoft(R) Windows Server(R) 2008 Standard
Windows Vista		Microsoft(R) Windows Vista(R) Business
		Microsoft(R) Windows Vista(R) Enterprise
		Microsoft(R) Windows Vista(R) Ultimate
Windows XP Professional		Microsoft(R) Windows(R) XP Professional Operating System
AIX		AIX 5L 5.3
		AIX V6.1

Abbreviation		Full name or meaning
HP-UX	HP-UX (IPF)	HP-UX 11i V2(IPF)
		HP-UX 11i V3(IPF)
Solaris		Solaris 9(SPARC)
		Solaris 10(SPARC)
SAP BW		SAP Business Information Warehouse
SAP R/3		SAP R/3(R)

#: Version 7

- In this manual, *JP1/AJS* is sometimes used generically, referring to JP1/AJS3 and JP1/AJS2.
- *Windows* is sometimes used generically, referring to Windows 7, Windows Server 2008, Windows Vista, Windows Server 2003, and Windows XP Professional.
- *UNIX* is sometimes used generically, referring to HP-UX, Solaris, and AIX.

This manual also uses the following abbreviations:

Abbreviation	Full name or meaning
ACL	Access Control List
DB	Database
DBMS	Database Management System
DNS	Domain Name System
EUC	Extended UNIX Code
FQDN	Fully Qualified Domain Name
FTP	File Transfer Protocol
GUI	Graphical User Interface
IPF	Itanium(R) Processor Family
ISAM	Indexed Sequential Access Method
LAN	Local Area Network
MAPI	Messaging Application Programming Interface
MIB	Management Information Base

<b>Abbreviation</b>	<b>Full name or meaning</b>
MIME	Multipurpose Internet Mail Extensions
NAT	Network Address Translator
NFS	Network File System
NIC	Network Interface Card
OS	Operating System
RDB	Relational Database
SNMP	Simple Network Management Protocol
SMTP	Simple Mail Transfer Protocol
SUP	Service Using Program
TCP/IP	Transmission Control Protocol/Internet Protocol
UAC	User Account Control
UNC	Universal Naming Convention
WAN	Wide Area Network
WOW64	Windows On Windows 64
WSDL	Web Services Description Language


## **JP1 program reorganization in version 8**

The following changes have been made to the JP1 product suite in version 8:

- JP1/AJS2 - Advanced Manager has been eliminated, and the database provided by JP1/AJS2 - Advanced Manager has been integrated into JP1/AJS2 - Manager in JP1 Version 8.
- JP1/AJS2 - Client Toolkit has been eliminated.
- JP1/AJS2 - View is provided only in the Windows version.

## **Conventions: Diagrams**

This manual uses the following conventions in diagrams:

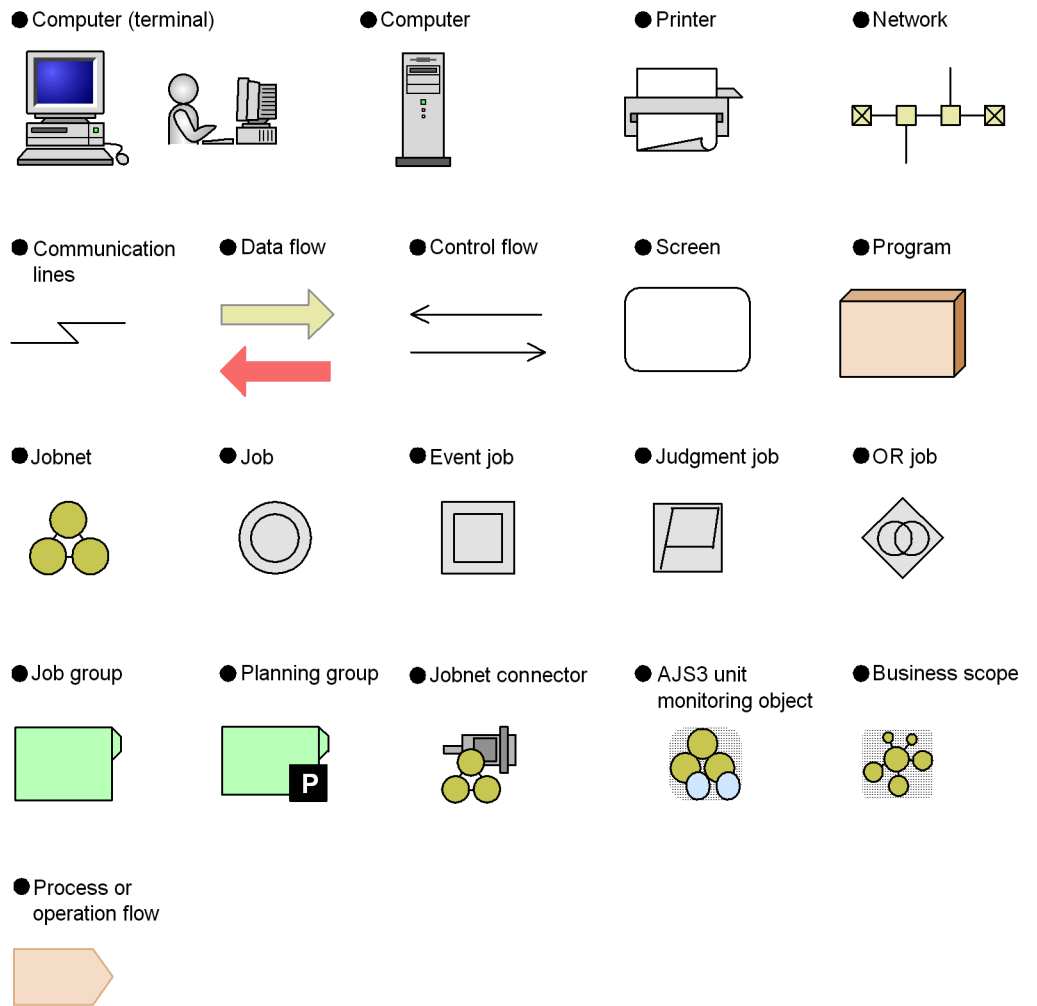

## Conventions: Fonts and symbols

Font and symbol conventions are classified as:

- General font conventions
- Conventions in syntax explanations

These conventions are described below.

### General font conventions

The following table lists the general font conventions:

Font	Convention
<b>Bold</b>	Bold type indicates text on a window, other than the window title. Such text includes menus, menu options, buttons, radio box options, or explanatory labels. For example, bold is used in sentences such as the following: <ul style="list-style-type: none"> <li>• From the <b>File</b> menu, choose <b>Open</b>.</li> <li>• Click the <b>Cancel</b> button.</li> <li>• In the <b>Enter name</b> entry box, type your name.</li> </ul>
<i>Italics</i>	Italics are used to indicate a placeholder for some actual text provided by the user or system. Italics are also used for emphasis. For example: <ul style="list-style-type: none"> <li>• Write the command as follows: <i>copy source-file target-file</i></li> <li>• Do <i>not</i> delete the configuration file.</li> </ul>
Code font	A code font indicates text that the user enters without change, or text (such as messages) output by the system. For example: <ul style="list-style-type: none"> <li>• At the prompt, enter <code>dir</code>.</li> <li>• Use the <code>send</code> command to send mail.</li> <li>• The following message is displayed: <code>The password is incorrect.</code></li> </ul>

Examples of coding and messages appear as follows (although there may be some exceptions, such as when coding is included in a diagram):

```
MakeDatabase
...
StoreDatabase temp DB32
```

In examples of coding, an ellipsis (...) indicates that one or more lines of coding are not shown for purposes of brevity.

### Conventions in syntax explanations

Syntax definitions appear as follows:

```
StoreDatabase [temp|perm] (database-name ...)
```

The following table lists the conventions used in syntax explanations:

Example font or symbol	Convention
<code>StoreDatabase</code>	Code-font characters must be entered exactly as shown.
<i>database-name</i>	This font style marks a placeholder that indicates where appropriate characters are to be entered in an actual command.
<b>SD</b>	Bold code-font characters indicate the abbreviation for a command.
<u>Perm</u>	Underlined characters indicate the default value.
[ ]	Square brackets enclose an item or set of items whose specification is optional.

Example font or symbol	Convention
	Only one of the options separated by a vertical bar can be specified at the same time.
...	An ellipsis (...) indicates that the item or items enclosed in ( ) or [ ] immediately preceding the ellipsis may be specified as many times as necessary.
( )	Parentheses indicate the range of items to which the vertical bar ( ) or ellipsis (...) is applicable.

### Conventions for mathematical expressions

This manual uses the following symbols in mathematical expressions:

Symbol	Meaning
x	Multiplication sign
/	Division sign
↑ ↑	The calculation result is rounded up to the next whole number. Example: The result of $\uparrow 34 / 3 \uparrow$ is 12.
~ (tilde)	The item shown before this symbol must be specified in accordance with the conventions shown for angle brackets, double parentheses, and double angle brackets (below).
< > (angle brackets)	Indicates the characters and lexical elements that can be specified. <characters> One or more Kanji characters, katakana characters, upper-case alphabetic characters, lower-case alphabetic characters, or numeric characters <numeric> 0, 1, 2, 3, 4, 5, 6, 7, 8, or 9 <alphabetic character> A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z, \, #, or @ <alphanumeric character> Alphabetic or numeric character <symbolic name> No more than eight alphanumeric characters beginning with an alphabetic character <unsigned integer> One or more numeric characters <hexadecimal character> 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, or F <file name> A system-determined name assigned to a file <path> The directories contained in the path, with each name separated by a forward slash (/) or backslash (\). The path notation is OS-dependent.

Symbol	Meaning
(( )) (double parentheses)	Indicates the range of specifiable values.
<< >> (double angle brackets)	Indicates the default assumed by the system when a value is unspecified. Example: If you do not specify <i>days-to-keep-form</i> ~<numeric> ((0 to 365)) <<365>>, 365 is assumed as the number of days to keep the form.
MAX	Choose the largest of the calculation results. Example: The result of MAX (3 x 6, 4 + 7) is 18.

### Conventions: KB, MB, GB, and TB

This manual uses the following conventions:

- 1 KB (kilobyte) is 1,024 bytes.
- 1 MB (megabyte) is 1,024<sup>2</sup> bytes.
- 1 GB (gigabyte) is 1,024<sup>3</sup> bytes.
- 1 TB (terabyte) is 1,024<sup>4</sup> bytes.

### Conventions: Meaning of "directory" and "folder"

As a general rule, Windows folder names are used in this manual if they are identical to UNIX directory names.

### Conventions: Meaning of "member of the Administrators group"

The term *member of the Administrators group* in this manual refers to a user who is a member of the Administrators group on the local PC only. The privileges of local users, domain users, and Active Directory users are no different as long as these users are members of the Administrators group on the local PC.

### Conventions: Version numbers

The version numbers of Hitachi program products are usually written as two sets of two digits each, separated by a hyphen. For example:

- Version 1.00 (or 1.0) is written as 01-00.
- Version 2.05 is written as 02-05.
- Version 2.50 (or 2.5) is written as 02-50.
- Version 12.25 is written as 12-25.



The version number might be shown on the spine of a manual as *Ver. 2.00*, but the same version number would be written in the program as *02-00*.

## Default installation folders of JP1/AJS3 for Windows

The default installation folders of JP1/AJS3 for Windows are as follows:

Default installation folders of JP1/AJS3 - Manager:

*system-drive*\Program Files<sup>#1</sup>\HITACHI\JP1AJS2

and

*system-drive*\Program Files<sup>#1</sup>\HITACHI\JP1AJS2CM

Default installation folder of JP1/AJS3 - Agent:

*system-drive*\Program Files<sup>#1</sup>\HITACHI\JP1AJS2

Default installation folder of JP1/AJS3 - View:

*system-drive*\Program Files<sup>#2</sup>\HITACHI\JP1AJS2V

#1

For 64-bit versions of Windows Server 2008 and Windows Server 2003 (x64), replace Program Files with Program Files (x86).

#2

For 64-bit versions of Windows 7, Windows Server 2008, Windows Vista, and Windows Server 2003 (x64), replace Program Files with Program Files (x86).

## Online manual

JP1/AJS3 - View comes with an online manual that you can read in either of the following browsers:

- Microsoft Internet Explorer version 6.0 or later
- Windows Internet Explorer Version 7.0 or later

The online manual has the same contents as the following manuals:

- *Job Management Partner 1/Automatic Job Management System 3 Overview*
- *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*
- *Job Management Partner 1/Automatic Job Management System 3 System Design (Work Tasks) Guide*
- *Job Management Partner 1/Automatic Job Management System 3 Configuration*

### Guide 1

- *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 2*
- *Job Management Partner 1/Automatic Job Management System 3 Administration Guide*
- *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting*
- *Job Management Partner 1/Automatic Job Management System 3 Operator's Guide*
- *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*
- *Job Management Partner 1/Automatic Job Management System 3 Command Reference 2*
- *Job Management Partner 1/Automatic Job Management System 3 Linkage Guide*
- *Job Management Partner 1/Automatic Job Management System 3 Messages 1*
- *Job Management Partner 1/Automatic Job Management System 3 Messages 2*

In JP1/AJS3 - View, you can view the manual by choosing **Help** and then **Contents**. You can also press the **F1** key to view the manual contents. Your Web browser must be associated with a file that has the extension `htm`; otherwise, the online manual will not be displayed correctly. If this happens, associate the `htm` file with the Web browser.

#### Cautionary note

Depending on the OS settings, the online manual might appear in the active window of the browser when you launch the manual from the **Start** menu.

## Organization of JP1/AJS3 manuals and choosing the right manuals

There are fourteen JP1/AJS3 manuals. The following table summarizes their contents.


Note that *Job Management Partner 1/Automatic Job Management System 3* is not listed in the table.

No.	Manual	Contents
1	<i>Overview</i> (3020-3-S02(E))	<ul style="list-style-type: none"><li>• JP1/AJS3 features</li><li>• Description of functions</li></ul>
2	<i>System Design (Configuration) Guide</i> (3020-3-S03(E))	<ul style="list-style-type: none"><li>• Information that must be considered when designing a system</li><li>• Cautionary notes on designing a system</li></ul>

No.	Manual	Contents
3	<i>System Design (Work Tasks) Guide</i> (3020-3-S04(E))	<ul style="list-style-type: none"> <li>• Information that must be considered when constructing jobs and jobnets</li> <li>• Cautionary notes on designing jobs and jobnets</li> </ul>
4	<i>Configuration Guide 1</i> (3020-3-S05(E))	<ul style="list-style-type: none"> <li>• Installation and setup procedures</li> <li>• Environment setup procedure by operation type</li> </ul>
5	<i>Configuration Guide 2</i> (3020-3-S06(E))	<ul style="list-style-type: none"> <li>• Description of environment setting parameters</li> </ul>
6	<i>Administration Guide</i> (3020-3-S07(E))	<ul style="list-style-type: none"> <li>• Information required to operate a system</li> <li>• Know-how useful for JP1/AJS3 operation</li> </ul>
7	<i>Troubleshooting</i> (3020-3-S08(E))	<ul style="list-style-type: none"> <li>• How to troubleshoot errors</li> <li>• Data required when an error occurs</li> </ul>
8	<i>Operator's Guide</i> (3020-3-S09(E))	<ul style="list-style-type: none"> <li>• How to operate JP1/AJS3 - View</li> <li>• How to operate JP1/AJS3 Console View</li> <li>• Description of windows and dialog boxes</li> </ul>
9	<i>Command Reference 1</i> (3020-3-S10(E))	<ul style="list-style-type: none"> <li>• Command syntax</li> </ul>
10	<i>Command Reference 2</i> (3020-3-S11(E))	<ul style="list-style-type: none"> <li>• Syntax of commands used for setup and special operations</li> <li>• Syntax and coding examples of information definition files</li> </ul>
11	<i>Linkage Guide</i> (3020-3-S12(E))	<ul style="list-style-type: none"> <li>• Description of functions that can be used when linked with other products and the setup method</li> </ul>
12	<i>Messages 1</i> (3020-3-S13(E))	<ul style="list-style-type: none"> <li>• Messages output by JP1/AJS3 (messages beginning with KAVC to KAVT)</li> </ul>
13	<i>Messages 2</i> (3020-3-S14(E))	<ul style="list-style-type: none"> <li>• Messages output by JP1/AJS3 (messages beginning with KAVU to KNAD)</li> </ul>

Use the following illustration and table as a guide to determine the manuals you need to read.

Organization of JP1/AJS3 manuals

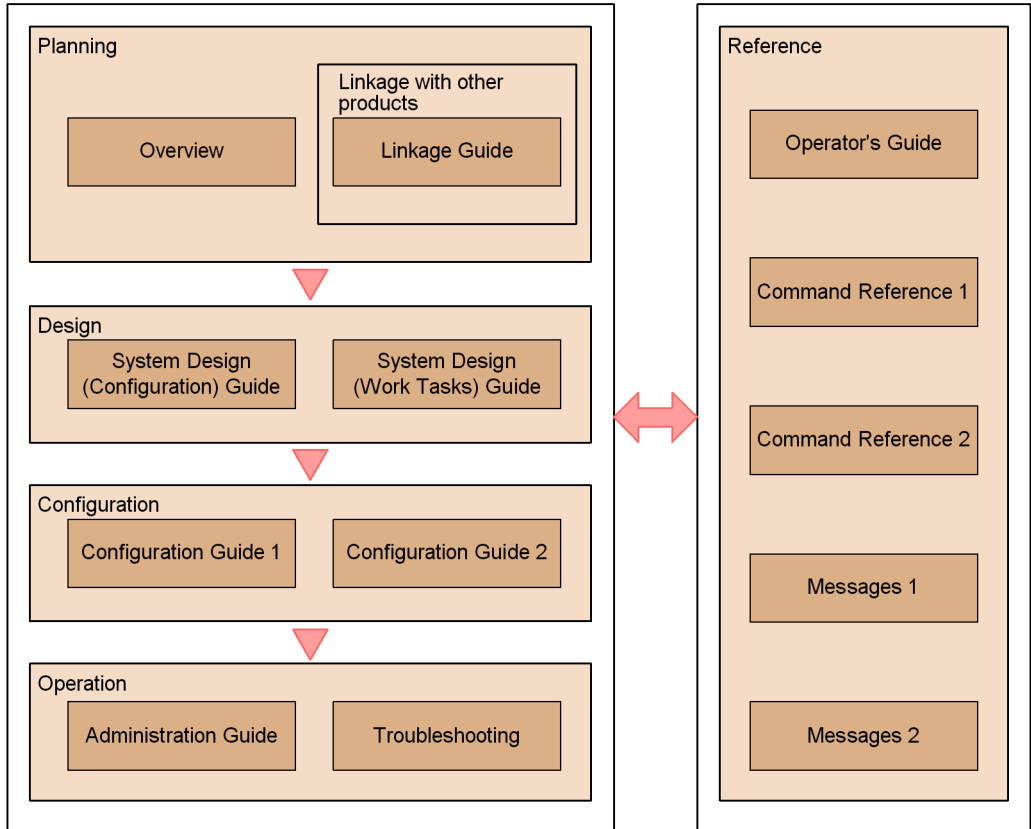

Purpose	Required reading	Read as necessary
To learn about JP1/AJS3's functionalities	<ul style="list-style-type: none"> <li>• <i>Overview</i> (3020-3-S02(E))</li> </ul>	<ul style="list-style-type: none"> <li>• <i>Linkage Guide</i> (3020-3-S12(E))</li> </ul>
To configure a system (including installation and setup) that automatically runs jobs	<ul style="list-style-type: none"> <li>• <i>System Design (Configuration) Guide</i> (3020-3-S03(E))</li> <li>• <i>Configuration Guide 1</i> (3020-3-S05(E))</li> </ul>	<ul style="list-style-type: none"> <li>• <i>Configuration Guide 2</i> (3020-3-S06(E))</li> <li>• <i>Linkage Guide</i> (3020-3-S12(E))</li> </ul>
To design work tasks that will be automated (including job definitions and schedule definitions)	<ul style="list-style-type: none"> <li>• <i>System Design (Work Tasks) Guide</i> (3020-3-S04(E))</li> </ul>	<ul style="list-style-type: none"> <li>• <i>Operator's Guide</i> (3020-3-S09(E))</li> </ul>

Purpose	Required reading	Read as necessary
To learn about monitoring and maintaining a running system.	<ul style="list-style-type: none"> <li>• <i>Administration Guide</i> (3020-3-S07(E))</li> </ul>	<ul style="list-style-type: none"> <li>• <i>Troubleshooting</i> (3020-3-S08(E))</li> <li>• <i>Messages 1</i> (3020-3-S13(E))</li> <li>• <i>Messages 2</i> (3020-3-S14(E))</li> </ul>
To learn about what action to take for problems that occur during operation.	<ul style="list-style-type: none"> <li>• <i>Troubleshooting</i> (3020-3-S08(E))</li> </ul>	<ul style="list-style-type: none"> <li>• <i>Messages 1</i> (3020-3-S13(E))</li> <li>• <i>Messages 2</i> (3020-3-S14(E))</li> </ul>
To learn about operating JP1/AJS3	<ul style="list-style-type: none"> <li>• <i>Operator's Guide</i> (3020-3-S09(E))</li> </ul>	<ul style="list-style-type: none"> <li>• <i>Command Reference 1</i> (3020-3-S10(E))</li> <li>• <i>Command Reference 2</i> (3020-3-S11(E))</li> </ul>

## Regular expressions available in JP1/AJS3

Regular expressions can be used in some items in dialog boxes and commands. For details about regular expressions in Windows, see the *Job Management Partner 1/Base User's Guide*. For details about regular expressions in UNIX, see your UNIX documentation.

The regular expressions that you can use when executing an event job on a Windows host depend on the JP1/Base settings. For details on setting regular expressions for event job execution, see the explanation about extending the available regular expressions in the *Job Management Partner 1/Base User's Guide*.

Searching may take a long time if you often use the regular expression `.*` (which means match any character or characters). In long messages, use `.*` only where necessary. In UNIX, you can use `[^ ]*` (repeat characters other than space characters) instead of `.*` when you want to find a match other than space characters. Using `[^ ]*` reduces the search time.

## About NNM linkage

JP1/AJS3 supports linkage with the following products:

- HP Network Node Manager Software version 6 or earlier
- HP Network Node Manager Starter Edition Software version 7.5 or earlier

In this manual, these products are indicated as *HP NNM*.

Note that linkage with the following products is not supported:

- HP Network Node Manager i Software v8.10

---

# Contents

---

<b>Preface</b>	i
Intended readers .....	i
Organization of this manual .....	i
Related publications .....	i
Conventions: Abbreviations .....	iv
JP1 program reorganization in version 8 .....	viii
Conventions: Diagrams .....	viii
Conventions: Fonts and symbols .....	ix
Conventions: KB, MB, GB, and TB .....	xii
Conventions: Meaning of "directory" and "folder" .....	xii
Conventions: Meaning of "member of the Administrators group" .....	xii
Conventions: Version numbers .....	xii
Default installation folders of JP1/AJS3 for Windows .....	xiii
Online manual .....	xiii
Organization of JP1/AJS3 manuals and choosing the right manuals .....	xiv
Regular expressions available in JP1/AJS3 .....	xvii
About NNM linkage .....	xvii
<b>1. Overview of the Environment Setting Parameters</b>	<b>1</b>
1.1 Format of the environment setting parameters .....	2
<b>2. Environment Setting Parameters</b>	<b>3</b>
2.1 Setting up the system management environment .....	4
2.2 Setting up the scheduler service environment .....	18
2.3 Setting up the job execution environment .....	97
2.4 Setting up the event/action control environment .....	172
2.5 Setting for the JP1/AJS3 definition pre-check function .....	194
2.6 Setting up the communication control environment .....	199
2.7 Setting up the queueless job execution environment .....	203
2.8 Setting up the JP1/AJS3 Console environment .....	223
2.9 Setting up JP1/AJS3 shared information .....	233
<b>Appendixes</b>	<b>239</b>
A. Version Revisions .....	240
A.1 Revisions in 09-00 .....	240
A.2 Revisions in 08-00 .....	243
A.3 Revisions in 07-50 .....	244
A.4 Revisions in 07-00 .....	247

B. Changes in 3020-3-S06-04(E)..... 249

C. Glossary..... 252

**Index**..... 267

---



## Chapter

---

# 1. Overview of the Environment Setting Parameters

---

This chapter describes the environment setting parameters in JP1/AJS3.

### 1.1 Format of the environment setting parameters

---

## 1.1 Format of the environment setting parameters

---

This section describes the format of the definition keys and environment setting parameters used in this manual.

### (1) Definition keys

*Definition keys* are written in the following format:

[*name-of-definition-key*]

- The name of each definition key name is enclosed in square brackets ( [ ] ).
- In the {JP1\_DEFAULT | *logical-host-name*} part, enter JP1\_DEFAULT for the physical host, and enter the name of a logical host for *logical-host-name*.

### (2) Environment setting parameters

*Environment setting parameters* are written in the following format:

"*name-of-environment-setting-parameter*"=*definition*

- The name of an environment setting parameter is enclosed in double quotation marks ( " ).
- If a string is specified for a definition, the definition is enclosed in double quotation marks. If a numeric value is specified for a definition, dword: precedes the value.
- If multiple values are allowed for the definition of an environment setting parameter, the values are separated by a colon ( : ). Note that you must specify at least one value.

Example:

If the definition key is

{backup:export:name:print:schedule:show:rgexport:release}, you can specify more than one of the following values:

backup, export, name, print, schedule, show, rgexport, and release

## Chapter

---

# 2. Environment Setting Parameters

---

This chapter lists the environment setting parameters, and describes how they are defined.

- 2.1 Setting up the system management environment
- 2.2 Setting up the scheduler service environment
- 2.3 Setting up the job execution environment
- 2.4 Setting up the event/action control environment
- 2.5 Setting for the JP1/AJS3 definition pre-check function
- 2.6 Setting up the communication control environment
- 2.7 Setting up the queueless job execution environment
- 2.8 Setting up the JP1/AJS3 Console environment
- 2.9 Setting up JP1/AJS3 shared information

## 2.1 Setting up the system management environment

The system management environment requires different settings in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

The table below describes the environment setting parameters to be used to set the system management in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column. To determine whether an environment setting parameter is to be set in the manager environment (JP1/AJS3 - Manager) or the agent environment (JP1/AJS3 - Agent), see the *Applicable product* column.

Table 2-1: Environment setting parameters (system management)

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[{{JP1_DEFAULT logical-host-name}}\JP1AJS2]#	"SEND_PROCESS_TERMINATED_ABNORMALLY_EVENT" =	Whether a JP1 event is issued when a process terminates abnormally or times out at startup (used in an ISAM configuration to ensure compatibility)	Windows UNIX	M, A
2		"SEND_PROCESS_RESTART_EVENT" =	Whether a JP1 event is issued when a process is restarted (used in an ISAM configuration to ensure compatibility)	Windows UNIX	M, A
3		"SEND_SYSTEM_STARTSTOP_EVENT" =	Whether a JP1 event is issued when JP1/AJS3 starts or stops	Windows UNIX	M, A
4		"SEND_SYSTEM_CHILD_STARTSTOP_EVENT" =	Whether a JP1 event is issued when a process starts or stops	Windows UNIX	M
5		"SEND_SYSTEM_TERMINATED_ABNORMALLY_EVENT" =	Whether a JP1 event is issued when a process terminates abnormally or times out at startup	Windows UNIX	M, A
6		"SEND_SYSTEM_RESTART_EVENT" =	Whether a JP1 event is issued when a process is restarted	Windows UNIX	M, A

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
7	[{{JP1_DEFAULT logical-host-name}}\JP1AJS2\HOST]#	"AJSSYS DIR" =	The system folder of a host	Windows UNIX	M
8		"AJSLOGDIR" =	The log folder of a host	Windows UNIX	M
9		"HOSTLOGSIZE" =	The size of the scheduler log file of a host	Windows UNIX	M
10		"HOSTLOGFILE1" =	The name of the scheduler log file 1 of a host	Windows UNIX	M
11		"HOSTLOGFILE2" =	The name of the scheduler log file 2 of a host	Windows UNIX	M
12		"HOSTLOGOUTPUT YEAR" =	Setting for whether the year in the date of a host's scheduler log is to be output	Windows UNIX	M
13		"HOSTLOGHEADER" =	Whether a host's scheduler log history information is to be output with the process ID added	Windows UNIX	M
14		"HLOGDLOG" =	Setting for whether to output the start and stop history of the scheduler-log output process (ajshlogd.exe in Windows, or ajshlogd in UNIX) to the scheduler log for hosts	Windows UNIX	M
15		"HLOGSYSLOG" =	In Windows: Setting for whether to output the start and stop history of the scheduler-log output process ajshlogd.exe to the Windows event log and the integrated trace log for hosts  In UNIX: Setting for whether to output the start and stop history of the scheduler-log output process ajshlogd to the syslog file and the integrated trace log for hosts	Windows UNIX	M

## 2. Environment Setting Parameters

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
16	[ {JP1_DEFAULT   <i>logical-host-name</i> } \ JP1AJS2\LOG_CON TROL\JAJS_SPM]	"LOGSIZE" =	The size of the system management log	Windows UNIX	M, A
17		"LOGFILENUM" =	The number of system management log files	Windows UNIX	M, A

Legend:

M: JP1/AJS3 - Manager

A: JP1/AJS3 - Agent

#

Specify JP1\_DEFAULT for the physical host. For *logical-host-name*, specify the name of a logical host.

The following describes each of the environment setting parameters:

Parameters that are not described here are used for maintenance purposes. Do not change the values of those parameters.

The default value is used whenever a value is not specified for an environment setting parameter.

**(1) "SEND\_PROCESS\_TERMINATED\_ABNORMALLY\_EVENT"=dword:Whether-to-issue-a-JP1-event-when-a-process-terminates-abnormally-or-times-out-at-startup**

Use this parameter to specify whether to issue a JP1 event when a process terminates abnormally or times out at startup.

This parameter is valid only in an ISAM configuration to ensure compatibility. If you upgrade from an old version, the setting for this parameter is inherited.

Specifiable values

0

A JP1 event is not issued.

1

A JP1 event is issued.

Default value

dword:00000000 (0 in decimal)

## Recommended value

Set the value appropriate for the operating environment.

## When the setting takes effect

The next time the JP1/AJS3 service starts

**(2) "SEND\_PROCESS\_RESTART\_EVENT"=dword:whether-to-issue-a-JP1-event-when-a-process-is-restarted**

Use this parameter to specify whether to issue a JP1 event when the process is restarted.

This parameter is valid only in an ISAM configuration to ensure compatibility. If you upgrade from an old version, the setting for this parameter is inherited.

## Specifiable values

0

A JP1 event is not issued.

1

A JP1 event is issued.

## Default value

dword:00000000 (0 in decimal)

## Recommended value

Set the value appropriate for the operating environment.

## When the setting takes effect

The next time the JP1/AJS3 service starts

**(3) "SEND\_SYSTEM\_STARTSTOP\_EVENT"=dword:whether-to-issue-a-JP1-event-when-JP1/AJS3-is-started-or-stops**

Use this parameter to specify whether to issue a JP1 event when the JP1/AJS3 service starts or stops.

## Specifiable values

0

A JP1 event is not issued.

1

A JP1 event is issued.

## Default value

## 2. Environment Setting Parameters

dword:00000000 (0 in decimal)

### Recommended value

Set the value appropriate for the operating environment.

### When the setting takes effect

The next time the JP1/AJS3 service starts

### **(4) "SEND\_SYSTEM\_CHILD\_STARTSTOP\_EVENT"=dword:Whether-to-issue-a-JP1-event-when-a-process-is-started-or-stops**

Use this parameter to specify whether to issue a JP1 event when a process starts or stops.

The applicable processes are as follows:

#### In Windows:

- Child process of `jajs_spmd.exe`
- Child process of `jajs_dbmd.exe`, `jajs_hstd.exe`, `jajs_agtd.exe`, and `jajs_schd.exe`

#### In UNIX:

- Child process of `jajs_spmd`
- Child process of `jajs_dbmd`, `jajs_hstd`, `jajs_agtd`, and `jajs_schd`

For details about processes, see the *B.2 Processes (for Windows)* in the manual *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting* or *B.3 Processes (for UNIX)* in the manual *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting*.

### Specifiable values

0

A JP1 event is not issued.

1

A JP1 event is issued.

### Default value

dword:00000000 (0 in decimal)

### Recommended value

Set the value appropriate for the operating environment.

### When the setting takes effect

The next time the JP1/AJS3 service starts



**(5) "SEND\_SYSTEM\_TERMINATED\_ABNORMALLY\_EVENT"=dword:Whether-to-issue-a-JP1-event-when-a-process-terminates-abnormally-or-times-out-at-startup**

Use this parameter to specify whether to issue a JP1 event when a process terminates abnormally or times out at startup.

The applicable processes are as follows:

In Windows:

- Child process of `jajs_spmd.exe`
- Child process of `jajs_dbmd.exe`, `jajs_hstd.exe`, `jajs_agtd.exe`, and `jajs_schd.exe`

In UNIX:

- Child process of `jajs_spmd`
- Child process of `jajs_dbmd`, `jajs_hstd`, `jajs_agtd`, and `jajs_schd`

For details about the processes, see *B.2 Processes (for Windows)* in the manual *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting* or *B.3 Processes (for UNIX)* in the manual *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting*.

Specifiable values

0

A JP1 event is not issued.

1

A JP1 event is issued.

Default value

dword:00000000 (0 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts

**(6) "SEND\_SYSTEM\_RESTART\_EVENT"=dword:Whether-to-issue-a-JP1-event-when-a-process-is-restarted**

Use this parameter to specify whether to issue a JP1 event when a process is restarted.

Specifiable values

## 2. Environment Setting Parameters

0

A JP1 event is not issued.

1

A JP1 event is issued.

Default value

dword:00000000 (0 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts

### **(7) "AJSSYSDIR"="name-of-system-directory"**

Use this parameter to specify the name of the directory in which the JP1/AJS3 system files are to be created. Specify a full path name.

Determine the name based on operating requirements and an estimate of required disk space.

Specifiable values

- In Windows:  
A character string of no more than 180 bytes
- In UNIX:  
A character string of no more than 191 bytes

Do not use either semicolons (;) or spaces ( ).

Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\sys`  
(The default value of %ALLUSERSPROFILE% is `system-drive\ProgramData`.)
- In Windows Server 2003:  
`JP1/AJS3-Manager-installation-folder\sys`
- In UNIX:  
`/var/opt/jp1ajs2/sys/`

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(8) "AJSLOGDIR"="directory-name-for-log"**

Use this parameter to specify the name of the directory in which JP1/AJS3 log files are to be created. Specify a full path name.

Determine the name based on operating requirements and an estimate of the required disk space.

Specifiable values

- In Windows:
  - A character string of no more than 180 bytes
- In UNIX:
  - A character string of no more than 191 bytes

Do not use either semicolons (;) or spaces ( ).

Default value

- In Windows Server 2008:
  - %ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\log  
(The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)
- In Windows Server 2003:
  - JP1/AJS3-Manager-installation-folder*\log
- In UNIX:
  - /var/opt/jp1ajs2/log*

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(9) "HOSTLOGSIZE"=dword:size-of-scheduler-log-file-for-a-host**

Use this parameter to specify the size of log files.

The *ajsinetd* authentication error log (KAVS1009-W) and the log data when *ajshlogd* starts (KAVS0220-I) and when it stops (KAVS0221-I), are output to log files. However, if *host* is output to *AJSLOGOUTPUTDEST*, which is an environment

setting parameter in scheduler service environment settings, the scheduler log of the appropriate scheduler service is output. Accordingly, specify a size sufficient for storing the data of at least one day so that you can check the execution status of a job or jobnet.

For details about how to estimate the log file size when specifying the settings for outputting the scheduler log of a scheduler service, see *3.4.1 Estimating the size of scheduler log files* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

A hexadecimal value (in kilobytes) from 0 to 1E8480 (0 to 2,000,000 in decimal).

If you specify `dword:00000000`, the system does not create a log file.

Default value

`dword:00000000` (0 in decimal)

During a new installation and setup of JP1/AJS3, `dword:00002800` (10,240 in decimal) is specified.

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts

**(10) "HOSTLOGFILE1"="name-of-scheduler-log-file-1-for-a-host"**

Use this parameter to specify a log file name. Specify a full path name.

Specify a file name that is different from the name of the scheduler log file 2 on any other host.

When the amount of information written to this log file equals or is greater than the specified size, the system writes subsequent information to log file 2.

Specify a unique file name that is not used on any other logical host.

In UNIX, you cannot omit this parameter if you use a scheduler log file for a host.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\ajs-host-log1.log` (The default value of `%ALLUSERSPROFILE%` is

*system-drive*\ProgramData.)

- In Windows Server 2003:

*JP1/AJS3-Manager-installation-folder*\log\ajs-host-log1.log

- In UNIX:

*/var/opt/jp1ajs2/log/ajs-host-log1.log*

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(11) "HOSTLOGFILE2"="name-of-scheduler-log-file-2-for-a-host"**

Use this parameter to specify a log file name. Specify a full path name.

Specify a unique file name that is not used on any other logical host.

In UNIX, you cannot omit this parameter when you use a scheduler log file for a host.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\log\ajs-host-log2.log (The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)

- In Windows Server 2003:

*JP1/AJS3-Manager-installation-folder*\log\ajs-host-log2.log

- In UNIX:

*/var/opt/jp1ajs2/log/ajs-host-log2.log*

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(12) "HOSTLOGOUTPUTYEAR"="{yes|no}"**

Use this parameter to specify whether to output the year as part of the date of a host's scheduler log. The scheduler log is specified when you specify the HOSTLOGFILE1

## 2. Environment Setting Parameters

and `HOSTLOGFILE2` environment setting parameters.

Change the parameter value if you use the year to manage scheduler log information.

Specifiable values

`yes`

The year is output. The system outputs the year, month, and day in the date section.

`no`

The year is not output. The system outputs only the month and day in the date section.

Default value

`no`

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts

### (13) "`HOSTLOGHEADER="{none|PID}"`"

Use this parameter value to specify whether to output the history information with the process ID added in a host's scheduler log file.

Change the parameter value to output history information without adding process ID information.

Specifiable values

`none`

A process ID is not added to the history information to be output.

`PID`

A process ID is added to the history information to be output.

Default value

`none`

During a new installation and setup of JP1/AJS3, `PID` is set.

Recommended value

`PID`

When the setting takes effect

The next time the JP1/AJS3 service starts

**(14) "HLOGDLOG"="{none|all}"**

Use this parameter value to specify whether to output the start and stop messages related to the scheduler-log output process (`ajshlogd.exe` in Windows, or `ajshlogd` in UNIX) to the scheduler log for hosts.

Specifiable values

none

Does not output messages related to starting and stopping the scheduler-log output process for hosts.

all

Outputs messages KAVS0220-I and KAVS0221-I, which are the messages related to starting and stopping the scheduler-log output process for hosts.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts or stops

**(15) "HLOGDSYSLOG"="{none|all}"**

In Windows:

Use this parameter value to specify whether to output the start and stop messages related to the scheduler-log output process `ajshlogd.exe` to the Windows event log and the integrated trace log for hosts.

In UNIX:

Use this parameter value to specify whether to output the start and stop messages related to the scheduler-log output process `ajshlogd` to the syslog and the integrated trace log for hosts.

Specifiable values

none

Does not output messages related to starting and stopping the scheduler-log output process for hosts.

all

Outputs messages KAVS0220-I and KAVS0221-I, which are the messages

related to starting and stopping the scheduler-log output process for hosts.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts or stops

**(16) "LOGSIZE"=dword:size-of-the-system-management-log**

Use this parameter to specify the size of the system management log.

Specifiable values

A hexadecimal value (in bytes) from 1000 to 7FFFFFFF (4,096 to 2,147,483,647 in decimal)

Default value

dword:1F400 (128,000 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

Cautionary note

If the value specified for the log file size and the number of log files are too small, you might not be able to identify the cause of an error. When you change the log file size, do not specify a log file size smaller than the default value.

**(17) "LOGFILENUM"=dword:Number-of-system-management-log-files**

Use this parameter to specify the number of system management log files.

Specifiable values

A hexadecimal value from 1 to 10 (1 to 16 in decimal)

Default value

dword:00000003 (3 in decimal)

Recommended value

Default value

When the setting takes effect



The next time the JP1/AJS3 service starts

Cautionary note

If the value specified for the log file size and the number of log files are too small, you might not be able to identify the cause of an error. When you change the number of log files, do not specify a value smaller than the default value.

## 2.2 Setting up the scheduler service environment

To set up the scheduler service environment, perform the necessary setup operations in the manager environment (JP1/AJS3 - Manager). Nothing is required in the agent environment (JP1/AJS3 - Agent).

The table below describes the environment setting parameters to be used to set the scheduler service environment in the manager environment (JP1/AJS3 - Manager).

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column.

Table 2-2: Environment setting parameters (scheduler service environment setup)

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[JP1_DEFAULT\JP1AJSMANAGER]	"DEFAULTSERVICENAME"=#1	The name of the default scheduler service	Windows UNIX	M
2		"REMNETSERVICENAME"=#1	The name of the scheduler service that executes a remote jobnet	Windows UNIX	M
3		"TRACELOGFILE"=#1	The name of the scheduler trace log file	Windows UNIX	M
4		"VRSHIFT_INTERRUPT"=#1	Whether a jobnet stops immediately when it is interrupted or killed	Windows UNIX	M
5		"VRSHIFT_INTERRUPTRERUN"=#1	Whether succeeding units are rerun when a jobnet is interrupted	Windows UNIX	M
6		"IPC_REMOTE_TIMEOUT"=#1	Remote communication timeout	Windows UNIX	M
7		"IPC_LOCAL_TIMEOUT"=#1	Local communication timeout	Windows UNIX	M
8		"IPC_RETRY_INTERVAL"=#1	Retry interval	Windows UNIX	M
9		"IPC_RETRY_COUNT"=#1	Retry count	Windows UNIX	M

No .	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
10	[ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJSMANAGER] #2	"EVENTRETRY"=#1	The action to be taken for an event service connection failure	Windows UNIX	M
11		"MONLOG"=#1	Whether messages related to establishing and terminating connections from JP1/AJS3 - View to the scheduler service are to be output to the scheduler log	Windows UNIX	M
12		"REUSELOGON"=#1	The method used to start the logon-session process	Windows	M
13		"LOGONSHMAX"=#1	The number of sessions that can share logon resources	Windows	M
14		"MAXSESSION"=#	The maximum number of simultaneous sessions	Windows UNIX	M
15		"AJSINETDLOGSIZE"=#	The size of the ajsinetd internal log	Windows UNIX	M
16		"MONSYSLOG"=#	In Windows: Whether messages related to starting and terminating the ajsinetd process and the monitor server are to be output to the Windows event log  In UNIX: Whether messages related to starting and terminating the ajsinetd process and the monitor server are to be output to the integrated trace log.	Windows UNIX	M
17		"AUTHLOG"=#	Whether messages related to user authentication are to be output to the scheduler log	Windows UNIX	M

2. Environment Setting Parameters

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
18		"AUTHSYSLOG" "="	In Windows: Whether messages related to user authentication are to be output to the Windows event log and integrated trace log  In UNIX: Whether messages related to user authentication are to be output to the syslog and integrated trace log	Windows UNIX	M
19		"HIDEOTHERLHOST" =	The scheduler services to be displayed for a login to JP1/AJS3 - View	Windows UNIX	M
20	[ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJSMANAGER \ <i>scheduler-service-name</i> ] #2	"AUTORESTARTCOUNT" =	The number of attempts to be made to restart the scheduler service	Windows UNIX	M
21		"RESTARTCLRTIME" =	The period of time until the restart count is cleared	Windows UNIX	M
22		"MASTERDABEND" =	The action to be taken for a scheduler service error	Windows UNIX	M
23		"AJSLOGOUTPUTDEST" =	The output-destination setting for the scheduler log file	Windows UNIX	M
24		"LOGSIZE" =	The size of the scheduler log file (when the file is output by a scheduler service)	Windows UNIX	M
25		"AJSLOGFILE1" =	The name of scheduler log file 1	Windows UNIX	M
26		"AJSLOGFILE2" =	The name of scheduler log file 2	Windows UNIX	M
27		"LOGDLOG" =	Whether log data about starting and terminating the scheduler log output process ( <i>ajslogd.exe</i> for Windows and <i>ajslogd</i> for UNIX) is to be output to the scheduler log	Windows UNIX	M

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
28		"LOGDSYSLOG" "="	In Windows: Whether log data about starting and terminating the scheduler log output process (ajslogd.exe) is to be output to the Windows event log and the integrated trace log  In UNIX: Whether log data about starting and terminating the scheduler log output process (ajslogd) is to be output to syslog and the integrated trace log	Windows UNIX	M
29		"AJSLOGOUTPUTYEAR"=	Whether the year in a scheduler log date is to be output	Windows UNIX	M
30		"AJSLOGOUTPUTEXTEND"=	The setting for extended output of a scheduler log	Windows UNIX	M
31		"AUTOSTART"= =	Whether a scheduler service is to be started automatically	Windows UNIX	M
32		"SESSIONTIMEOUT"= =	The connection timeout period	Windows UNIX	M
33		"AJSSERVICEID"= =	The scheduler service identification number	Windows UNIX	M
34		"ISAMWRITEMODE"= =	The write mode for updating an ISAM file	Windows UNIX	M
35		"TABLENAMEPREFIX"= =	The table name prefix	Windows UNIX	M
36		"TABLENAMEPOSTFIX"= =	The table ID	Windows UNIX	M
37		"RDBAUTHID"= =	The RDB permission identifier	Windows UNIX	M
38		"RDBUSER"= =	The RDB access user name	Windows UNIX	M
39		"RDBPASSWORD"= =	The RDB user password	Windows UNIX	M

## 2. Environment Setting Parameters

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
40		"RDBCHECKINTERVAL" =	The RDB server disconnection detection interval	Windows UNIX	M
41		"RDBHOST" =	The name of the host at the RDB connection destination	Windows UNIX	M
42		"RDBPORT" =	RDB port number	Windows UNIX	M
43		"RDBIPC" =	The method used to communicate with the RDB server	Windows UNIX	M
44		"RDBSENDMEMSIZE" =	The size of send-data memory for RDB interprocess memory communication	Windows UNIX	M
45		"RDBRECVMEMSIZE" =	The size of receive-data memory for RDB interprocess memory communication	Windows UNIX	M
46		"RDBCONNECTWAITTIME" =	The maximum wait time for connection to RDB	Windows UNIX	M
47		"AJSCHARCODE" =	Character set	Windows UNIX	M
48		"AJSTMPDIR" =	The name of the directory for temporary files	Windows UNIX	M
49		"JOBINFDIR" =	The name of the directory for job error information	Windows UNIX	M
50		"AJSBKUROOT" =	The name of the directory for backup information	Windows UNIX	M
51		"HNTRLOGLEVEL" =	The level of the messages to be output to the integrated trace log file	Windows UNIX	M
52		"SYSLOGCODE" =	The character set for outputting a log file	UNIX	M

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
53		"AJSSYSLOG" =	In Windows: Whether messages about starting and terminating a scheduler service are to be output to the Windows event log  In UNIX: Whether messages about starting and terminating a scheduler service are to be output to the syslog file	Windows UNIX	M
54		"NETSYSLOG" =	In Windows: Whether messages about starting and ending a jobnet are to be output to the Windows event log  In UNIX: Whether messages about starting and ending a jobnet are to be output to the syslog file	Windows UNIX	M
55		"JOBSYSLOG" =	In Windows: Whether messages about starting and ending a job in a jobnet are to be output to the Windows event log  In UNIX: Whether messages about starting and ending a job in a jobnet to be output to be output to the syslog file	Windows UNIX	M
56		"AJSLOG" =	Whether messages about starting and terminating a scheduler service are to be output to the scheduler log file	Windows UNIX	M
57		"NETLOG" =	Whether messages about starting and ending a jobnet are to be output to the scheduler log file	Windows UNIX	M
58		"JOBLOG" =	Whether messages about starting and ending a job in a jobnet are to be output to the scheduler log file	Windows UNIX	M

2. Environment Setting Parameters

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
59		"OPELOG" =	Whether the operation log is to be output	Windows UNIX	M
60		"LOGINFOALL" =	The output format of logs	Windows UNIX	M
61		"REFLOG" =	Whether the reference log is to be output	Windows UNIX	M
62		"LOGHEADER" =	Whether log information is to be output with the process ID added	Windows UNIX	M
63		"INFOLOG" =	Whether the information log is to be output	Windows UNIX	M
64		"ROOTJOBNET SCHEDULERANGE" =	The valid range for a root jobnet schedule	Windows UNIX	M
65		"VIEWSTATUS RANGE" =	The range of the generation information used as the basis for acquiring the status (definition for displaying the status in JP1/AJS3 - View)	Windows UNIX	M
66		"STARTMODE" =	The startup mode of a scheduler service	Windows UNIX	M
67		"OVERSCHEDULE" =	The mode for skipping a jobnet	Windows UNIX	M
68		"SUPPRESS" =	Whether the execution of a job in the jobnet and a jobnet is suppressed	Windows UNIX	M
69		"EXECDEFER" =	The repeat method of a jobnet	Windows UNIX	M
70		"JOBSTATUSPORT" =	The service name of the port used to acquire the job status	Windows UNIX	M
71		"QUEUELESSMULTIREQ" =	The maximum number of queueless job requests	Windows UNIX	M
72		"UNITDEFINE RELOAD" =	Whether the jobnet definition is updated as soon as it is changed	Windows UNIX	M



No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
73		"MAXSAVEGEN" =	The maximum number of saved generations	Windows UNIX	M
74		"AJSPRINTNETSCHPRF" =	The method for handling the schedule rules of nested jobnets	Windows UNIX	M
75		"SUBMITRETRYINTERVAL" =	The retry interval for submit processing	Windows UNIX	M
76		"JOBEXECIPCBUFSIZE" =	The size of the job execution information communication buffer for a scheduler service	Windows UNIX	M
77		"BACKGROUNDLEAVE" =	The method used to delete generations due to cancellation of registration or management of the number of saved generations	Windows UNIX	M
78		"REQDAGTREQCONNECTTIMEOUT" =	The timeout period for communication with the queueless agent service	Windows UNIX	M
79		"REQDAGTRECCONNECTTIMEOUT" =	The timeout period for recovery processing for communication with a queueless agent service	Windows UNIX	M
80		"COMMANDEVENT" =	Whether a JP1 event is issued when a command is executed or an operation is executed from JP1/AJS3 - View	Windows UNIX	M
81		"NONRELOADHOLDING" =	Whether the definition of a unit on hold is reloaded	Windows UNIX	M
82		"RJCUSE" =	Whether the execution order of root jobnets spread among different scheduler services is to be controlled by using a jobnet connector	Windows UNIX	M

2. Environment Setting Parameters

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
83		"JOBDELAYWARNMSG" =	Whether a start message is to be output to the integrated trace log when a scheduler service is started. The start message is generated when the scheduler service is stopped, if a job whose termination delay is monitored in accordance with a period of time required for the execution restarts its operation in the agent.	Windows UNIX	M
84		"FGRECONLMT" =	The number of reconnection attempts when the flow control process cannot communicate with the scheduler service inter-communication control process	Windows UNIX	M
85		"SAVEGENTYPE" =	The method for managing the number of logs to keep resulting from the execution of a jobnet for which start conditions are defined	Windows UNIX	M
86		"AJSDBTYPE" =	The database type	Windows UNIX	M
87		"AJSDBDIRECTORY" =	The name of the database directory	Windows UNIX	M
88		"AJSSYSYSDIR" =	The system folder of each scheduler service	Windows UNIX	M
89		"AJSLOGDIR" =	The log folder of each scheduler service	Windows UNIX	M
90	[{JP1_DEFAULT logical-host-name}\JP1AJS2\GATEWAY]#2	"GWMAXCONNECTION" =	The maximum number of concurrent connections for the scheduler service inter-communication control process (ajsgwd.exe for Windows and ajsgwd for UNIX)	Windows UNIX	M

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
91		"GWPROCESSH A" =	Whether the process that manages the scheduler service inter-communication control process (ajsgwmasterd.exe for Windows and ajsgwmasterd for UNIX) terminates when the scheduler service inter-communication control process (ajsgwd.exe in Windows and ajsgwd in UNIX) terminates abnormally	Windows UNIX	M
92		"GWRESTARTCOUNT" =	The number of times automatic restart is to be attempted when the scheduler service inter-communication control process terminates abnormally	Windows UNIX	M

## Legend:

M: JP1/AJS3 - Manager

#1

Specify this item directly under the [JP1\_DEFAULT\JP1AJSMANAGER] key.

#2

Specify JP1\_DEFAULT for the physical host. For *logical-host-name*, specify the name of a logical host.

## Note:

You can specify a maximum of 20 scheduler services for the physical and logical hosts on a machine. Specify a service name that is unique among all physical hosts of the local host and all logical hosts. For the service name, specify a character string of no more than 30 bytes. You can use alphanumeric characters and the following symbols:

!, #, \$, %, +, - (hyphen), . (period), \_ (underscore)

Do not use any symbols other than those above.

If you use an invalid character, the command interpreter will not correctly recognize the scheduler service name when it analyzes the command line, and a failure might occur.

## 2. Environment Setting Parameters

The following describes each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change the values of those parameters.

The default value is used whenever a value is not specified for an environment setting parameter.

### (1) **"DEFAULTSERVICENAME"="name-of-default-scheduler-service"**

Use this parameter to specify the name of the default scheduler service.

If you have not specified the target scheduler service name (for example, when you execute a command), the system executes processing by using the scheduler service specified in this parameter.

If you execute a command that performs an operation on a unit in an environment in which there are multiple scheduler services, you can omit the `-F schedule-service-name` option.

Specifiable values

A character string of no more than 30 bytes

Default value

AJSROOT1

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

When a process starts

### (2) **"REMNETSERVICENAME"="name-of-scheduler-service-executing-a-remote-jobnet"**

Use this parameter to specify the name of the scheduler service that executes a remote jobnet. If you omit this parameter, the scheduler service cannot execute the remote jobnet even if requested to by another host.

Specifiable values

A character string of no more than 30 bytes

Default value

None

Recommended value

Hitachi does not recommend that remote jobnet operation be used.

When the setting takes effect

Immediately (when a remote jobnet process is running)

**(3) "TRACELOGFILE"="*name-of-scheduler-trace-log-file*"**

Use this parameter to specify the name of the file to which the trace information of the scheduler service is output. Specify a full path name.

If you omit this parameter, trace information is not output.

The system records the scheduler trace information for the physical host and all logical hosts in the file specified in this parameter. Specify the name of a file on the local disk so that trace information will be reliably recorded.

Because the system creates a new file whenever trace information is output, do not specify the name of an existing file.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\tracelog` (The default value of `%ALLUSERSPROFILE%` is *system-drive*\ProgramData.)

- In Windows Server 2003:

`JP1/AJS3-Manager-installation-folder\log\tracelog`

- In UNIX:

`/var/opt/jp1ajs2/log/tracelog`

Recommended value

Default value

When the setting takes effect

When a process starts

**(4) "VRSHIFT\_IMMINT"="{V5|V6}"**

Use this parameter to specify whether to immediately change the jobnet status (that is, whether to immediately stop a jobnet) when you interrupt or kill the root jobnet while a scheduler service is suppressing job execution.

Specifiable values

V5

The jobnet status is changed immediately.

## 2. Environment Setting Parameters

V6

The jobnet status is changed when the suppression of job execution is canceled.

Default value

V5

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

### (5) "VRSHIFT\_INTRERUN"="{V5|V6}"

Use this parameter to specify whether to rerun the succeeding units of a nested jobnet that has been interrupted.

Change the parameter value if you do not want to rerun the succeeding units.

In an interrupted nested jobnet, there are some units whose execution has not terminated. Specify V5 to give priority to rerunning the units that follow the interrupted nested jobnet without also executing the units that have not terminated.

This parameter is effective when there is an interrupted nested jobnet before a unit that is to be rerun.

When there is no interrupted nested job ahead of the units to be rerun, but there is a nested job that has ended abnormally, you can rerun the units regardless of the setting of this parameter.

Specifiable values

V5

The units following an interrupted nested jobnet are rerun.

V6

The units following an interrupted nested jobnet are not rerun.

Default value

V6

During a new installation and setup of JP1/AJS3, V5 is set.

Recommended value

V5

When the setting takes effect

When the scheduler service starts

**(6) "IPC\_TIMEOUT"=dword:remote-communication-timeout-period**

Use this parameter to specify the time to wait (timeout) for the originator to start communication with another host.

Customize this parameter if you want to quickly detect, on a fast network connecting machines, a machine that has failed to be activated.

Specify a value other than 0 when you want to set an explicit timeout period rather than depend on the OS timeout period.

For this parameter, the originator's settings are used for execution of the following operations:

- When execution of a remote jobnet starts or ends  
(Between the originator's JP1/AJS3 - Manager and the destination JP1/AJS3 - Manager)
- When you execute operation commands remotely for a job or jobnet  
(From the originator's JP1/AJS3 - Manager to the destination JP1/AJS3 - Manager)
- When you execute a command from a menu by choosing **Management**, **JP1AJS3 management**, and **JP1AJS3 status** from HP NNM  
(From JP1/AJS3 - Manager at the NNM end to the monitored JP1/AJS3 - Manager)

If the originator is unable to start communication when the timeout period specified in this parameter expires, an error occurs.

Specifiable values

A hexadecimal value (in seconds) from 0 to 258 (0 to 600 in decimal)

When `dword:00000000` is specified, control is determined by the OS timeout period.

Default value

`dword:00000000` (0 in decimal)

Recommended value

Default value

When the setting takes effect

When a process starts

**(7) "IPC\_LOCALTIMEOUT"=*dword:local-communication-timeout***

Use this parameter to specify the time that the system will wait (timeout) for the originator to start communication for interprocess communication related to a JP1/AJS3 scheduler service. Because this parameter is used for internal processing, use only the standard setting.

Specify a value other than 0 when you want to use an explicit timeout period rather than depend on the timeout period of the OS.

If the originator cannot start communication when the timeout period specified for this parameter expires, an error occurs.

Specifiable values

A hexadecimal value (in seconds) from 0 to 3C (0 to 60 in decimal)

When `dword:00000000` is specified, control is determined by the OS timeout period.

Default value

`dword:00000000` (0 in decimal)

Recommended value

Default value

When the setting takes effect

When a process starts

**(8) "IPCRETRYINTERVAL"=*dword:retry-interval***

Use this parameter to specify the retry interval when a communication error occurs.

Change this parameter to a value appropriate for the communication error status. If you change the parameter value, you also have to change the `IPCRETRYCOUNT` environment setting parameter value (retry count).

Each time a retry occurs, the specified value is incremented.

Specifiable values

A hexadecimal value (in seconds) from 0 to A (0 to 10 in decimal)

Default value

`dword:00000001` (1 in decimal)

Recommended value

Default value

When the setting takes effect



When a process starts

**(9) "IPCRETRYCOUNT"=*dword:retry-count***

Use this parameter to specify the number of retries attempted when a communication error occurs.

Change this parameter to a value appropriate for the communication error status. If you change this parameter value, you also have to change the `IPCRETRYINTERVAL` environment setting parameter value (retry interval).

When there is a heavy concentration of scheduler service interprocess communication, a temporary communication error might occur. Specify a value larger than the default value if you will simultaneously start multiple scheduler services or execute many JP1/AJS3 commands at one time.

Specifiable values

A hexadecimal value from 0 to 64 (0 to 100 in decimal)

Default value

`dword:00000003` (3 in decimal)

Recommended value

Default value or a value larger than the default value, depending on operating requirements

When the setting takes effect

When a process starts

**(10) "EVENTRETRY"="{*yes|no*}"**

Use this parameter to specify whether to reconnect to an event service for which a connection error has occurred.

Change this parameter to enable reconnection each time the system outputs a JP1 event.

Use the default value (`no`) if the system does not reference JP1 events (from 4100 to 4142) output from the scheduler service.

Specifiable values

`yes`

An attempt to reconnect to the event service is made the next time an event is output.

If reconnection to the event service is successful, the JP1 event is output. However, note that, because the event service is not reconnected, the JP1 event for the error that occurs is not output (the failed event is not registered)

as a JP1 event).

If you specify `yes`, this function tries to connect to the event service for each event output until reconnection to the event service is successful. Therefore, the job performance might be adversely affected compared to when `no` is specified. Specify `yes` if reconnection to the event service has greater priority than performance.

If you specify `yes`, the system outputs an error message (`KAVS0863-E Interprocess communication failed. :maintenance-information-1, maintenance-information-2, mainetnance-information-3`) each time an error occurs on the connection with an event service. If the connection to the event service is not restored quickly, a large number of log messages will be output.

`no`

JP1 events are not output after an event service connection error occurs.

The event service will be connected again when the JP1/AJS3 service is restarted.

Default value

`no`

Recommended value

`yes`

When the setting takes effect

Immediately

**(11) "MONLOG"="{none|all}"**

Use this parameter to specify whether to output messages related to establishing and terminating connections to the scheduler service from JP1/AJS3 - View to the scheduler log.

Change the parameter value if you want to output the connection status from JP1/AJS3 - View to the scheduler log.

Specifiable values

`none`

Messages related to connections' from JP1/AJS3 - View to the scheduler service are not output.

`all`

Messages related to establishing and terminating connections from JP1/AJS3 - View to the scheduler service (`KAVS0534-I`, `KAVS0535-I`, `KAVS0536-I`, and `KAVS0537-I`) are output.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(12) "REUSELOGON"={yes|no}**

Use this parameter to select the method that will be used to start the logon session process that is executed after a logon using the OS user account.

Specify *yes* when multiple simultaneous sessions are to be mapped to the same OS user and then run, and a lack of desktop heap area prevents the process from starting.

Reuse the logon resources for starting the following processes:

- Connection of JP1/AJS3 - View
- Running a command remotely
- Running a remote jobnet
- Operations from JP1/AJS3 - Definition Assistant

Specifiable values

*yes*

Logon information is saved and reused for the sessions to be mapped to the same OS user.

Specifying *yes* enables these sessions to share desktop heaps, and helps reduce the consumption of the desktop heap area.

If there are multiple simultaneous sessions to be mapped to the same OS user, and the processes cannot be started because desktop heap area is insufficient, specify *yes*. If you specify *yes* and change the OS user information, you must restart the *ajsinetd* process.

*no*

Logon information is not reused for the sessions to be mapped to the same OS user.

Default value

no

Recommended value

yes

When the setting takes effect

When the `ajsinetd` process starts.

For details about how to start and stop the `ajsinetd` processes individually, see `jajs_hstd` in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1* and `jajs_hstd_stop` in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*.

**(13) "LOGONSHMAX"=dword:number-of-logon-sessions-sharing-logon-resources**

When reusing a logon, you need to specify the number of sessions that are allowed to share the logon information.

A new desktop heap is assigned if the number of sessions for the same OS user exceeds the value specified in this parameter.

You can specify this parameter only if you specify `yes` for the `REUSELOGON` environment setting parameter.

Specifiable values

A hexadecimal value from 1 to 80 (1 to 128 in decimal)

Default value

`dword:00000032` (50 in decimal)

Recommended value

Default value

When the setting takes effect

When the `ajsinetd` process starts.

For details about how to start and stop `ajsinetd` processes individually, see `jajs_hstd` in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1* and `jajs_hstd_stop` in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*.

Supplementary note

How to estimate the number of logon sessions that share the logon resources:

If the desktop heap area is running low, change the number of logon sessions that can share the logon resources to a value in the range indicated below.

For the size of the desktop heap to be assigned to non-interactive processes, see

the *OS documentation*.

*Number-of-logon-sessions-sharing-the-logon-resources < size-of-the-desktop-heap-to-be-assigned-to-a-non-interactive-processes (in kilobytes)/10 (in kilobytes)*

**(14) "MAXSESSION"=dword:maximum-number-of-simultaneous-sessions**

Use this parameter to specify a maximum number of JP1/AJS3 - View connections.

If the maximum number of JP1/AJS3 - View connections will exceed 50, specify an appropriate value. In addition, if there are resource restrictions and you want to limit the number of JP1/AJS3 - View connections, specify a smaller value.

If connection is attempted from JP1/AJS3 - View when the number of times specified here has been reached, the connection will fail.

Specifiable values

A hexadecimal value from 0 to 80 (0 to 128 in decimal)

Default value

dword:00000032 (50 in decimal)

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(15) "AJSINETDLOGSIZE"=dword:size-of-ajsinetd-internal-log**

Use this parameter to specify the size of the `ajsinetd` internal log.

Specifiable values

00000000 or a value in kilobytes from 00000004 to 001E8480 in hexadecimal (in decimal 0 or a value from 4 to 2,000,000)

If you specify `dword:00000000`, the system does not create a log file.

If you omit this parameter, `dword:00000080` is assumed. If the specified value is invalid, `dword:00000000` is assumed.

Default value

dword:00000080 (128 in decimal)

Recommended value

Default value

When the setting takes effect

When the `ajsinetd` process starts.

For details about how to start or stop `ajsinetd` processes individually, see `jajs_hstd` in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1* and `jajs_hstd_stop` in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*.

**(16) "MONSYSLOG"="{none|all}"**

Use this parameter to specify whether to output messages related to starting and terminating the `ajsinetd` process, the `ajsinetd` process for acceptance processing, and the monitoring server to the following logs:

- In Windows:

The Windows event log and integrated trace log

- In UNIX:

The syslog and integrated trace log

Change the parameter value if you do not need to check the connection status in the Windows event log or syslog log from JP1/AJS3 - View. If you change this parameter, you will not be able to check the connection status from JP1/AJS3 - View when an error occurs.

Specifiable values

`none`

The messages related to the `ajsinetd` process and the monitor server, are not output.

`all`

The `ajsinetd` process startup message (KAVS0530-I) and termination message (KAVS0531-I), `ajsinetd` process for acceptance processing startup message (KAVS0532-I) and termination message (KAVS0533-I), and the monitor server startup message (KAVS0534-I) and termination message (KAVS0535-I) are output.

Default value

`none`

During a new installation and setup of JP1/AJS3, `all` is set.

Recommended value

`all`

When the setting takes effect

Immediately (at the next login to JP1/AJS3 - View)

**(17) "AUTHLOG"="{none|all}"**

Use this parameter to specify whether to output the messages related to user authentication to the scheduler log.

Specifiable values

none

Messages related to user authentication are not output.

all

Messages related to user authentication are output.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

Immediately (the next time a user authentication request is received)

**(18) "AUTHSYSLOG"="{none|all}"**

Use this parameter to specify whether to output messages related to user authentication to the following file or logs:

- In Windows:  
The Windows event log and the integrated trace log
- In UNIX:  
The syslog file and the integrated trace log

Specifiable values

none

Messages related to user authentication are not output.

all

Messages related to user authentication are output.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

Immediately (the next time a user authentication request is received)

**(19) "HIDEOTHERLHOST"="{yes|no}"**

Use this parameter to specify the range of the scheduler services to be displayed when you log on to a host from JP1/ASJ3 - View in an environment in which JP1/AJS3 services has been established for logical hosts.

Specifiable values

yes

Only the scheduler service corresponding to the specified host name is displayed when you log on to a host from JP1/AJS3 - View.

no

All defined scheduler services established on the machine are displayed if you log on as a JP1 user mapped to the OS user with superuser permission or the Administrators permission.

If you log on as any other type of user, all defined scheduler services established on hosts that belong to the same user authentication block as the logged-on host are displayed. If any scheduler service other than the one for the logged-on logical host is failed over and does not exist on the logged-on physical host, do not access that scheduler service.

Also, if the `ajsinetd` process is not running on the connection-destination host, you cannot access the scheduler service on that host.

Specify this value if you want to access the scheduler services on all logical hosts in the JP1/AJS3 - Manager to which you log on from JP1/AJS3 - View.

Default value

yes

Recommended value

Default value

When the setting takes effect

Immediately (at the next login to JP1/AJS3 - View)

**(20) "AUTORESTARTCOUNT"=*dword:scheduler-service-restart-count***

Use this parameter to specify the number of times that a scheduler service process will be automatically restarted if it has terminated abnormally.



Specify 0 to immediately stop job execution in JP1/AJS3 when a scheduler service has terminated abnormally. In addition, if you monitor the scheduler service status by executing the `jajs_spm�_status` command or a process, specify 0 for this parameter and `yes` for the `MASTERDABEND` environment setting parameter.

Note that this parameter is valid only in compatible ISAM configuration.

Specifiable values

A hexadecimal value from 0 to 3 (0 to 3 in decimal)

If you specify `dword:00000000`, the scheduler service is not restarted.

If you specify `dword:00000001`, the scheduler service is restarted only once.

Default value

`dword:00000003` (3 in decimal)

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(21) "RESTARTCLRTIME"=*dword:time-to-clear-the-restart-count***

When a process in a scheduler service terminates abnormally and is then restarted, the system assumes normal operation and clears the restart count if the specified time elapses before it stops again. Specify the length of time that the system must operate before the operation is regarded as normal.

When it takes more than three minutes for the scheduler service to start, increase the value if you do not want to restart the system after an abnormal termination.

Note that this parameter is valid only in compatible ISAM configuration.

Specifiable values

A hexadecimal value (in seconds) from B4 to 15180 (180 to 86,400 in decimal)

Default value

`dword:000000B4` (180 in decimal)

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(22) "MASTERDABEND"="{yes|no}"**

Use this parameter to specify whether to stop all scheduler services and terminate the `ajsmasterd` process abnormally if a scheduler service terminates abnormally.

Note that this parameter is valid only in compatible ISAM configuration. In a standard configuration, this parameter is always `no`.

Specifiable values

`yes`

All scheduler services terminate, and the `ajsmasterd` process terminates abnormally.

Specify this value to monitor the operating status of JP1/AJS3 by executing the `jajs_spm�_status` command.

When you do this, you cannot restart the scheduler service by executing the `jajs_spm�` command with the `-n jajs_schđ` option specified. To start the scheduler service, restart the JP1/AJS3 service.

`no`

Not all the scheduler services terminate.

If you specify this value, you can restart the scheduler service by executing the `jajs_spm�` command with the `-n jajs_schđ` option specified.

Default value

`no`

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

- In Windows:

On a logical host in a cluster configuration, if a scheduler service on the logical host terminates abnormally, the system performs the following operation:

- If `yes` is specified, the JP1/AJS3 service on the logical host on which the scheduler service terminated, terminates abnormally.
- If `no` is specified, the JP1/AJS3 service on the logical host on which the scheduler service terminated abnormally, does not terminate.

**- In UNIX:**

If a scheduler service in the JP1/AJS3 service that was started by executing the `jajs_spmd` command with the `-HA` option specified terminates abnormally, the system performs the following operation:

- If `yes` is specified, the JP1/AJS3 service started by the `jajs_spmd` command with the `-HA` option specified terminates.
- If `no` is specified, the JP1/AJS3 service started by executing the `jajs_spmd` command with the `-HA` option specified does not terminate.

Note that even if `yes` is specified, the system restarts the scheduler service only the number of times specified for the `AUTORESTARTCOUNT` environment setting parameter. If the scheduler service terminates abnormally after being restarted the specified number of times, all scheduler services terminate.

**(23) "AJSLOGOUTPUTDEST"="{schedule|host}"**

Use this parameter to specify whether to output the scheduler log by scheduler service or by host. Specify this parameter for each scheduler service.

Specifiable values

`schedule`

The scheduler log for a scheduler service is output to the files specified in the `AJSLOGFILE1` and `AJSLOGFILE2` environment setting parameters.

For each scheduler service, you can estimate and check the log size, and switch and back up logs.

`host`

The scheduler log for a host is output to the file specified in the `HOSTLOGFILE1` and `HOSTLOGFILE2` environment setting parameters.

Although it is necessary to estimate and check the file size, and to switch and back up logs for each host, the system can log the commands that are executed while the scheduler service is not running.

Default value

`schedule`

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(24) "LOGSIZE"=dword:size-of-the-scheduler-log-file (when outputting the scheduler log for a scheduler service)**

Specify the size of the file to which the system outputs the scheduler log file for a scheduler service.

Because this log is used to check the execution status of a job or jobnet, specify a size that is sufficient for storing the log data for at least one day.

For details about how to estimate the size of a scheduler log file, see *3.4.1 Estimating the size of scheduler log files* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

- In Windows:  
0 or a hexadecimal value (in kilobytes) from 4 to 1E8480 (0 or a value from 4 to 2,000,000 in decimal)
- In UNIX:  
A hexadecimal value (in kilobytes) from 0 to 1E8480 (0 to 2,000,000 in decimal)

If you specify `dword:00000000`, the system does not create a log file.

Default value

- In Windows:  
`dword:00001400` (5,120 in decimal)
- In UNIX:  
`dword:00000000` (0 in decimal)

During a new installation and setup of JP1/AJS3, `dword:00002800` (10,240 in decimal) is set.

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(25) "AJSLOGFILE1"="name-of-scheduler-log-file-1"**

Use this parameter to specify the name of a log file. Specify a full path name.

Specify a file name different from the name of scheduler log file 2.

When the amount of information written to this file becomes equal to or greater than the specified size, the system writes subsequent information to log file 2.

Specify a unique file name that is not used on any other logical host.

In UNIX, when you use the scheduler log file, you cannot omit this parameter.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\schedule\scheduler-service-name\ajs-log1.log` (The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)

- In Windows Server 2003:

`JP1/AJS3-Manager-installation-folder\log\schedule\scheduler-service-name\ajs-log1.log`

- In UNIX:

`/var/opt/jp1ajs2/log/schedule/scheduler-service-name/ajs-log1.log`

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(26) "AJSLOGFILE2"="name-of-scheduler-log-file-2"**

Use this parameter to specify the name of a log file. Specify a full path name.

Specify a unique file name that is not used on any other logical host.

In UNIX, when you use the scheduler log file, you cannot omit this parameter.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\schedule\scheduler-service-name\ajs-log2.log` (The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)

- In Windows Server 2003:

*JP1/*  
*AJS3-Manager-installation-folder\log\schedule\scheduler-service-name\ajs-log2.log*

- In UNIX:

*/var/opt/jp1ajs2/log/schedule/scheduler-service-name/ajs-log2.log*

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(27) "LOGDLOG"="{none|all}"**

Use this parameter to specify whether to output the messages related to starting and terminating the scheduler log output process (*ajslogd.exe* for Windows and *ajslogd* for UNIX) to the scheduler log.

Specifiable values

*none*

The messages related to starting and terminating the scheduler log output process is not output.

*all*

The messages related to starting (KAVS0220-I) and terminating (KAVS0221-I) the scheduler log output process, are output.

Default value

*none*

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(28) "LOGDSYSLOG"="{none|all}"**

- In Windows:

Use this parameter to specify whether to output the messages related to starting and terminating the scheduler log output process (*ajslogd.exe*) to the Windows event log and integrated trace log.

- In UNIX:

Use this parameter to specify whether to output the messages related to starting and terminating the scheduler log output process (`ajslogd`) to syslog and integrated trace log.

#### Specifiable values

`none`

The messages related to starting and terminating the scheduler log output process is not output.

`all`

The messages related to starting (KAVS0220-I) and terminating (KAVS0221-I) the scheduler log output process, are output.

#### Default value

`none`

#### Recommended value

Set the value appropriate for the operating environment.

#### When the setting takes effect

When the scheduler service starts or terminates

### **(29) "AJSLOGOUTPUTYEAR"="{yes|no}"**

Use this parameter to specify whether to output the year as part of the scheduler log date.

Change the parameter value if you use the year to manage scheduler log information.

#### Specifiable values

`yes`

The year is output. The system outputs the year, month, and day in the date section.

`no`

The year is not output. The system outputs only the month and day in the date section.

#### Default value

`no`

#### Recommended value

Set the value appropriate for the operating environment.

#### When the setting takes effect

When the scheduler service starts or terminates

**(30) "AJSLOGOUTPUTTEXTEND"="{yes|no}"**

Use this parameter to specify the output format when the system outputs the execution log or operation log of units to the scheduler log.

Change the parameter value if you want to output the operation user type, requester information, and detailed options for command operation to the scheduler log.

If you specify `yes` for this parameter, the system outputs the detailed information to the scheduler log when you execute or manipulate a unit. By using this log, you can verify the validity of an operation. For details about this function and information that can be added, see *C.1 Functions for verifying the legitimacy of JP1/AJS3 operations in the Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

The conditions governing when a log is output and the information to be added when a log is output vary according to the type of log. For details, see *C.1 Log entries output by the scheduler services* in the manual *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting*.

Specifiable values

`yes`

In addition to the information that is output when `no` is selected, detailed information, including operation user type, is also output.

The following information is added to the message:

- Operation user type
- Requester host IP address
- Requester identification information
- Options for command operations
- Unit name

`no`

No additional detailed information, such as operation user information, is output.

Default value

`no`

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect



When the scheduler service starts or terminates

**(31) "AUTOSTART"="{yes|no}"**

Use this parameter to specify whether to automatically start a scheduler service when JP1/AJS3 - Manager is started.

Specifiable values

yes

A scheduler service is automatically started when JP1/AJS3 - Manager starts.

no

A scheduler service is started when the `jajs_spm` command is executed.

Specify this value for a scheduler service that is not necessary during normal operation, such as a scheduler service is used only for testing.

If you specify `no`, the `ajsmasterd` process starts.

Default value

yes

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After JP1/AJS3 is restarted

**(32) "SESSIONTIMEOUT"=dword:connection-timeout-period**

Specify how many minutes it is necessary to wait after the last communication for disconnection from JP1/AJS3 - View.

If the system is unable to communicate with JP1/AJS3 - View for the specified period of time since the last communication, the system assumes that JP1/AJS3 - View has failed and disconnects from JP1/AJS3 - View.

Specifiable values

A hexadecimal value (in minutes) from 1 to 78 (1 to 120 in decimal)

Default value

`dword:00000078` (120 in decimal)

Recommended value

Default value

When the setting takes effect

On connection to JP1/AJS3 - View after a scheduler service has started or terminated

**(33) "AJSSERVICEID"=dword:scheduler-service-id-number**

Use this parameter to specify a scheduler service ID number.

Specify an ID number that is unique among all the physical hosts of the local host and all the logical hosts.

Because the system uses this ID number internally to identify a scheduler service when, for example, a temporary file name or key for interprocess communication is used, do not change the ID number after it has been specified. If you change the ID number, you will need to cold-start the scheduler service.

Specifiable values

A hexadecimal value from 1 to 14 (1 to 20 in decimal)

Default value

None

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(34) "ISAMWRITEMODE"="{flush|noflush|sync}"**

Use this parameter to specify whether to permit synchronous writing when an ISAM file is updated.

Select the writing method appropriate for performance, reliability, and method of operation when an ISAM file is used.

Specifiable values

flush

Data in the buffer in memory is written to a disk each time a write operation finishes.

noflush

Data is written to a disk in response to OS buffering. There is no synchronization with JP1/AJS3 processing.

sync

Synchronous writing is always performed when a file is updated. This writing mode improves reliability, but degrades performance. Note that

synchronous writing is performed only for the status management files of jobs and jobnets. The system uses flush mode to write data to files that store unit definition information.

Default value

`flush`

Recommended value

- For a physical host:  
`flush (flush)`
- For a cluster configuration:  
`sync (synchronization)`

When the setting takes effect

When the scheduler service starts or terminates

**(35) "TABLENAMEPREFIX"="table-name-prefix"**

Use this parameter to specify a character string that will be prefixed to the name of a table that is stored in the scheduler service schema.

This environment setting parameter is set automatically during installation and setup. You do not need to change the value of this parameter.

Specifiable values

An alphanumeric character string of no more than 4 bytes

This value is not case sensitive, and all characters are treated as upper-case characters.

Default value

`AJS`

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

If you change this parameter, you must re-create the scheduler database.

**(36) "TABLENAMEPOSTFIX"="table-ID"**

Use this parameter to specify a character string that will be suffixed to the name of a table that is stored in the scheduler service schema.

If you omit this parameter, you cannot add this character string later.

## 2. Environment Setting Parameters

If you create multiple scheduler services in a single schema by using an RDB, specify a character string in this parameter that is different from the table name.

### Specifiable values

An alphanumeric character string of no more than 4 bytes

This value is not case sensitive, and all the characters are treated as upper-case characters.

### Default value

None

### Recommended value

Set a value appropriate for the operating environment.

### When the setting takes effect

When the scheduler service starts or terminates

If you change this parameter, you must re-create the scheduler database.

### **(37) "RDBAUTHID"="RDB-permission-identifier"**

Use this parameter to specify a permission identifier to be used for setting up and operating the database.

Usually, you do not need to change this value.

### Specifiable values

A value of no more than 8 bytes must be specified if an embedded database is used (when EmbedDB is specified for the AJSDBTYPE environment setting parameter).

### Default value

None

### Recommended value

A value set in JP1/AJS3 - Manager

### When the setting takes effect

When the scheduler service starts or terminates

### **(38) "RDBUSER"="RDB-access-user-name"**

Use this value to define the name of the user who accesses the database.

Usually, you do not need to change this value.

### Specifiable values

A value of no more than 8 bytes must be specified when you use an embedded

database (when EmbedDB is specified for the AJSDBTYPE environment setting parameter).

Default value

None

Recommended value

A value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts or terminates

**(39) "RDBPASSWORD"="RDB-user-password"**

Use this parameter to define a password for enabling access to the database.

Usually, you do not need to change this value.

Specifiable values

A value of no more than 30 bytes must be specified if an embedded database is used (when EmbedDB is specified for the AJSDBTYPE environment setting parameter).

The passwords for an embedded database are not case sensitive. To distinguish between upper-case and lower-case characters, enclose the password character string in exclamation marks (!).

Example: "RDBPASSWORD"="!password!"

Default value

Not specified

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(40) "RDBCHECKINTERVAL"=dword:whether-to-use-the-RDB-server-connection-check-function**

Use this parameter when you use the function for automatically stopping the scheduler service when the scheduler service is no longer able to continue processing for a reason such as a database server stoppage. You use this function to check the connection of the scheduler service to the database server and to automatically stop the scheduler service if it has been disconnected from the database server.

Usually, you do not need to change this parameter.

Specifiable values

A hexadecimal value from 1 to 15180 (1 to 86,400 in decimal)

If you specify a value outside this range, the function is disabled. If the function is disabled, the connection to the database server is not checked, and the scheduler service does not terminate automatically.

Default value

dword:00000000 (0 in decimal)

During a new installation and setup of JP1/AJS3, dword:0000012C (300 in decimal) is set.

Recommended value

dword:0000012C (300 in decimal)

When the setting takes effect

When the scheduler service starts

**(41) "RDBHOST"="RDB-connection-destination-host-name"**

Use this parameter to specify the name of the host on which the database is set up.

Usually, you do not need to change this value.

Specifiable values

A character string of no more than 511 bytes

Default value

None

Recommended value

The value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts or terminates

**(42) "RDBPORT"=dword:RDB-connection-port-number**

Use this parameter to specify the port number for the RDB connection.

Usually, you do not need to change this value.

Specifiable values

A hexadecimal value from 1389 to FFFF (5,001 to 65,535 in decimal) if an embedded database is used (when EmbedDB is specified for the AJSDBTYPE

environment setting parameter).

Default value

None

Recommended value

The value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts or terminates

**(43) "RDBIPC"="{MEMORY|DEFAULT}"**

Use this parameter to specify the method for connecting to the RDB server.

Usually, you do not need to change this value.

Specifiable values

MEMORY

Interprocess memory communication is used for communication with the RDB server.

DEFAULT

TCP/IP communication is used for communication with the RDB server.

Default value

DEFAULT

Recommended value

The value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts or terminates

**(44) "RDBSENDMEMSIZE"=dword:size-of-data-send-memory-for-RDB-interprocess-memory-communication**

Use this parameter to specify the amount of memory used to store send data in interprocess memory communication with the RDB server.

This parameter is valid only if interprocess memory communication is specified as the method of communication with the RDB server (when MEMORY is specified for the RDBIPC environment setting parameter).

Usually, you do not need to change this value.

Specifiable values

Any hexadecimal value (in kilobytes).

However, to use RDB interprocess memory communication with JP1/AJS3, specify a value of `dword:00000008` (8 in decimal) or greater.

If you specify 0, the default RDB value is used.

Default value

Default RDB value

Recommended value

The value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts or terminates

**(45) "RDBRECVMEMSIZE"=`dword:size-of-data-receive-memory-for-RDB-interprocess-memory-communication`**

Use this parameter to specify the amount of memory used to store receive data in interprocess memory communication with RDB.

This parameter is valid only if you specify interprocess memory communication as the method of communication with the RDB server (when `MEMORY` is specified for the `RDBIPC` environment setting parameter).

Usually, you do not need to change this value.

Specifiable values

Any hexadecimal value (in kilobytes).

However, to use the RDB interprocess memory communication with JP1/AJS3, specify a value of `dword:00000040` (64 in decimal) or greater.

If you specify 0, the default RDB value is used.

Default value

Default RDB value

Recommended value

The value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts or terminates

**(46) "RDBCONNECTWAITTIME"=`dword:maximum-wait-time-for-connection-to-RDB`**

Use this parameter to specify the maximum wait time to wait for connection to the



RDB server.

Usually, you do not need to change this value.

Specifiable values

A hexadecimal value (in minutes) from 0 to 3C (0 to 60 in decimal)

If you specify 0, the RDB connection wait function is disabled.

Default value

dword:00000001 (1 in decimal)

Recommended value

The value set in JP1/AJS3 - Manager

When the setting takes effect

When the scheduler service starts

**(47) "AJSCCHARCODE"="{C}"**

Use this parameter to specify the character set for job definition information recorded in the scheduler service database.

Specifiable values

C

ASCII character set

Default value

None

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(48) "AJSTMPDIR"="name-of-directory-for-temporary-files"**

Use this parameter to specify the name of a directory in which temporary JP1/AJS3 files are created. Specify a full path name.

Determine the name based on the operating environment after estimating the amount of required disk space.

For those users who will be executing and referencing jobnets, set the update permission (rwx for UNIX) for this directory. For those users who will only be referencing jobnets, set the operation permission (rx for UNIX).

If an error occurs during operations, a work file might remain under the specified directory.

For this reason, when no JP1/AJS3 services are running (for example, when the system is started), delete files and maintain the directory regularly. Note, however, if an embedded database is used, do not delete any files with names beginning with `pd` (such as `pderr1.trc` and `pderr2.trc`).

Specifiable values

- In Windows:  
A character string of no more than 180 bytes
- In UNIX:  
A character string of no more than 191 bytes

Do not use a semicolon (;) or space ( ).

Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\tmp\schedule` (The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)
- In Windows Server 2003:  
`JP1/AJS3-Manager-installation-folder\tmp\schedule`
- In UNIX:  
`/var/opt/jp1ajs2/tmp/schedule`

When you add a scheduler service, create this directory. Make sure that this directory is neither a directory used by another scheduler service set on the local hosts (the physical host and all the logical hosts) nor a subdirectory of that directory.

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(49) "JOBINFDIR"="job-error-information-directory-name"**

Use this parameter to specify the name of the directory to be used to store the standard error output when a job is executed and if the standard error output file is not specified in the job definition. Specify a full path name.

Determine the name based on the operating environment after estimating the amount of required disk space.

For those users who will be executing and referencing jobnets, set the update permission (`rxw` for UNIX) for this directory. For those users who will only be referencing jobnets, set the operation permission (`rx` for UNIX).

Specifiable values

- In Windows:
  - A character string of no more than 180 bytes
- In UNIX:
  - A character string of no more than 191 bytes

Do not use a semicolon (;) or space ( ).

Default value

- In Windows Server 2008:
  - `%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\jobinf`  
(The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)
- In Windows Server 2003:
  - `JP1/AJS3-Manager-installation-folder\jobinf`
- In UNIX:
  - `/var/opt/jp1ajs2/jobinf`

When you add a scheduler service, create this directory. Make sure that this directory is neither a directory used by another scheduler service set on the local hosts (the physical host and all the logical hosts) nor a subdirectory of that directory.

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(50) "AJSBKUROOT"="backup-information-directory-name"**

Use this parameter to specify the name of the directory to be used to back up units. Specify a full path name.

Determine the name based on the operating environment after estimating the amount of required disk space.

## 2. Environment Setting Parameters

For those users who will be backing up jobnets, set the update permission (rwx for UNIX) for this directory. For those users who will only be restoring jobnets, set the operation permission (rx for UNIX).

### Specifiable values

- In Windows:  
A character string of no more than 180 bytes
- In UNIX:  
A character string of no more than 191 bytes

Do not use a semicolon (;) or space ( ).

### Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\backup\schedule` (The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)
- In Windows Server 2003:  
`JP1/AJS3-Manager-installation-folder\backup\schedule`
- In UNIX:  
`/var/opt/jp1ajs2/backup/schedule`

When you add a scheduler service, create this directory.

### Recommended value

#### Default value

#### When the setting takes effect

When the scheduler service starts or terminates

### **(51) "HNTRLOGLEVEL"="{none|error|warn|info}"**

Use this parameter to specify the level of messages that the scheduler service outputs to the integrated trace log.

### Specifiable values

`none`

No messages are output.

`error`

Error messages are output.

warn

Error and warning messages are output.

info

Error, warning, and information messages are output.

Default value

none

During a new installation and setup of JP1/AJS3, error is set.

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(52) "SYSLOGCODE"="{C}"**

Use this parameter to specify the language type of the messages that are output by the scheduler service to the syslog file.

Specifiable values

C

The messages are output encoded with the English ASCII character set.

Default value

C

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(53) "AJSSYSLOG"="{none|all}"**

Use this parameter to specify whether to output messages related to starting and terminating the scheduler service to the Windows event log or syslog file.

Specifiable values

none

The messages related to starting and terminating the scheduler service is not output.

all

## 2. Environment Setting Parameters

The messages related to starting (KAVS0200-I) and terminating (KAVS0201-I) the scheduler service, are output.

Default value

none

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(54) "NETSYSLOG"="{none|{abend:warning:hold:startdelay:enddelay:condition:execdeffer:connector}|all}"**

Use this parameter to specify whether to output messages related to starting and ending jobnets to the Windows event log or syslog file.

Specifiable values

none

The messages related to starting and ending jobnet are not output.

abend

The abnormal end message for jobnets (KAVS0262-E) is output.

warning

The end with warning message for jobnets (KAVS0268-W) is output.

hold

The on-hold notification message for jobnets (KAVS0270-I) is output.

startdelay

The delayed-start notification message for jobnets (KAVS0275-I) is output.

enddelay

The delayed-end notification message for jobnets (KAVS0276-I) is output.

condition

The notification messages for jobnets reporting the start of start-condition monitoring (KAVS0240-I) and the end of start-condition monitoring (KAVS0241-I) are output.

execdeffer

The deferred-execution message for jobnets (KAVS0279-E) is output.

connector

Error messages related to the connection between the jobnet connector and the connection destination jobnet (KAVS0243-E, KAVS0244-E, KAVS4700-E to KAVS4708-E, KAVS4711-E to KAVS4716-E, and KAVS4730-E to KAVS4733-E) are output.

all

The following messages related to starting and ending jobnets are output:

- Start (KAVS0260-I)
- Normal end (KAVS0261-I)
- Abnormal end (KAVS0262-E)
- End with warning (KAVS0268-W)
- On-hold notification (KAVS0270-I)
- Delayed start (KAVS0275-I)
- Delayed end (KAVS0276-I)
- Start/end of start-condition monitoring (KAVS0240-I and KAVS0241-I)
- Deferred execution (KAVS0279-E)
- All registrations canceled (KAVS0267-I)
- Jobnet connector connection error (KAVS0243-E, KAVS0244-E, KAVS4700-E to KAVS4708-E, KAVS4711-E to KAVS4716-E, and KAVS4730-E to KAVS4733-E)

The KAVS0260-I message (jobnet start) and the KAVS0261-I message (normal end) are output only when `all` is specified.

Default value

`none`

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(55) "JOBSYSLOG"="{none}{abend:warning:hold:enddelay}|all}"**

Use this parameter to specify whether to output messages related to starting and ending the jobs in a jobnet to the Windows event log or syslog file.

### Specifiable values

none

The messages related to starting and ending jobs are not output.

abend

The abnormal end message for jobs (KAVS0265-E) is output.

warning

The end with warning message for jobs (KAVS0269-W) is output.

hold

The on-hold notification message for jobs (KAVS0271-I) is output.

enddelay

The delayed-end message for jobs (KAVS0248-I) is output.

all

The following messages related to starting and ending jobs are output:

- Start (KAVS0263-I)
- Normal end (KAVS0264-I)
- Abnormal end (KAVS0265-E)
- Queuing cancellation (KAVS0266-I)
- End with warning (KAVS0269-W)
- On-hold notification (KAVS0271-I)
- Delayed end (KAVS0248-I)

If you specify a value other than `all`, the start (KAVS0263-I), normal-end (KAVS0264-I), and queuing cancellation (KAVS0266-I) messages will not be output for jobs.

### Default value

none

### Recommended value

Default value

### When the setting takes effect

When the scheduler service starts



**(56) "AJSLOG"="{none|all}"**

Use this parameter to specify whether to output messages related to starting and terminating the scheduler services to the scheduler log file.

Specifiable values

none

The messages related to starting and terminating the scheduler service, are not output.

all

The messages related to starting (KAVS0200-I) and terminating (KAVS0201-I) the scheduler service, are output.

Default value

all

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(57) "NETLOG"="{none|{abend:warning:hold:startdelay:enddelay:condition:execdeffer}|all}"**

Use this parameter to specify whether to output messages related to starting and ending jobnets to the scheduler log file.

Specifiable values

none

The messages related to starting and ending jobnets are not output.

abend

The abnormal end message for jobnets (KAVS0262-E) is output.

warning

The end with warning message for jobnets (KAVS0268-W) is output.

hold

The on-hold notification message for jobnets (KAVS0270-I) is output.

startdelay

The delayed-start notification message for jobnets (KAVS0275-I) is output.

## 2. Environment Setting Parameters

`enddelay`

The delayed-end notification message for jobnets (KAVS0276-I) is output.

`condition`

The notification messages for jobnets reporting the start of start-condition monitoring (KAVS0240-I) and the end of start-condition monitoring (KAVS0241-I) are output.

`execdefer`

The deferred execution message for jobnets (KAVS0279-E) is output.

`all`

The following messages related to starting and ending jobnets are output:

- Start (KAVS0260-I)
- Normal end (KAVS0261-I)
- Abnormal end (KAVS0262-E)
- End with warning (KAVS0268-W)
- On-hold notification (KAVS0270-I)
- Delayed start (KAVS0275-I)
- Delayed end (KAVS0276-I)
- Start of start-condition monitoring notification (KAVS0240-I)
- End of start-condition monitoring notification (KAVS0241-I)
- Deferred execution (KAVS0279-E)
- All registrations canceled (KAVS0267-I)

The KAVS0260-I message (jobnet start), the KAVS0261-I message (normal end), and the KAVS0267-I message (all registrations canceled) are output only when `all` is specified.

Default value

`all`

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

Cautionary note

Note that the default behavior of JP1/AJS3 and JP1/AJS2 version 06-71 and later is to output the start/end of start-condition monitoring notification, deferred execution, and all registration canceled messages for jobnets.

**(58) "JOBLOG"="{none|{abend:warning:hold:enddelay}|all}"**

Use this parameter to specify whether to output messages related to starting and ending jobs in a jobnet to the scheduler log file.

Specifiable values

none

The messages related to starting and ending jobs are not output.

abend

The abnormal end message for jobs (KAVS0265-E) is output.

warning

The end with warning message for jobs (KAVS0269-W) is output.

hold

The on-hold notification message for jobs (KAVS0271-I) is output.

enddelay

The delayed-end notification message for jobs (KAVS0248-I) is output.

all

The following messages related to starting and ending jobs are output:

- Request for event job execution started (KAVS0242-I)
- Start (KAVS0263-I)
- Normal end (KAVS0264-I)
- Abnormal end (KAVS0265-E)
- Queuing cancellation (KAVS0266-I)
- End with warning (KAVS0269-W)
- On-hold notification (KAVS0271-I)
- Submit started (KAVS0278-I)
- Delayed end (KAVS0248-I)

If you specify a value other than `all`, the start (KAVS0242-I, KAVS0263-I, KAVS0278-I), normal-end (KAVS0264-I), and queuing cancellation (KAVS0266-I) messages will not be output for jobs.

## 2. Environment Setting Parameters

Default value

all

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(59) "OPELOG"="{none|alter:stop:entry:leave:plan:intrpt:rerun:kill:change:calendar:delete:restore:define:copy:chgst:suspend:import:start:rgimport:release|all}"**

Use this parameter to specify whether to output operation logs to the scheduler log file.

Specifiable values

none

Operation logs are not output.

alter

The execution log for the `ajsalter` command (log type: C001) is output.

stop

The execution log for the `ajsstop` command (log type: C002) is output.

entry

The operation log recording the registration of jobnets (log type: C101) is output.

leave

The operation log recording the cancellation of jobnet registration (log type: C102) is output.

plan

The operation log recording changes to jobnet plans (log type: C103) is output.

intrpt

The operation log recording the interruption of jobnets (log type: C104) is output.

rerun

The operation log recording the rerunning of jobnets (log type: C105) is output.

kill

The operation log recording killed jobs (log type: C201) is output.

change

The operation log recording changes to units (log type: C301) is output.

calendar

The operation log recording changes to the calendar information (log type: C401) is output.

delete

The operation log recording the deletion of units (log type: C302) is output.

restore

The operation log recording the restoration of units (log type: C303) is output.

define

The operation log recording the definition of units (log type: C304) is output.

copy

The operation log recording the copying and moving of units (log type: C305) is output.

chgst

The operation log recording changes to the job status (log type: C202) is output.

suspend

The operation log recording suspension or the cancellation of the suspended status (log type: C106) is output.

import

The operation log recording the import of units (log type: C306) is output.

start

The execution log for the `ajsstart` command (log type: C003) is output.

rgimport

The operation log recording the import of the registered execution-schedule information (log type: C107, C108) is output.

release

The execution log for the `ajsrelease` command (log type: C307) is output.

all

All operation logs are output.

Default value

all

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(60) "LOGINFOALL"="{yes|no}"**

Use this parameter to specify the format of messages output to the scheduler log file, Windows event log, or syslog file.

Change the parameter value if you do not want to output messages that contain additional information such as the execution ID or the job number.

For details about the logs that can be output to the scheduler log file, see *C.1 Log entries output by the scheduler services* in the manual *Job Management Partner 1/ Automatic Job Management System 3 Troubleshooting*.

Specifiable values

yes

In addition to the message output when `no` is specified, messages are output in a format that includes detailed information such as the execution ID or the job number.

The following information is added to messages:

- *Execution ID* is added to the log data related to starting and ending jobnets and jobs.
- *Job number* is added to the log data related to starting and ending jobs.
- *Host name* is added to log data related to the starting of jobs in the Windows event log or syslog. *Host name* is output to log data related to the ending of jobs, regardless of the setting.
- *Return value* is added to the normal-end log data for jobs.

no

No additional detailed information, such as the execution ID or job number, is output.

Default value

no

During a new installation and setup of JP1/AJS3, *yes* is set.

Recommended value

*yes*

When the setting takes effect

When the scheduler service starts or terminates

**(61) "REFLOG"="{none|{backup:export:name:print:schedule:show:rgexport:release}|all}"**

Use this parameter to specify whether to output reference logs to the scheduler log file.

Specify this parameter when you want to keep logs that will be used by the reference commands, such as `ajsprint`.

Specifiable values

none

No reference logs are output.

backup

The reference log for backed-up units (log type: C504 and C511) is output.

export

The reference log for exported units (log type: C508) is output.

name

The reference log for output of unit names (log type: C507 and C512) is output.

print

The reference log for unit definitions (log type: C503 and C510) is output.

schedule

The reference log for output of jobnet schedule information (log type: C506) is output.

show

The reference log for output of the unit status (log type: C502 and C509) is output.

rgexport

The reference log for exporting the registered execution-schedule information (log type: C513 and C514) is output.

`release`

The execution log for the `ajsrelease` command (log type: C515) is output.

`all`

All reference logs are output:

- Backed-up units (log type: C504 and C511)
- Exported units (log type: C508)
- Output of unit names (log type: C507 and C512)
- Output of unit definitions (log type: C503 and C510)
- Output of jobnet schedule information (log type: C506)
- Output of the unit status (log type: C502 and C509)
- Exported registered execution-schedule information (log type: C513 and C514)
- `ajsrelease` command (log type: C515)

Default value

`all`

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

Cautionary note

The default log file size (LOGSIZE) in version 07-00 and later differs from that in version 06-71 and earlier because some commands for which logs were not output in version 06-71 or earlier have been changed so that operation logs can now be output in version 07-00 and later.

Supplementary note

Reference logs related to abnormal end will be output if you specify one or more of `all`, `backup`, `export`, `name`, `print`, `schedule`, `show`, `rgexport`, and `release`, and specify `yes` for the `AJSLOGOUTPUTTEXTEND` environment setting parameter.

**(62) "`LOGHEADER`"="`{none|PID}`"**

Use this parameter to specify whether to output the log information with the process ID added.



Change the parameter value if you do not want to output log information with the process ID added.

Specifiable values

none

The process ID is not output as part of the log information (the specification in version 06-71 and earlier).

PID

The process ID is output as part of the log information.

Default value

none

During a new installation and setup of JP1/AJS3, PID is set.

Recommended value

PID

When the setting takes effect

When the scheduler service starts or terminates

**(63) "INFOLOG"="{none}{START:REQUEST}|all}"**

Use this parameter to specify whether to output information logs.

Change the parameter value if you do not want to perform any performance evaluations, such as evaluations of the command processing time and the maximum number of concurrently executable commands.

Specifiable values

none

The command execution start log (log type: I001) and the scheduler service request log (log type: I002) are not output.

START

The log recording the applicable command processing started (log type: I001) is output.

REQUEST

The log recording when processing requests from a command to the scheduler service started (log type: I002) is output.

all

The command execution start log (log type: I001) and scheduler service

request log (log type: I002) are output.

Default value

none

During a new installation and setup of JP1/AJS3, all is set.

Recommended value

all

When the setting takes effect

When the scheduler service starts or terminates

**(64) "ROOTJOBNETSCHEDULERANGE"=dword:{00000018|00000030}**

Use this parameter to specify the valid range for the schedule of a root jobnet.

Change the parameter value if you want to set the valid range for the schedule of a root jobnet to 48 hours.

If you change the specified value, the execution schedules of the root jobnet before and after the change will be different, in which case you must review the cold-start and jobnet schedules.

Specifiable values

00000018

The valid range for the schedule of the root jobnet is set to 24 hours.

00000030

The valid range for the schedule of the root jobnet is set to 48 hours.

You can specify `dword:00000030` only if you specify `all` for the `VIEWSTATUSRANGE` environment setting parameter as the range of the generation information to be used as the basis for acquiring the status displayed by JP1/AJS3 - View.

Default value

`dword:00000018` (24 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(65) "VIEWSTATUSRANGE"="{today|all}"**

Use this parameter to specify the range of the generation information to be used as the

basis for acquiring the status to be displayed in JP1/AJS3 - View.

Change the parameter value if you want to determine the status to be displayed from the generation information for the current date between the base times.

Specifiable values

today

The status to be displayed is determined from the generation information for the current date between the base times.

You can specify `today` only if you specify 24 hours as the valid range for the schedule of the root jobnet (`dword:00000018` is specified for the `ROOTJOBNETSCHEDULERANGE` environment setting parameter).

If you specify 48 hours (`dword:00000030` is specified for the `ROOTJOBNETSCHEDULERANGE` environment setting parameter), you cannot specify `today`.

all

The status to be displayed is determined from the information for the generation or scheduled generation within the range of all days, including today.

Default value

all

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(66) "STARTMODE"="{cold|warm|hot}"**

Use this parameter to specify the start mode of the scheduler service that starts when the JP1/AJS3 service is started.

When a scheduler service starts, the start mode determines whether the registration status existing when the scheduler service terminated previously, is preserved or canceled.

For details about the statuses of the jobnets and jobs in each start mode, see 7.2.1(3) *Jobnet and job statuses for each start mode* in the *Job Management Partner 1/ Automatic Job Management System 3 Administration Guide*.

Specifiable values

cold

The registration status existing when the scheduler service was terminated previously, is canceled, and the scheduler service starts.

warm

The registration status existing when the scheduler service terminated previously, is preserved, and the scheduler service starts. However, the jobnet that was being executed the previous time the service terminates is treated as having terminated and is executed according to the schedule for the day on which the scheduler service is currently started.

hot

The registration status existing when the scheduler service terminated previously, is preserved, and the scheduler service starts.

Default value

warm

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(67) "OVERSCHEDULE"="{exec|skip|plan}"**

When a scheduler service starts, if the scheduled execution start time of a jobnet, which is scheduled for execution that day has already passed, use this parameter to specify how to handle execution of the jobnet. If `hot` is specified for the `STARTMODE` environment setting parameter as the scheduler service start mode, all the jobnets are executed regardless of this parameter and the jobnet execution registration options.

If you start the scheduler service by executing the `ajsstart` command, the value of the `OVERSCHEDULE` environment setting parameter is not valid, and operation is determined by the `ajsstart` command. For details about the `ajsstart` command, see *ajsstart* in *2. Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*.

Specifiable values

exec

The jobnets scheduled for execution that day are executed, except in the following cases:

- The scheduled execution time of a jobnet for which you select the **Execute from next time** option in the **Planned time passed when daemon starts** column in the Register for Execution dialog box of JP1/AJS3 - View have already passed when you register the job for

execution.

- The scheduled execution time of a jobnet for which you specify the `-o` option in the `ajsenry` command has already passed when you register the job for execution.

`skip`

All jobnets scheduled for execution that day are executed except those jobs that are scheduled for execution before the scheduler service starts. These jobs are not executed because their status is *skipped so not executed*. In addition, jobnets are not executed in the following cases:

- The scheduled execution time of a jobnet for which you select the **Execute immediately** option in the **Planned time passed when daemon starts** column in the Register for Execution dialog box of JP1/AJS3 - View has already passed when you register the job for execution.
- The scheduled execution time of a jobnet for which you did not specify the `-o` option in the `ajsenry` command has already passed when you register the jobnet for execution.

`plan`

The jobnets scheduled for execution that day are not executed because their status will be *skipped so not executed*. Regardless of the option set when execution was registered, the jobnets scheduled for execution on the day that the scheduler service starts are not executed.

Default value

`exec`

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

#### (68) "**SUPPRESS**"="{*none*|*exec*}"

Use this parameter to specify whether to suppress the execution of jobnets and the jobs in jobnets.

Specifiable values

`none`

The execution of jobs and jobnets is not suppressed.

`exec`

The execution of jobs and jobnets is suppressed.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(69) "EXECDEFER"="{oneday|twoday|unlimit}"**

Use this parameter to specify how long to wait before the status of a root jobnet registered for execution changes to *skipped so not executed* when the jobnet has not been executed and the scheduled start date and time have passed.

This parameter remains in effect regardless of the mode set at execution registration.

If you register a jobnet for immediate execution, the date and time that the jobnet is registered are regarded as the scheduled start date and time.

Specifiable values

oneday

The jobnet status changes to *skipped so not executed* one day after the scheduled date.

twoday

The jobnet status changes to *skipped so not executed* two days after the scheduled date.

unlimit

Although the scheduled date has passed, the jobnet status remains *waiting for start time* or *on hold*.

Default value

oneday

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(70) "JOBSTATUSPORT"="service-name-of-the-port-for-acquiring-job-status"**

Use this parameter to specify the port number of the communication port to be used to

acquire job status information.

To execute multiple scheduler services, you must specify a different service name for each scheduler service and set a unique port number in the `services` file.

Specifiable values

A service name defined in the `services` file

Default value

`jplajs2report`

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(71) "QUEUELESSMULTIREQ"=dword:maximum-number-of-queueless-job-requests**

The number of concurrently requested queueless jobs equals the number of processes communicating with the queueless agent when a queueless job is executed. Use this parameter to specify the number of queueless job request processes (`ajsreqd.exe` for Windows and `ajsreqd` for UNIX) started for each scheduler service.

If distributing queueless jobs will affect job execution performance, specify this parameter only if you increase the number of processes that communicate with the queueless agent services.

Specifiable values

A hexadecimal value from `00000001` to `00000008` (1 to 8 in decimal)

Default value

`dword:00000001` (1 in decimal)

In a queueless job system, distributing queueless jobs does not result in lower-execution performance, so you can use the default value.

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(72) "UNITDEFINERELOAD"="{yes|no}"**

If you change the definition of a job or jobnet after registering execution, use this parameter to specify whether to reload the changed definition just before execution so

that the changes take effect immediately.

Change the value of the parameter if you do not want to immediately apply changes made to the already defined unit information.

Specifiable values

yes

The definition is reloaded immediately before a job or jobnet is executed.

If this value is set, the most recent changes to the definition will take effect for the generation that was being processed when the definition was changed.

no

The definition is not reloaded immediately before a job or jobnet is executed (This is the behavior in JP1/AJS2 06-51 and earlier versions).

If this value is set, the most recent changes to the definition will not take effect for the generation that was being processed when the definition was changed.

Default value

no

During a new installation and setup of JP1/AJS3, `yes` is set.

Recommended value

yes

When the setting takes effect

When the scheduler service starts

Cautionary note

JP1/AJS3 allows you to change the unit definition information that affects the execution of the unit, such as the file name, target host, and hold attribute, during registration for execution. However, some items in the changed unit information will not take effect for the generation that is being processed when you change the definition. For details, see *8.4 Changing the unit definition information during registration for execution* in the *Job Management Partner 1/Automatic Job Management System 3 Administration Guide*.

**(73) "MAXSAVEGEN"=dword:maximum-number-of-saved-generations**

Use this parameter to specify the maximum number of saved generations.

The value specified here is the maximum value that you can define for the number of logs to keep.

Change this value when you want to increase the number of logs to keep to 100 or



more.

When you specify `LEGACY` for the `SAVEGENTYPE` environment setting parameter, the same number of execution results as the number of logs to keep is stored for each of the monitoring generations and execution generations.

When you specify `TOTAL` for the `SAVEGENTYPE` environment setting parameter, the same number of execution results as the number of logs to keep is stored, but in this case, the number of logs to keep is the sum of the number of monitoring generations and execution generations.

Specifiable values

A hexadecimal value from `63` to `3E7` (99 to 999 in decimal)

Default value

`dword:63` (99 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

Cautionary notes

- When you specify `LEGACY` for the `SAVEGENTYPE` environment setting parameter, if you increase the maximum number of specifiable generations, the number of records also increases. Before you increase the maximum number of saved generations, you must reduce the size of each root jobnet. For this purpose, divide the jobnets by applying a countermeasure such as reducing the number of records to be obtained by multiplying the number of logs to keep by the number of units.
- If you increase the number of logs to keep to 100 or more, the versions of all instances of JP1/AJS3 - View must be version 07-00 or later. If you do this in JP1/AJS3 - View version 07-00 or later, and then update the detailed definitions in version of JP1/AJS3 - View earlier than 07-00, only the first two digits of the number of logs to keep appear. As a result, the number of logs to keep could be changed to an undesirable two-digit-number.
- A system for which a smaller value is specified for the maximum number of saved generations might not be able to restore the jobnet definition information defined in a system in which the maximum number of saved generations is increased. For example, suppose you specify 200 as the number of logs to keep for a jobnet in a system in which the maximum number of saved generations is set to 200. If you output this definition information by using the `ajsp rint` command and then try to define this

output information by executing the `ajsdefine` command in a system in which the maximum number of saved generations is set to 150, an error occurs. The reason for the error is that the definition parameters contain a value larger than 150 (200 in this case).

- An error dialog box asking you to change the maximum number of saved generations to a smaller value is displayed if the following sequence of operations is performed. First, you increase the maximum number of saved generations and define a jobnet with many saved generations, and then you reduce the maximum number of saved generations. Next, you open the Define Details window of the jobnet in JP1/AJS3 - View, in which the large value you originally specified for the number of logs to keep is displayed. Finally, you click the **OK** button to close the window.
- If you register a jobnet defined with many saved generations, after increasing the maximum number of saved generations, and then you reduce the maximum number of saved generations, the system saves generations according to the registered maximum number of saved generations.
- If you specify a decimal number exceeding 320 as the maximum number of saved generations, and then set the number of logs to keep to the maximum, the specified number of generations might not be saved, depending on how many future generations there will be. To increase the number of logs to keep, you must accurately estimate the number of future generations to be registered, and then use this estimate to determine the number of logs to keep. For details about the relationship between the numbers of logs to keep and the number of future generations, see *B. List of Limits* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

**(74) "AJSPRINTNETSCHPRF"="{yes|no}"**

Specify whether to enable the scheduler rule, thereby freeing operation from the schedule of the upper-level jobnet, or to delete the scheduler rule, thereby making operation dependent on the schedule of the upper-level jobnet.

This option takes effect when you execute the `ajsprint`, `ajsbackup`, or `ajsexport` command, or choose **Backup** from JP1/AJS3 - View to back up a jobnet created by copying a root jobnet with a schedule rule to a nested jobnet.

Specifiable values

yes

The scheduler rule is enabled. Operation does not depend on the schedule of the upper-level jobnet.

no

The schedule rule is deleted. Operation depends on the schedule of the

upper-level jobnet.

Default value

yes

During a new installation and setup of JP1/AJS3, no is set.

Recommended value

no

When the setting takes effect

When the scheduler service starts

**(75) "SUBMITRETRYINTERVAL"=dword:retry-interval**

If many jobs are executed simultaneously, although they may seem to have been submitted, they will be submitted in some cases they will not actually be queued (that is, their submission will be put on hold).

For such cases, you can use this parameter to specify a value in milliseconds for the period of time that needs to elapse before the submission will be retried.

However, be careful not to specify too small a value as the retry interval, because the system will attempt the job submission many times when there are jobs on hold, increasing the system load.

Specifiable values

A hexadecimal value (in milliseconds) from 00000000 to 00002710 (0 to 10,000 in decimal)

If you omit this parameter or specify an invalid value, the system assumes the default value.

Default value

dword:00000BB8 (3,000 in decimal)

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(76) "JOBEXECIPCBUFSIZE"=dword:buffer-size-for-job-execution-information-communication**

Use this parameter to specify the buffer size to be used for communicating the job execution information of a scheduler service.

Specifiable values

## 2. Environment Setting Parameters

A hexadecimal value (in bytes) from 00001000 to 00100000 (4,096 to 1,048,576 in decimal)

If you omit this parameter or specify an invalid value, the system assumes the default value.

### Default value

dword:00000000 (0 in decimal)

If you do not specify a buffer size for communicating job execution information, the default value is assumed. In this case, the OS socket buffer is used as the default value.

### Recommended value

Default value

When the setting takes effect

When the scheduler service starts

## **(77) "BACKGROUNDLEAVE"="{yes|no}"**

Use this parameter to determine the method to be used to delete generations when canceling registration or managing saved generations.

Change the parameter value if you want to create the generation management subprocess (ajsschbd) in the processing that deletes jobnet registration information so that generations will be deleted in the background.

If you change the value, you must restart the JP1/AJS3 service. You also need to perform migration by using a migration tool or by a cold-start.

For details about how to set the environment setting parameters, see *6.1.6 Changing the mode in which unregistration or generation management deletes the generations of a jobnet* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

### Specifiable values

yes

The generation management subprocess (ajsschbd) is used to delete the registration information of a jobnet.

If you specify *yes*, the generation management subprocess deletes registration information in the background, reducing the turnaround time for registration cancellation. Be careful when you specify *yes*, because doing so causes the system to use more resources for the generation management subprocess.

no

The schedule control process (`ajsschd`) is used to delete the registration information of a jobnet.

If you specify `no`, the schedule control process (`ajsschd`) deletes all the information of the generations to be deleted, increasing the turnaround time for registration cancellation in proportion to the number of generations or units to be deleted.

Default value

`no`

During a new installation and setup of JP1/AJS3, `yes` is set.

Recommended value

`yes`

When the setting takes effect

When the scheduler service starts

**(78) "REQDAGTREQCONNECTTIMEOUT"=dword:timeout-period-for-communication**

Use this parameter to specify how long to wait (the timeout period) for the requesting queueless-job request process to establish communication when connection processing is performed for a processing request (job execution, forced termination, or status confirmation) to a queueless agent service.

For a high-speed network between the manager host and an agent host, specify a smaller value when you want to quickly detect non-starting of an agent host. For a low-speed network and system, or for an environment in which the agent host is likely to be busy, specify a larger value. However, please note when specifying a larger value because a processing request will not be sent to another agent host until connection has been completed or the timeout period expires. If there are no special circumstances, we recommend that you use the default value of 15 seconds.

If communication is not established within the period specified by this parameter, the queueless job request process outputs the KAVS1930-W message and starts the reconnection processing. After the reconnection processing has started, processing requests to other agents that can communicate normally are executed as usual. However, processing requests to other relevant agents accumulate on the manager host as requests to a failed agent, and the reconnection processing is attempted one request at a time in the order they were executed. The timeout period for the reconnection processing differs according to the OS, and the reconnection processing will stop when the maximum communication-recovery-processing timeout period specified in the `REQDAGTREQCONNECTTIMEOUT` environment settings parameter expires. Two reconnection attempts are performed at 60 second intervals, but if recovery is not possible, one of the following error messages is output:

## 2. Environment Setting Parameters

- For a job execution request: KAVS1931-E
- For a request to force the termination of a job: KAVS1932-E
- For a request to confirm the status of a job: KAVS1933-E

If the reconnection is successful, the KAVS1929-I message is output, the accumulated requests are resent in order, and the system recovers from a failure status.

### Specifiable values

A hexadecimal value (in seconds) from 00000000 to 00000258 (0 to 600 in decimal)

If you specify `dword:00000000`, the operation is controlled by the OS timeout period.

### Default value

`dword:0000000F` (15 in decimal)

### Recommended value

Default value

### When the setting takes effect

When the scheduler service starts

## **(79) "REQDAGTRECONNECTTIMEOUT"=`dword:timeout-period-for-communication`**

Specify how long to wait (the timeout period) for the requesting queueless-job request process to establish communication when reconnection processing is performed in either of the following cases:

- When a communication failure occurs for a processing request (job execution, forced termination, of status confirmation) to a queueless agent (the KAVS1930-W message is output)
- When disconnection of the communication line between the manager host and agent host was detected during execution of a job on a queueless agent (the KAVS1922-W message is output) and the system attempts to re-establish communication

This reconnection processing is performed in parallel with a processing request to another agent host.

Therefore, requests to other agent hosts able to perform communication normally do not have until connection is completed or until the timeout period expires.

### Specifiable values

A hexadecimal value (in seconds) from 00000000 to 00000258 (0 to 600 in decimal)

If you specify `dword:00000000`, operation is controlled by the OS timeout period. For details about reconnection processing, see the explanation for the `REQDAGTREQCONNECTTIMEOUT` environment setting parameter that specifies the timeout period for connection processing.

Default value

`dword:0000005A` (90 in decimal)

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(80) "COMMANDEVENT"="{yes|no}"**

Use this parameter to specify whether to issue a JP1 event when a command is executed or an operation is performed in JP1/AJS3 - View.

If you set in the `OPELOG`, `REFLOG`, and `INFOLOG` environment setting parameters that the command operation logs are to be output to the scheduler log, the same information is issued as a JP1 event. However, for the log reporting processing start requests to a scheduler service (log type: I002), no JP1 event is issued.

Specifiable values

yes

A JP1 event is issued when a command is executed or an operation is performed in JP1/AJS3 - View.

no

A JP1 event is not issued when a command is executed or an operation is performed in JP1/AJS3 - View.

Default value

no

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

**(81) "NONRELOADHOLDING"="{yes|no}"**

Use this parameter if a unit definition on hold is not to be reloaded when the function for immediately applying jobnet definition changes (`UNITDEFINERELOAD`) is used. If

you reload the unit definition on hold and change the specification for holding the unit definition from `yes` to `no`, a unit on hold is executed immediately.

Specifiable values

`yes`

A unit definition on hold is not reloaded when the function for immediately applying jobnet definition changes (`UNITDEFINERELOAD`) is used.

`no`

A unit definition on hold is reloaded when the function for immediately applying jobnet definition changes (`UNITDEFINERELOAD`) is used.

Default value

`no`

During a new installation and setup of JP1/AJS3, `yes` is set.

Recommended value

`yes`

When the setting takes effect

When the scheduler service starts

Cautionary note

If you specify `no` for this parameter, and change the hold specification for the unit definition from `yes` to `no`, the unit on hold is executed when:

- Execution of a unit in the same scheduler service starts or ends.
- One of the following operations is executed for a unit in the same scheduler service: `rerun`, `hold`, `release hold`, `suspend`, `release suspension`, or `change schedule`.
- The scheduler service is restarted.
- The `ajsstop` command is executed with the `-r` option specified.

Also note that if many units are on hold (200 units is the recommended maximum, although this limit might vary depending on the environment), more unit definitions must be reloaded than when `yes` is specified, resulting in increased I/O processing.

Specify `no` only if an operation procedure that releases a unit on hold by specifying `no` for the hold specification of the unit definition has been set up and modifying the operation procedure would be difficult.



**(82) "RJCUSE"="{yes|no}"**

Use this parameter to specify whether to control the execution order of root jobnets that have been distributed among different scheduler services by using a jobnet connector.

Specifiable values

yes

Specify this value to control the execution order of root jobnets distributed among different scheduler services.

no

Specify this value if you do not want to control the execution order of root jobnets distributed among different scheduler services.

Default value

no

During a new installation and setup of JP1/AJS3, `yes` is set.

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After JP1/AJS3 service is restarted

**(83) "JOBDELAYWARNMSG"="{yes|no}"**

Use this parameter to specify whether to output a warning message to the integrated trace log when the scheduler service starts. The message that is output is generated if a job for which termination delay is monitored according to the required time for execution is executed on the job execution control agent when a scheduler service has been stopped.

Specifiable values

yes

The KAVS0249-W message is output.

Note, however, that the scheduler service is started in disaster recovery mode, the termination status will be unknown regardless of the job status on the job execution control agent. In this case, the message will not be output.

no

The message is not output.

Default value

no

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts

**(84) "FGRECONLMT"=dword:number-of-reconnection-attempts**

Use this parameter to specify the number of reconnection attempts if the flow control process cannot communicate with the scheduler service inter-communication control process.

Specifiable values

A hexadecimal value from 0 to 64 (0 to 100 in decimal)

Default value

dword:00000003 (3 in decimal)

Recommended value

Default value

When the setting takes effect

When the scheduler service starts

**(85) "SAVEGENTYPE"="{TOTAL|LEGACY}"**

Use this parameter to specify the method used to manage the number of logs to keep of the execution results for a jobnet for which start conditions are defined.

For details about how to manage the number of logs to keep, see *4.2.3 Jobnet generation management* in the manual *Job Management Partner 1/Automatic Job Management System 3 Overview*.

Specifiable values

TOTAL

A new method used from version 9. The number of logs to keep can be specified as the sum of the number of monitoring generations and execution generations.

LEGACY

The legacy management method used through version 8. The number of execution results specified as the number of logs to keep is saved separately for the monitoring generation and the execution generation. Therefore, the number of execution results to be saved is the square of the number specified as the maximum number of saved generations.

## Default value

LEGACY

During a new installation and setup of JP1/AJS3, TOTAL is set.

## Recommended value

TOTAL

## When the setting takes effect

When the scheduler service starts

**(86) "AJSDDBTYPE"="{[ISAM|EmbedDB]"**

Use this parameter to specify the type of database to be used.

Usually, you do not need to change this value.

## Specifiable values

ISAM

The ISAM database is provided as a standard component of JP1/AJS3 - Manager.

EmbedDB

The embedded database can be used as the standard JP1/AJS3 - Manager database.

## Default value

ISAM

During a new installation and setup of JP1/AJS3, EmbedDB is set.

## Recommended value

The value set in JP1/AJS3 - Manager

## When the setting takes effect

When the scheduler service starts or terminates

If you change this parameter, you must re-create the scheduler database.

**(87) "AJSDIRECTORY"="database-directory-name"**

Use this parameter to specify the name of the directory used to store the JP1/AJS3 unit information. Specify a full path name.

Change the parameter value if there is no more available disk space in the default directory or when you need to change the directory to a directory under a shared directory in a cluster configuration.

If you use multiple scheduler services, specify a directory that does not conflict with the directories of other scheduler services.

Specifiable values

- In Windows:  
A character string of no more than 180 bytes
- In UNIX:  
A character string of no more than 191 bytes

Do not use a semicolon (;) or a space ( ).

Default value

During a new installation and setup of JP1/AJS3, the following path is set:

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\database\schedule\AJSROOT1` (The default value of %ALLUSERSPROFILE% is *system-drive\ProgramData*.)
- In Windows Server 2003:  
`JP1/AJS3-Manager-installation-folder\database\schedule\AJSROOT1`
- In UNIX:  
`/var/opt/jp1ajs2/database/schedule/AJSROOT1`

Recommended value

Set the default value or a value appropriate for the operating environment.

When the setting takes effect

When the scheduler service starts or terminates

If you change this parameter, you must re-create the scheduler database.

Cautionary notes

- For those users who define, execute, and reference jobnets, define the following permissions for the directory specified here and the files under the directory:
  - In Windows:  
Read and write permissions
  - In UNIX:  
Update permission (rwx)

- The directory specified here will contain the files needed to perform exclusive editing of the unit, ISAM data files, and key files (if you specify ISAM as the JP1/AJS3 database). Do not delete these files.
- In UNIX, create this directory when you add a scheduler service.
- In UNIX, do not create a symbolic link for a file created in the directory specified in this parameter. If you do so, reorganization will break the link because the file is re-created. Use the directory specified in this parameter if you want to create a symbolic link.

Do not use an NFS or network drive for the directory you specify in this parameter.

**(88) "AJSSYSDIR"="name-of-system-directory"**

Use this parameter to specify the name of the directory in which you create the JP1/AJS3 system files. Specify a full path name.

Determine a name appropriate for the operating environment after estimating the amount of the required disk space.

Specifiable values

- In Windows:
  - A character string of no more than 180 bytes
- In UNIX:
  - A character string of no more than 191 bytes

Do not use a semicolon (;) or a space ( ).

Default value

- In Windows Server 2008:
  - `%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\sys\schedule\scheduler-service-name` (The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)
- In Windows Server 2003:
  - `JP1/AJS3-Manager-installation-folder\sys\schedule\scheduler-service-name`
- In UNIX:
  - `/var/opt/jp1ajs2/sys/schedule/scheduler-service-name`

If you have added a scheduler service, change the default value according to the operating environment.

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(89) "AJSLOGDIR"="name-of-direcotry-for-log-files"**

Use this parameter to specify the name of the directory in which JP1/AJS3 log files are created. Specify a full path name.

Determine a name appropriate for the operating environment after estimating the amount of the required disk space.

Specifiable values

- In Windows:  
A character string of no more than 180 bytes
- In UNIX:  
A character string of no more than 191 bytes

Do not use a semicolon (;) or a space ( ).

Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\schedule\scheduler-service-name` (The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)
- In Windows Server 2003:  
`JP1/  
AJS3-Manager-installation-folder\log\schedule\scheduler-service-name`
- In UNIX:  
`/var/opt/jp1ajs2/log/schedule/scheduler-service-name`

If you have added a scheduler service, change the default value according to the operating environment.

Recommended value

Default value

When the setting takes effect

When the scheduler service starts or terminates

**(90) "GWMAXCONNECTION"=dword:maximum-concurrent-connections**

Use this parameter to specify the maximum number of concurrent connections used for communication by the scheduler service inter-communication control process (ajsgwd.exe for Windows and ajsd for UNIX).

Specify a value equal to the number of JP1/AJS3 - Manager hosts in the system (including both physical and logical hosts). If you specify a value smaller than the actual value, communication with the scheduler service inter-communication control process might fail.

Specifiable values

A hexadecimal value from A to 400 (10 to 1,024 in decimal)

Default value

dword:A (10 in decimal)

Recommended value

The default value or the number of JP1/AJS3 - Manager hosts on which the scheduler service inter-communication control process has been set up.

When the setting takes effect

When the JP1/AJS3 service starts

**(91) "GWPROCESSHA"="{yes|no}"**

Specify whether to terminate the process (ajsgwmasterd.exe for Windows and ajsd for UNIX) that manages the scheduler service inter-communication control process if the scheduler service inter-communication control process (ajsgwd.exe for Windows and ajsd in UNIX) terminates abnormally.

Specifiable values

yes

The process that manages the scheduler service inter-communication control process (ajsgwmasterd.exe for Windows and ajsd for UNIX) is terminated.

In UNIX, you start the JP1/AJS3 service by executing the jajs\_spmd command with the -HA option specified, when using a logical host in a cluster configuration, all instances of the JP1/AJS3 service terminate.

no

The process (ajsgwmasterd.exe for Windows and ajsd for UNIX) that manages the scheduler service inter-communication control process is not terminated.

In UNIX, if you start the JP1/AJS3 service by executing the jajs\_spmd

command with the `-HA` option specified when using a logical host in a cluster configuration, operation can continue. This is because you can use functions other than the execution order control function for root jobs between scheduler services.

Default value

`no`

Recommended value

Default value

When the setting takes effect

When the JP1/AJS3 service starts

**(92) "GWRESTARTCOUNT"=*dword:number-of-restarting-scheduler-service-inter-communication-control-process***

Use this parameter to specify the number of times automatic restart is to be attempted if the scheduler service inter-communication control process terminates abnormally.

Specifiable values

A hexadecimal value from 0 to 3 (0 to 3 in decimal)

Default value

`dword:00000003` (3 in decimal)

Recommended value

Default value

When the setting takes effect

When the JP1/AJS3 service starts



---

## 2.3 Setting up the job execution environment

---

The job execution environment requires different settings in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

The table below lists the environment setting parameters to be used to set the job execution environment in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

The job execution control manager that is started is determined by the database configuration of JP1/AJS3.

For the standard composition

- The job execution control manager for scheduler services, which executes PC jobs, Unix jobs, action jobs, and custom jobs and starts them for each scheduler service
- The job execution control manager for submitted jobs, which executes queue jobs and submitted jobs

For the compatible ISAM configuration

- The job execution control manager for the compatible ISAM configuration, which executes PC jobs, Unix jobs, action jobs, custom jobs, queue jobs, and submitted jobs

For which job execution manager type you need to specify an environment setting parameter, see the *Applicable manager* column.

Some environment setting parameters for scheduler services have two definition keys. One definition key is used to set a value common to all scheduler services (SCHEDULER is part of a key name). The other definition key is used to set a different value for each scheduler service (*scheduler-service-name* is part of a key name). If you specify both definition keys, the definition key for setting a different value for each scheduler service is valid.

For definition keys used to set a common value for the scheduler services, you will see the following text: *For scheduler service (common)*. For definition keys used to set different values for the scheduler services, you will see the following text: *For scheduler service (individual)*.

The job execution control managers for submitted jobs and the compatible ISAM configuration reference the same environment setting parameters. In the *Definition key* column, you will see the following text: *For submitted jobs and the compatible ISAM configuration*.

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column. To determine whether an environment setting

parameter is to be set in the manager environment (JP1/AJS3 - Manager) or the agent environment (JP1/AJS3 - Agent), see the *Applicable product* column.

Cautionary note on limiting resources in the job execution environment for UNIX

If you limit the resources for jobs executed from job execution control, the system might not be able to execute the jobs correctly, depending on the values specified in the environment setting parameters. For example, if you set 0 for the upper limit of the stack segment size, the system might not be able to execute jobs.

Therefore, make sure that you specify either limit values that have sufficient margin or do not specify limits. If you want to set a limit, first execute the `ps` command to check the segment size and CPU time, and then determine the values to be specified based on the data. Note, however, that even if you do not set limits, it does not mean there are no limits on resources. It only means that JP1/AJS3 does not explicitly set limits, and the default limits of the system (the one in which JP1/AJS3 was started) are in effect.

There are some environment setting parameters that are not subject to the OS limits.

If a value larger than the default limit is specified, the job execution user must have the appropriate permission (superuser). If the job execution user does not have the appropriate permission, the resource limit is not set when a job is executed and a warning message (KAVU3587-W) is output to the integrated trace log. That message reports that the job is executed with the default limit.

Limits placed on resources also apply to any child processes created by the job process (unless specific limits are set on a child process).

For AIX, although you use `/etc/security/limits` to define resource limits for the user who executes the job, those values do not take effect when a job is executed. In this case, you need to define resource limits for the user when JP1/AJS3 (root) is started. For details, see *7.4 Notes on using Unix jobs* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Work Tasks) Guide*.

Table 2-3: Environment setting parameters (job execution environment setting)

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
1	[{{JP1_DEFAULT logical-host-name}}\JP1NBQMANAGER\Process]#	"WorkPath" =	Work directory name when a manager process is executed	C	Windows UNIX	M
2		"IsHA" =	Definition for cluster environment setup for manager processes	C, S	Windows UNIX	M
3	[{{JP1_DEFAULT logical-host-name}}\JP1NBQMANAGER\Database]#	"DatabasePath" =	Name of the directory used to store the database	C	Windows UNIX	M
4		"PreserveTerm" =	Number of days that job execution results are retained	C	Windows UNIX	M
5		"StandardTime" =	Standard time for deleting job information	C	Windows UNIX	M
6		"FlashOption" =	Data file update mode	C	Windows UNIX	M
7		"DeleteFlashOption" =	Asynchronous option for job information deletion	C	Windows UNIX	M
8		"PreserveMinute" =	Retention period for information when 0 is specified as the number of days for retaining job information	C	Windows UNIX	M

## 2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
9		"StartUpDelete"=	Option for suppressing job information deletion when the JP1/AJS3 service starts	C	Windows UNIX	M
10		"ColdStartMode"=	Database initialization when the JP1/AJS3 service is cold-started	C	Windows UNIX	M
11	[{JP1_DEFAULT  <i>logical-host-name</i> }\JP1NBQMANAGER\Queue] #	"MaximumQueue"=	Maximum number of definable queues	C	Windows UNIX	M

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
12	<ul style="list-style-type: none"> <li>For scheduler service (common) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ S2\SCHEDULER\QUEUE\MANAGER\Job] #</li> <li>For scheduler service (individual) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ SMANAGER\scheduler-service-name\QUEUE\MANAGER\Job] #</li> <li>For submitted jobs and the compatible ISAM configuration: [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1NB QMANAGER\Job] #</li> </ul>	"MaximumContentJob"=	Maximum number of jobs in the system	C, S	Windows UNIX	M
13		"AlertContentJob"=	Number of warning jobs in the system	C, S	Windows UNIX	M
14		"ReceiveFileSizeStatus"=	Behavior when the size of the job result file or transfer file has reached the upper limit	C, S	Windows UNIX	M
15		"LimitReceiveFileSize"=	Upper limit on the size of the job result file or transfer file	C, S	Windows UNIX	M
16		"ReceiveFileOption"=	Definition for preventing duplicated reception of the job result file	C, S	Windows UNIX	M
17		"QueuingJobRecoveryTime"=	Length of time an agent waits for recovery from a failure occurring in a queuing job	C, S	Windows UNIX	M
18	"ExecutingJobRecoveryTime"=	Length of time an agent waits for recovery from a failure occurring in a running job	C, S	Windows UNIX	M	

2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
19		"MaximumExecJobLogOption"=	Setting for whether to output a message confirming that the maximum number of concurrently executable jobs has been reached	C, S	Windows UNIX	M
20		"MaximumExecJobLogInterval"=	Interval for outputting a message confirming that the maximum number of concurrently executable jobs has been reached	C, S	Windows UNIX	M
21		"PreventChangeJobOrder"=	Setting for preventing changes to the execution order of submitted jobs	C	Windows UNIX	M
22		"EnumJobSaveMemory"=	Setting for reducing the memory consumed by the job execution control manager when job information is enumerated	C	Windows UNIX	M
23		"ExecutingJobChangeStatus"=	Setting for placing all jobs that are being executed in an end status when a communication error occurs	C, S	Windows UNIX	M

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
24	<ul style="list-style-type: none"> <li>For scheduler service (common) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ S2\SCHEDULER\QUEUE\MANAGER\Network]#</li> </ul>	"ConnectTimeout"=	Definition of the TCP/IP connection timeout value on the job execution control manager	C, S	Windows UNIX	M
25	<ul style="list-style-type: none"> <li>For scheduler service (individual) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ SMANAGER\scheduler-service-name\QUEUE\MANAGER\Network]#</li> </ul>	"CommunicateRetryCount"=	Definition of the number of TCP/IP connection error retries on the job execution control manager	C, S	Windows UNIX	M
26	<ul style="list-style-type: none"> <li>For submitted jobs and the compatible ISAM configuration: [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1NB QMANAGER\Network]#</li> </ul>	"CommunicateRetryInterval"=	Definition of the TCP/IP connection error retry interval on the job execution control manager	C, S	Windows UNIX	M

2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
27	<ul style="list-style-type: none"> <li>For scheduler service (common) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ S2 \SCHEDULER \QUEUE \MANAGER \Agent] #</li> <li>For scheduler service (individual) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ SMANAGER \scheduler-service-name \QUEUE \MANAGER \Agent] #</li> <li>For submitted jobs and the compatible ISAM configuration: [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1NB QMANAGER \Agent] #</li> </ul>	"MaximumAgent" =	Maximum number of definable agents	C	Windows UNIX	M
28		"ObserveInterval" =	Agent monitoring interval	C, S	Windows UNIX	M
29		"AutoCreate" =	Control flag for automatic agent definition	C, S	Windows UNIX	M
30		"AutoCreateExecJobs" =	Maximum number of concurrently executable jobs when an agent is defined automatically	C, S	Windows UNIX	M
31		"AutoCreateMaxJobs" =	Maximum number of jobs when an agent is defined automatically	C	Windows UNIX	M
32		"AutoCreateWarnJobs" =	Warning value for the number of jobs when an agent is defined automatically	C	Windows UNIX	M
33		"AutoCreatePriority" =	Agent priority when an agent is defined automatically	C	Windows UNIX	M
34		"LeastRecentlyUsed" =	Definition of the method for determining the agent host to which jobs are distributed	C, S	Windows UNIX	M



No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
35	[{JP1_DEFAULT logical-host-name}\JP1NBQMANAGER\Resource]#	"MaximumResource"=	Maximum number of definable execution-locked resources	C	Windows UNIX	M
36	[{JP1_DEFAULT logical-host-name}\JP1NBQAGENT\Process]#	"WorkPath"=	Name of the work directory when an agent process is executed	--	Windows UNIX	M, A
37		"IsSHA"=	Definition for cluster environment step for agent processes	--	Windows UNIX	M, A
38	[{JP1_DEFAULT logical-host-name}\JP1NBQAGENT\Job]#	"IsExecFindExecutable"=	Definition for executing a job with a long file name	--	Windows	M, A
39		"LoadUserProfile"=	Definition for whether a user profile is loaded	--	Windows	M, A
40		"IsAccessTokenCache"=	Setting for reusing an access token when a job is executed	--	Windows	M, A
41		"DISABLE_FILE_REDIRECTION"=	Setting for disabling file system redirection when jobs are executed in the WOW64 environment	--	Windows	M, A

2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
42		"ENABLE_LOADING_EXT"=	Setting for whether to execute a job specified for an executable file whose extension is 4 bytes or more in an application associated with the executable-file extension	--	Windows	M, A
43		"IsLimitCoreSize"=	Limit flag for the maximum core file size for each process	--	UNIX	M, A
44		"LimitCoreSize"=	Maximum core file size for each process	--	UNIX	M, A
45		"IsLimitDataSize"=	Limit flag for the maximum data segment size for each process	--	UNIX	M, A
46		"LimitDataSize"=	Maximum data segment size for each process	--	UNIX	M, A
47		"IsLimitFileSize"=	Limit flag for the maximum permanent file size for each process	--	UNIX	M, A
48		"LimitFileSize"=	Maximum permanent file size for each process	--	UNIX	M, A
49		"IsLimitMemorySize"=	Limit flag for the maximum memory size for each process	--	UNIX	M, A

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
50		"LimitMemorySize"=	Maximum memory size for each process	--	UNIX	M, A
51		"IsLimitStackSize"=	Limit flag for the maximum stack segment size for each process	--	UNIX	M, A
52		"LimitStackSize"=	Maximum stack segment size for each process	--	UNIX	M, A
53		"IsLimitCpuTime"=	Limit flag for the maximum CPU time for each process	--	UNIX	M, A
54		"LimitCpuTime"=	Maximum CPU time for each process	--	UNIX	M, A
55		"IsLimitWorkingSetSize"=	Limit flag for the maximum working set size for each process	--	UNIX	M, A
56		"LimitWorkingSetSize"=	Maximum working set size for each process	--	UNIX	M, A
57		"IsLimitNoFile"=	Limit flag for the maximum number of file descriptors for each process	--	UNIX	M, A
58		"LimitNoFile"=	Maximum number of file descriptors for each process	--	UNIX	M, A
59		"PipeCommunicationTimeout"=	Definition of the pipe communication timeout value for agents	--	UNIX	M, A

2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
60		"AfterForkPipeTimeout"=	Definition of the timeout value for the job process execution ready notification	--	UNIX	M, A
61		"IsCacheCommandSearchPath"=	Flag for specifying whether to cache the value in the command search path	--	UNIX	M, A
62		"IsUseWorkPath"=	Flag for specifying whether to change the work (current) path when the job is executed	--	UNIX	M, A
63		"IsSigchldDefault"=	Definition for changing the setting of child processes started by JP1/AJS3 to the SIG_DFL setting whereby the SIGCHLD signal is received	--	UNIX	M, A
64		"FileAccessPermissionMode"=	Setting of the method for checking the file access permission when a Unix job is executed	--	UNIX	M, A
65	[ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1NBQAGENT \Network] #	"NotifyJobStateInterval"=	Interval for resending the job result file	--	Windows UNIX	M, A
66		"NotifyJobStateCount"=	Number of times that the job result file is resent	--	Windows UNIX	M, A

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
67		"ConnectTimeout"=	Definition of the TCP/IP connection timeout value on the job execution control agent	--	Windows UNIX	M, A
68		"CommunicateRetryCount"=	Definition of the number of TCP/IP connection error retries on the job execution control agent	--	Windows UNIX	M, A
69		"CommunicateRetryInterval"=	Definition of the TCP/IP connection error retry interval on the job execution control agent	--	Windows UNIX	M, A
70		"LogonUserRetryCount"=	Number of retries for obtaining access tokens when <b>Standard</b> is specified for <b>Exec. service</b>	--	Windows	M, A
71		"LogonUserRetryInterval"=	Retry interval for obtaining access tokens when <b>Standard</b> is specified for <b>Exec. service</b>	--	Windows	M, A
72	[[JP1_DEFAULT logical-host-name]\JP1NBQAGENT\Variable]#	"variable-name"=	Installation directory of an execution program indicated by the variable name on each applicable host	--	Windows UNIX	M, A
73	[[JP1_DEFAULT logical-host-name]\JP1NBQCLIEN T\PathEnv]#	"All Users"=	Search path for a transfer file	--	Windows UNIX	M, A

2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
74		"JP1-user-name"=	Search path for a transfer file	--	Windows UNIX	M, A
75	[ {JP1_DEFAULT   logical-host-name} \JP1NBQCLIEN T\Network] #	"ConnectTimeout"=	Definition of the TCP/IP connection timeout value for the commands and schedulers used to execute jobs	--	Windows UNIX	M, A
76		"CommunicateRetryCount"=	Definition of the number TCP/IP connection error retries for the commands and schedulers used to execute jobs	--	Windows UNIX	M, A
77		"CommunicateRetryInterval"=	Definition of the TCP/IP connection error retry interval for the commands and schedulers used to execute jobs	--	Windows UNIX	M, A
78		"CommunicateTimeout"=	Connection timeout period for the manager process of job execution control	--	Windows UNIX	M, A
79		[ {JP1_DEFAULT   logical-host-name} \JP1NBQCLIEN T\Process] #	"MacroOptionReplaceMode"=	Setting for whether to replace the passing information in a macro variable with the NULL character string	--	Windows UNIX

No.	Definition key	Environment setting parameter	Definition	Applicable manager	Applicable OS	Applicable product
80		"IsSHA" =	Definition for cluster environment setup for the commands and schedulers used to execute jobs	--	Windows UNIX	M, A
81	<ul style="list-style-type: none"> <li>For scheduler service (common) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ S2 \SCHEDULER \QUEUE \NOTIFY \Network] #</li> <li>For scheduler service (individual) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJ SMANAGER \scheduler-service-name \QUEUE \NOTIFY \Network] #</li> </ul>	"ConnectTimeout" =	Definition of the TCP/IP connection timeout value in the status reporting process for job execution control	--	Windows UNIX	M
82	<ul style="list-style-type: none"> <li>For the compatible ISAM configuration: [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1NB QNOTIFY \Network] #</li> </ul>	"CommunicateRetryCount" =	Definition of the number TCP/IP connection error retries in the status reporting process for job execution control	--	Windows UNIX	M
83		"CommunicateRetryInterval" =	Definition of the TCP/IP connection error retry interval in the status reporting process for job execution control	--	Windows UNIX	M
84	[ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1NBQNOTIFY \Process] #	"IsSHA" =	Definition for cluster environment setup for the status reporting process for job execution control	--	Windows UNIX	M

Legend:

C: Job execution control manager for submitted jobs and the compatible ISAM

## 2. Environment Setting Parameters

configuration

S: Job execution control manager for scheduler services

M: JP1/AJS3 - Manager

A: JP1/AJS3 - Agent

--: Not applicable

#

Specify JP1\_DEFAULT for the physical host. For *logical-host-name*, specify the name of a logical host.

The following explains each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

### **(1) "WorkPath"="name-of-work-directory-used-when-manager-process-is-running"**

The name of the work directory used when the manager process is running. Use this parameter to specify the name of the work directory used to manage job execution. Specify a full path name.

If there is not enough space on the disk that contains the default directory, specify a directory on a disk that has enough space.

Specifiable values

A character string of no more than 180 bytes

Default value

- In Windows Server 2008:

%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\tmp  
(The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)

- In Windows Server 2003:

*JP1/AJS3-Manager-installation-folder*\tmp

- In UNIX:

*/var/opt/jp1ajs2/tmp*

Recommended value

Default value



When the setting takes effect

After JP1/AJS3 is restarted

**(2) "IsHA"=dword:definition-for-cluster-environment-setup-for-the-manager-process**

Use this parameter to specify the definition for setting up a cluster environment for the job execution control manager process. Specify this parameter only to stop cluster use.

Specifiable values

0

Specifies to stop cluster use.

1

Specifies cluster use. Setting up cluster system operation automatically sets this value.

Default value

dword:00000000 (0 in decimal)

Recommended value

None

When the setting takes effect

After JP1/AJS3 is restarted

**(3) "DatabasePath"="name-of-the-directory-used-to-store-the-database"**

Use this parameter to specify the name of the directory used to store the ISAM file, which is the file to which job execution environment information or job information is written. Specify a full path name.

If there is not enough space on the disk that contains the default directory, specify a directory on a disk that has enough space.

Specifiable values

A character string of no more than 180 bytes

Default value

- In Windows Server 2008:

%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\database\queue (The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)

- In Windows Server 2003:

## 2. Environment Setting Parameters

*JP1/AJS3-Manager-installation-folder\database\queue*

- In UNIX:

*/var/opt/jp1ajs2/database/queue*

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

- In UNIX:

Do not create a symbolic link for a file created in the directory specified in this parameter. Reorganization will break the link because the file is re-created. If you want to create a symbolic link, use the directory specified in this parameter instead.

Do not use NFS or a network drive as the directory to be specified here.

### **(4) "PreserveTerm"=dword:number-of-days-job-information-retained**

Use this parameter to specify the number of days that job execution results are retained.

Change this value as necessary if the number of executed jobs will exceed 20,000 before the specified number of retention days (recommended value) expires.

The settings for this parameter are not applied to event jobs.

Specifiable values

A hexadecimal value (in days) from 0 to 3E7 (0 to 999 in decimal)

If you specify `dword:00000000` (zero days), the execution result information is deleted when execution of the job is complete.

For details about the setting of the retention period for job information when the specified value is 0, see *7.1.9 Setting the retention period for job information in the Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Default value

`dword:00000007` (7 days)

During a new installation and setup of JP1/AJS3, `dword:00000001` is set.

Recommended value

`dword:00000001` (one day)

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The number of days that job information is retained is the number of days that job information saved in the job execution environment database is retained. If you decrease the number of retention days, there is no effect on the number of saved generations of a jobnet that are managed by the scheduler database.

After you reduce the number of retention days, if a large amount of job information is to be deleted at the next standard time for deleting job information or at JP1/AJS3 service restart, this process might conflict with the job information deletion processing. In such a case, the job execution performance might degrade, or the system load might increase.

Be careful when changing this parameter, such as changing the value if fewer jobs are being executed or gradually reducing the number of retention days for job information.

**(5) "StandardTime"=dword:standard-time-at-which-job-information-deleted**

Use this parameter to specify the time at which job execution result information is to be deleted. Note, however, that the job execution result information is also deleted when the JP1/AJS3 service starts. In this case, the system uses the JP1/AJS3 service start time as the base time to delete all job execution result information that is older than the number of days specified for retaining the information. Thereafter, the system deletes the job execution result information at the time specified in this parameter.

If job execution performance degrades because many jobs are executed while job information is being deleted, change the base time to at time when fewer jobs are being executed.

You can also specify settings so that job information is not deleted when the JP1/AJS3 service is started. For details, see *7.1.10 Setting for disabling deletion of job information when JP1/AJS3 starts* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

The setting for this parameter is not applied to event jobs.

Specifiable values

Using 0:00 as the base time, specify a relative time in hexadecimal from 0:00 to 23:59 (in minutes).

For example, to set 1:00, specify `dword:0000003c` (1:00 = 60 minutes).

Default value

`dword:00000000` (0:00)

## 2. Environment Setting Parameters

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

### (6) "**FlashOption**"=**dword:data-file-update-mode**

Use this parameter to specify whether to permit synchronous writing when an ISAM file is updated.

Specifiable values

0

Data is written to a disk in response to OS buffering. There is no synchronization with JP1/AJS3 processing.

Specify 0 when job execution performance is more important than the reliability of database access in the job execution environment provided by writing data to a disk with OS buffering. However, in a cluster configuration, specifying this value is not recommended because reliability degrades.

1

Synchronous writing is always performed when a file is updated. This writing mode improves reliability, but reduces performance.

Default value

dword:00000001 (synchronization mode)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

### (7) "**DeleteFlashOption**"=**dword:asynchronous-option-for-job-information-deletion**

Use this parameter to specify whether to delete job information in asynchronous mode.

For details about job information deletion processing, see *7.1.8 Option for deleting job information asynchronously* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

0

Job information is deleted in asynchronous mode.

1

Job information is deleted in synchronous mode.

Default value

dword:00000001 (1 in decimal) (synchronous mode)

During a new installation and setup of JP1/AJS3, 0 is set.

Recommended value

dword:00000000 (0 in decimal) (asynchronous mode)

When the setting takes effect

After JP1/AJS3 is restarted

**(8) "PreserveMinute"=dword:retention-period-for-job-information-when-the-number-of-days-for-retaining-job-information-is-0**

Use this parameter to specify how long you want to retain job information after a job has been executed when 0 is specified as the number of days for retaining job information.

For details about job information deletion processing, see *7.1.9 Setting the retention period for job information* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide* or *7.1.8 Option for deleting job information asynchronously* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

A hexadecimal value (in minutes) from 0000000A to 000005A0 (10 to 1,440 in decimal)

Default value

dword:0000000A (10 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(9) "StartUpDelete"=dword:option-for-suppressing-job-information-deletion-at-JP1/AJS3-service-startup**

Use this parameter to specify whether to suppress job information deletion at JP1/AJS3 service startup when 1 or more is specified as the number of days for retaining job information.

For details about job information deletion processing, see *7.1.10 Setting for disabling deletion of job information when JP1/AJS3 starts* in the *Job Management Partner 1/ Automatic Job Management System 3 System Design (Configuration) Guide* or *7.1.8 Option for deleting job information asynchronously* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

0

When the JP1/AJS3 service starts, the processing that deletes job information deletes job information whose retention period (number of days) has expired when the standard time for deleting job information arrives.

When the JP1/AJS3 service starts, job information whose retention period has expired in the period from the standard time for deleting job information to the time that the JP1/AJS3 service started is not deleted.

If job information was not deleted when the previous standard time for deleting job information arrived because the JP1/AJS3 service was not running, job information whose retention period had expired when the base time arrived might remain. If so, only the remaining job information is deleted when the JP1/AJS3 service starts.

1

When the JP1/AJS3 service starts, job information deletion processing deletes all job information whose retention period has expired at the time that the JP1/AJS3 service starts.

When the JP1/AJS3 service starts, job information is also deleted if the retention period of the job information has expired in the period from the standard time for deleting job information to the time that the JP1/AJS3 service started.

If job information was not deleted when the previous standard time for deleting job information arrived because the JP1/AJS3 service was not running, job information whose retention period had expired when the base time arrived might remain. If so, any remaining job information is also deleted when the JP1/AJS3 service starts.

2

Job information deletion processing that occurs when the JP1/AJS3 service starts is suppressed. However, if the JP1/AJS3 service is set to stop at the same time as the standard time for deleting job information, do not specify this value.

Note that if the JP1/AJS3 service is not running when the standard time for deleting job information arrived, job information whose retention period had

expired when the base time arrived will never be deleted. As a result, the disk space required by the job execution environment database increases, and this increase might prevent the JP1/AJS3 service from starting, or prevent a job from being executed.

Default value

dword:00000001 (1 in decimal)

During a new installation and setup of JP1/AJS3, 0 is set.

Recommended value

dword:00000000 (0 in decimal)

When the setting takes effect

After JP1/AJS3 is restarted

**(10) "ColdStartMode"="{clear|noclear}"**

Use this parameter to specify whether to initialize the job information of the job execution environment database when the JP1/AJS3 service is cold-started.

Specifiable values

clear

The job information of the job execution environment database is initialized when the JP1/AJS3 service is cold-started, unless there has been a scheduler service that has been set to not start automatically.

noclear

The job information of the job execution environment database is not initialized when the JP1/AJS3 service is cold-started. Specify this value when you want current operation to be consistent with that of 06-71 or earlier, which does not initialize the database.

Default value

clear

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(11) "MaximumQueue"=dword:maximum-number-of-definedable-queues**

Use this parameter to specify the maximum number of queues that can be defined.

Change this parameter as necessary if the number of queues defined for the manager

might exceed the recommended value.

Specifiable values

A hexadecimal value from 1 to 2000 (1 to 8,192 in decimal)

Default value

`dword:00000096` (150 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The maximum number of queues that can be used on one manager includes the number of default queues used on the agent. The maximum number of agents specified in the `MaximumAgent` environment setting parameter equals the maximum number of default queues. Specify a larger value in the `MaximumQueue` environment setting parameter than the value specified in the `MaximumAgent` environment setting parameter.

The following shows the relationship between the maximum number of queue definitions you specify here and the maximum number of queues that can be used on one manager:

*value-specified-for-the-MaximumQueue-environment-setting-parameter* (a value greater than the value in the `MaximumAgent` environment setting parameter) = *maximum-number-of-queues-that-can-be-used-on-one-manager*

**(12) "`MaximumContentJob`"=`dword:maximum-number-of-jobs-in-the-system`**

Use this parameter to specify the maximum number of jobs that the system can hold in its work area.

Change this value as necessary if the system has to register and execute a large number of jobs in a short period.

When you start the JP1/AJS3 service, the system allocates a job information area in memory that can accommodate information for the number of jobs specified here. Specify a value that is sufficient to cover the peak number of queuing jobs during operation.

In Windows, if all job information areas are being used (when the same number of jobs as the value specified for this parameter are queued), the submit processing fails. In addition, the value of this parameter is applied only to queuing jobs (including those whose status is *waiting for time* and *on hold*) and running jobs. The value is not applied to jobs that have ended, event jobs, and judgment jobs.



In UNIX, the setting for this parameter is not applied to event jobs.

Specifiable values

A hexadecimal value from 1 to 14000 (1 to 81,920 in decimal)

Default value

- For the job execution control manager of the scheduler service  
dword:00001770 (6,000 in decimal)
- For the job execution control manager of the submitted job and the compatible ISAM configuration  
dword:000007D0 (2,000 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(13) "AlertContentJob"=dword:number-of-warning-jobs-in-the-system**

Use this parameter to specify the threshold at which a warning message will be output according to the use status of the job information area in the work area of the system.

Change this parameter as necessary if you have changed the MaximumContentJob environment setting parameter (maximum number of jobs in the system).

In Windows, the value of this parameter is applied only to queuing jobs (including those whose status is *waiting for time* and *on hold*) and running jobs. The value is not applied to jobs that have ended, event jobs, and judgment jobs.

In UNIX, the setting for this parameter is not applied to event jobs.

Specifiable values

A hexadecimal value from 1 to 14000 (1 to 81,920 in decimal)

Default value

- For the job execution control manager of a scheduler service  
dword:000012C0 (4,800 in decimal)
- For the job execution control manager of a submitted job and the compatible ISAM configuration  
dword:00000640 (1,600 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(14) "ReceiveFileSizeStatus"=dword:behavior-when-the-received-file-size-reaches-the-upper-limit**

Use this parameter to specify the behavior when the size of a file being received reaches the upper limit.

For details, see 6.2.7 *Placing restrictions on file reception* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.7 *Placing restrictions on file reception* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

0

The upper limit for received files size is checked. If the upper limit is reached, the following message is output, but all file data is received. Even if the file size exceeds the upper limit, the job status does not change, and the job end status on the agent host is inherited.

- For a result file:  
Message KAVU4294-I
- For a transfer file:  
Message KAVU2243-I

1

The upper limit for received files size is checked. If the upper limit is reached, receive processing is canceled and the job status changes.

A result file is received until the upper limit for file size (LimitReceiveFileSize) is reached. Thereafter, data that exceeds the upper limit is discarded, and the end status changes to **Ended abnormally**. For a transfer file, no file data is received, and the end status changes to **Failed to start**. For details about the return code and end status, see 6.2.7(3) *Operation performed if the size of received files exceeds the maximum* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.7(3) *Operation performed if the size of received files exceeds the maximum* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

If the upper limit has been reached, the following message is output:

- For a result file:

Message KAVU4296-E

- For a transfer file:

Message KAVU2244-E

2

The upper limit for received file size is checked. If the upper limit is reached, receive processing is canceled, and the job status changes.

Result files are received until the upper limit for file size (`LimitReceiveFileSize`) is reached. Thereafter, data that exceeds the upper limit is discarded, and the end status changes to **Ended with warning**. However, if the job status on the agent host is **Ended abnormally**, that status is inherited. For a transfer file, the end status changes to **Failed to start**, and no file data is received. For the return code and end status, see 6.2.7(3) *Operation performed if the size of received files exceeds the maximum* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.7(3) *Operation performed if the size of received files exceeds the maximum* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

If the upper limit has been reached, the following message is output:

- For a result file:

Message KAVU4295-W

- For a transfer file:

Message KAVU2244-E

3

The upper limit for received files size is checked. If the upper limit is reached, receive processing is canceled.

Result files are received until the upper limit for file size (`LimitReceiveFileSize`) is reached. Thereafter, all file data that exceeds the upper limit is discarded. For a transfer file, all file data is discarded. The end status on the agent host is inherited as the end status for the job. For the return code and end status, see 6.2.7(3) *Operation performed if the size of received files exceeds the maximum* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.7(3) *Operation performed if the size of received files exceeds the maximum* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

If the upper limit is reached, the following message is output:

## 2. Environment Setting Parameters

- For a result file:  
Message KAVU4294-I
- For a transfer file:  
Message KAVU2243-I

This specification allows a job to end normally even if the limit is exceeded. However, because the files that are created are not complete, you must make sure beforehand that the incomplete files will not cause any problems if they are referenced and used in a succeeding job.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

### (15) "**LimitReceiveFileSize**"=dword:limit-on-file-size

Use this parameter to specify the upper limit for the size of received files.

If the size of a transfer file or a result file used when a job is executed exceeds the value estimated for operation, limit the size of files received by the manager host. We recommend that you set a limit of approximately five megabytes, depending on operational requirements.

If multiple transfer files are to be sent at one time, this setting enables the total size of the files to be checked against the limit. The value used to check a result file is the total of the sizes of the standard output file and the standard error output file.

Note that the limit might be subject to an error in a range of plus or minus several hundred bytes.

The following shows how to estimate file size (in bytes):

File count

$$\Sigma (\text{file-name-length} + \text{file-size} + (12 \times \text{file-line-count}) + 100)$$

For details, see 6.2.7 *Placing restrictions on file reception* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.7 *Placing restrictions on file reception* in the *Job Management Partner 1/*

*Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

## Specifiable values

A hexadecimal value (in bytes) from 80000 to 40000000 (524,288 to 1,073,741,824 in decimal)

## Default value

dword:00500000 (5,242,880 in decimal)

## Recommended value

Default value

## When the setting takes effect

After JP1/AJS3 is restarted

## Cautionary notes

- This setting is rounded in increments of 8000 (32,768 in decimal). For example, if you specify 80001 (524,289 in decimal), the valid value is 88000 (557,056 in decimal).
- For action jobs, if the size of the information to be output by JP1/AJS3 is less than the lowest value in the range that can be specified (524,288 bytes), no information is output. Note, however, that the size could be less if you run a job in UNIX and standard error output is output for a login script of a job execution OS user or the system.

**(16) "ReceiveFileOption"=dword:definition-for-preventing-duplicated-reception-of-the-job-result-file**

Use this parameter to specify whether to prevent duplicated reception of the job result file.

For details, see 6.2.6 *Preventing duplicated reception of job result files* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.6 *Preventing duplicated reception of job result files* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

## Specifiable values

0

Duplicated reception of the job result file is not prevented.

1

Duplicated reception of the job result file is prevented.

## Default value

## 2. Environment Setting Parameters

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

### **(17) "QueuingJobRecoveryTime"=dword:recovery-time-for-queuing-jobs-when-agent-has-failed**

Use this parameter to specify the recovery time for queuing jobs when an agent has failed.

For details, see *6.2.12 Changing the wait time for recovery when an agent has failed* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.12 Changing the wait time for recovery when an agent has failed* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in seconds) from 0000001E to 00000E10 (30 to 3,600 in decimal).

A period of no jobs being executed might occur. This is possible if the system detects a job error several tens of seconds after the error occurred because the system monitors job errors at intervals of several tens of seconds.

Default value

dword:00000258 (600 in decimal, which is 10 minutes)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

### **(18) "ExecutingJobRecoveryTime"=dword:recovery-time-for-running-jobs-when-agent-has-failed**

Use this parameter to specify the recovery time for running jobs when an agent has failed.

For details, see *6.2.12 Changing the wait time for recovery when an agent has failed* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.12 Changing the wait time for recovery when an agent has failed* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

## Specifiable values

A hexadecimal value (in seconds) from 0000001E to 00000E10 (30 to 3,600 in decimal)

## Default value

dword:00000258 (600 in decimal, which is 10 minutes)

## Recommended value

Default value

## When the setting takes effect

After JP1/AJS3 is restarted

## Cautionary note

By default, the system checks the status of running jobs a maximum of three times before it detects a job abnormality. If you specify a value that is smaller than the agent monitoring interval for this parameter, the wait time for recovery elapses before the system checks the status of running jobs. In that case, the system checks the status of running jobs a maximum of two times. The detailed calculation of the total time required to detect a failure is as follows:

$$\begin{aligned}
 & \textit{Total-time-elapsing-before-a-failure-is-detected} \\
 & (\textit{agent-monitoring-interval} \times 1) \\
 & + (\textit{communication-time} \times 2) \\
 & + \\
 & \textit{length-of-time-between-the-failure-occurrence-and-the-first-check-of-the-job-status}
 \end{aligned}$$

If you reduce the agent monitoring interval, the retry interval for TCP/IP connection errors, and the number of retries, the total time elapsing before a failure is detected decreases further.

For details about setting the agent monitoring interval, see (28)  
*"ObserveInterval"=dword:agent-monitoring-interval.*

For details about setting the retry interval and number of retries for TCP/IP connection errors, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job*

*Management System 3 Configuration Guide 1 (for UNIX).*

Polling using the agent monitoring interval is executed for each agent host. If you shorten the agent monitoring interval and increase the number of pollings, the number of times communication occurs increases in proportion to the number of agent hosts. Keep this in mind when you change the agent monitoring interval. Similar care is also required when you change the retry interval and the number of retries for TCP/IP connection errors.

**(19) "MaximumExecJobLogOption"=dword:setting-for-whether-to-output-a-message-confirming-that-the-maximum-number-of-concurrently-executable-jobs-has-been-reached**

Use this parameter to specify whether to output a message confirming that the maximum number of concurrently executable jobs has been reached.

For details, see 6.2.13 *Outputting a message that reports that the maximum number of concurrently executable jobs has been reached* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for Windows)* or 14.2.13 *Outputting a message that reports that the maximum number of concurrently executable jobs has been reached* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX)*.

Specifiable values

0

A message confirming that the maximum number of concurrently executable jobs has been reached, is not output.

1

A message confirming that the maximum number of concurrently executable jobs has been reached, is output.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(20) "MaximumExecJobLogInterval"=dword:interval-for-outputting-a-message-confirming-that-the-maximum-number-of-concurrently-executable-jobs-has-been-reached**

Use this parameter to specify the interval for outputting a message to confirming that the maximum number of concurrently executable jobs has been reached.



After the first KAVU4310-I message is output, the next KAVU4310-I message is not output for the period specified here (10 minutes by default) even though jobs remain queued. If jobs still remain queued when the specified interval has elapsed, another KAVU4310-I message is output as specified.

For details, see 6.2.13 *Outputting a message that reports that the maximum number of concurrently executable jobs has been reached* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.13 *Outputting a message that reports that the maximum number of concurrently executable jobs has been reached* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in seconds) from 0000003C to 00015180 (60 to 86,400 in decimal)

Default value

dword:00000258 (600 in decimal, which 10 minutes)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(21) "PreventChangeJobOrder"=dword:setting-for-preventing-changes-to-the-execution-order-of-submitted-jobs**

Use this parameter to specify whether to prevent changes to the execution order of submitted jobs.

For details, see 7.1.11 *Setting for preventing changes in the submit job execution order* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

0

Changes to the execution order of submitted jobs are not prevented.

1

Changes to the execution order of submitted jobs are prevented.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

Specifying 1 for the `PreventChangeJobOrder` environment setting parameter only changes the job distribution processing. In addition to this setting, you must perform the following steps to prevent changes from being made to the execution order of submitted jobs:

- Make sure that only one agent is connected to the queue to which jobs are submitted.
- Specify 1 for the maximum number of concurrently executable jobs for the agent.

Note that, because this setting controls the job execution order, job performance might be reduced by several percent.

**(22) "EnumJobSaveMemory"=dword:setting-for-reducing-memory-consumed-by-the-job-execution-control-manager-when-job-information-is-enumerated**

Use this parameter to specify whether to reduce the memory consumed by the job execution control manager when job information is enumerated.

For details, see *7.1.12 Setting to reduce memory usage by the job execution control manager (jqman) when enumerating job information* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

0

The job execution control manager consumes memory as needed for the number of enumerated job information items when job information is enumerated.

1

The memory consumed by the job control manager is reduced when job information is enumerated.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

#### Cautionary note

The following are estimates of memory consumption when job information is enumerated:

- When 0 is set

The maximum amount of memory consumed is about 100 KB per job.

- When 1 is set

The maximum amount of memory consumed is about 60 MB, regardless of the number of jobs for which information is enumerated.

#### **(23) "ExecutingJobChangeStatus"=dword:setting-for-placing-all-running-jobs-in-the-end-status-when-a-communication-error-occurs**

Use this parameter to specify whether to place all running jobs in the end status when a communication error occurs. Specify a hexadecimal value.

For details about definitions, see 6.2.20 *Placing all running jobs in an end status when a communication error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.19 *Placing all running jobs in an end status when a communication error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

#### Specifiable values

0

Specify this value to place the jobs in the end status one by one if a communication error occurs during system monitoring of running jobs by polling.

1

Specify this value to place only those jobs on the execution agent among the jobs that are being executed in the same queue in the end status if a communication error occurs during the system monitoring of running jobs by polling.

#### Default value

dword:00000000 (0 in decimal)

#### Recommended value

Default value

#### When the setting takes effect

After JP1/AJS3 is restarted

**(24) "ConnectTimeout"=dword:definition-of-the-TCP/IP-connection-timeout-value-on-the-job-execution-control-manager**

Use this parameter to specify the TCP/IP connection timeout value.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in milliseconds) from 00002710 to 000927C0 (10,000 to 600,000 in decimal)

Default value

dword:00015F90 (90,000 in decimal, which is 90 seconds)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you decrease the value for the connection timeout so that it is too small, the retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

Depending on the connection timeout specifications and the OS settings, a connection timeout might occur before the value specified in this parameter is reached.

**(25) "CommunicateRetryCount"=dword:definition-of-the-number-of-retries-for-a-TCP/IP-connection-error-for-the-job-execution-control-manager**

Use this parameter to specify the number of retries for a TCP/IP connection error.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

## Specifiable values

A hexadecimal value from 00000000 to 00000064 (0 to 100 in decimal)

## Default value

dword:00000002 (2 in decimal)

## Recommended value

Default value

## When the setting takes effect

After JP1/AJS3 is restarted

## Cautionary note

If you increase the value for number of retries too much, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(26) "CommunicateRetryInterval"=dword:definition-of-the-TCP/IP-connection-error-retry-interval-on-the-job-execution-control-manager**

Use this parameter to specify the TCP/IP connection error retry interval.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

## Specifiable values

A hexadecimal value (in seconds) from 00000001 to 0000012C (1 to 300 in decimal)

## Default value

dword:00000014 (20 in decimal)

## Recommended value

Default value

## When the setting takes effect

After JP1/AJS3 is restarted

## Cautionary note

If you decrease the retry interval to so that it is too small, the communication retry interval will be too short. As a result, unavoidable communication errors might

cause the number of TCP/IP connection errors to increase.

**(27) "MaximumAgent"=dword:maximum-number-of-definable-agents**

Use this parameter to specify the maximum number of agents that execute jobs requested by the JP1/AJS3 - Manager used to define jobs.

Change this value as necessary if the number of agents defined for the manager could exceed the recommended value.

When you start the JP1/AJS3 service, the system allocates an agent information area in memory that can accommodate the information for the number of agents specified here.

An attempt to connect to more job-execution agents than the number of agents specified here will be rejected by the system.

Specifiable values

A hexadecimal value from 1 to 400 (1 to 1,024 in decimal)

Default value

dword:00000032 (50 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(28) "ObserveInterval"=dword:agent-monitoring-interval**

Use this parameter to specify the interval for monitoring the agent on which you want to execute a job.

Change this parameter as necessary if you have adjusted the period of time for monitoring agent errors.

Specifiable values

A hexadecimal value (in seconds) from 3C to 15180 (60 to 86,400 in decimal)

Default value

dword:0000012C (300 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(29) "AutoCreate"=dword:control-flag-for-automatic-definition-of-an-agent**

Use this parameter to specify whether to enable the function that automatically defines an agent.

You can use this function only if you execute PC jobs, Unix jobs, and action jobs, other than queueless jobs, that have been defined in a jobnet, or execute submitted jobs that have been defined by using the `jpqjobserv` command. This function cannot be used for queue jobs and event jobs.

Even if the execution of a job fails, the created execution agent or agent is not lost. Also, execution agents or agents are still available even after a JP1/AJS3 restart.

- About a execution agents that is to be created

The following are attributes of an execution agent to be created:

- Name of the execution host: Same as the execution agent name
- Maximum number of concurrently executable jobs: 5 for a full 24 hours
- Job transfer restriction status: Enabled
- Description: None

You can change the attributes of a execution agent by using the `ajsagtalt` command. For details about the `ajsagtalt` command, see *ajsagtalt* in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*.

- About an agent that is to be created

The following is the attribute of an agent to be created:

- Maximum number of concurrently executable jobs: 5 for a full 24 hours

The following are the attributes of the default queue of an agent to be created:

- Maximum number of jobs: 100
- Maximum number of warnings: 80
- Queue entrance status: open
- Queue exit status: open
- Connection agent: local agent host
- Priority of the agent: 1

You can change the attributes of the agent and default queue by using the `jpgagtalt`, `jpgquealt`, `jpgqueopen`, `jpgqueclose`, `jpgagtlink`, and `jpgagtunlink` commands. For details about these commands, see 3. *Commands Used for Special Operation* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 2*.

You can customize beforehand the attributes of a execution agent or agent that will be created by using the function that automatically defines an agent from the common definition information. For details, see *6.2.3 Customizing the execution agent or agent attribute values created by the automatic agent definition function* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.3 Customizing the execution agent or agent attribute values created by the automatic agent definition function* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

If you specify this parameter, the settings apply to all the execution agent or agent attributes that are created by using the automatic agent definition function.

Specifiable values

0

No execution agents or agents are automatically defined.

1

Execution agents or agents are automatically defined.

If you specify 1, the automatic agent definition function is enabled for all the jobs that the job execution control manager for which this parameter is specified handles.

Default value

dword:00000000 (0 in decimal)

Recommended value

None

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

Use this function only if absolutely necessary, such as when an error occurs on an existing execution agent or agent (job execution environment) and you need to quickly create a substitute execution agent or agent so that a job can be executed. Under normal circumstances, you should create a execution agent or agent before executing a job. If you need to add execution agents during operation, use the `ajsagtadd` command. If you need to add agents, use the `jpgimport` or `jpgagtadd` command.

**(30) "AutoCreateExecJobs"=dword:maximum-number-of-concurrently-executable-jobs-when-an-agent-host-is-defined-automatically**

Use this parameter to specify the maximum number of concurrently executable jobs that a execution agent or agent created when the agent host is defined automatically



can execute.

The concurrency level specified in this parameter is valid for a full 24 hours. To specify the concurrency level for 30-minute intervals, use the `ajsagtalt` command to change the value. For details about the `ajsagtalt` command, see *ajsagtalt* in 2. *Commands* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 1*. If you want to specify the concurrency level for 30-minute intervals for agent, use the `jpgagtalt` command to change the value. For details about the `jpgagtalt` command, see *jpgagtalt* in 3. *Commands Used for Special Operation* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 2*.

Specifiable values

A hexadecimal value from 1 to 00000400 (1 to 1,024 in decimal)

Default value

`dword:00000005` (5 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(31) "AutoCreateMaxJobs"=dword:maximum-number-of-jobs-when-the-agent-host-is-defined-automatically**

Use this parameter to specify the maximum number of jobs in the default queue that is created when the agent host is defined automatically.

Specifiable values

A hexadecimal value from 1 to FFFFFFFF (1 to 4,294,967,295 in decimal)

Default value

`dword:00000064` (100 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(32) "AutoCreateWarnJobs"=dword:warning-value-for-the-number-of-jobs-when-the-agent-host-is-defined-automatically**

Use this parameter to specify a warning value for the number of jobs in the default queue that is created when the agent host is defined automatically.

Specifiable values

A hexadecimal value from 1 to FFFFFFFF (1 to 4,294,967,295 in decimal)

Default value

dword:00000050 (80 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(33) "AutoCreatePriority"=dword:agent-priority-when-the-agent-host-is-defined-automatically**

Use this parameter to specify the agent priority for the default queue that is created when the agent host is defined automatically.

Specifiable values

A hexadecimal value from 1 to 00000010 (1 to 16 in decimal)

Default value

dword:00000001 (1 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(34) "LeastRecentlyUsed"=dword:definition-of-method-for-determining-the-agent-host-to-which-jobs-are-distributed**

Use this parameter to specify the method for determining the agent host to which jobs are to be distributed.

For details, see *6.2.9 Setting the method for determining the agent host to which a job will be delivered* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.9 Setting the method for determining the agent host to which a job will be delivered* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX). If you specify a value for queuing jobs and for submitted jobs, see *7.1.7 Method of determining the agent host to which a job is distributed* in the *Job Management Partner 1/Automatic Job Management System 3 System Design (Configuration) Guide*.

Specifiable values

0

If there are multiple agent hosts that have the same priority and agent usage rate, the system determines that a job is distributed to the agent host that has the highest agent ID.

1

If there are multiple agent hosts that have the same priority and agent usage rate, the system determines that a job is distributed to the agent host that has been idle for the longest time since the job was last distributed.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(35) "MaximumResource"=dword:maximum-number-of-definable-execution-locked-resources**

Use this parameter to specify the maximum number of execution-locked resources used to suppress the concurrent execution of jobs.

When the JP1/AJS3 service is started, an area for execution-locked resource information that is equivalent to the value specified in this parameter is reserved in memory.

The value of this parameter is not applied to event jobs.

You cannot use the execution-locked resources for the jobs defined in a jobnet. You can, however, use them for submitted jobs that have been defined by using the `jpgjobsub` command.

For details about the command, see 3. *Commands Used for Special Operation* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 2*.

Change this value as necessary if the maximum number of defined execution-locked resources that can be added by executing the `jpgresadd` command is insufficient.

Specifiable values

A hexadecimal value from 1 to 2000 (1 to 8,192 in decimal)

Default value

dword:00000032 (50 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(36) "WorkPath"="name-of-the-work-directory-used-when-an-agent-process-is-running"**

The name of the work directory used when an agent process is running. Use this parameter to specify the name of the work directory to be used to execute jobs on the host. Specify a full path name.

If there is not enough space on the disk that contains the default directory, specify a directory on a disk that has enough space.

Specifiable values

A character string of no more than 180 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\tmp`

(The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData.`)

- In Windows Server 2003:

JP1/AJS3 - Manager: `JP1/AJS3-Manager-installation-folder\tmp`

JP1/AJS3 - Agent: `JP1/AJS3-Agent-installation-folder\tmp`

- In UNIX:

`/var/opt/jp1ajs2/tmp`

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(37) "IsHA"=dword:definition-for-cluster-environment-setup-for-agent-processes**

Use this parameter to specify the definition for setting up a cluster environment for a job execution control agent process. Specify this parameter only to stop cluster use.

Specifiable values

0

Specifies to stop cluster use.

1

Specifies cluster use. Setting up cluster system operation automatically sets this value.

Default value

dword:00000000 (0 in decimal)

Recommended value

None

When the setting takes effect

After JP1/AJS3 is restarted

**(38) "IsExecFindExecutable"=dword:definition-for-executing-a-job-with-a-long-file-name**

Use this parameter to specify whether to execute the execution file of a job using a long file name without conversion to a short file name.

For details, see *6.2.15 Executing a job by using a long file name* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

0

An execution file name is converted to a short file name.

1

An execution file name is not converted to a short file name. The job is executed with a long file name.

Default value

dword:00000000 (0 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

**(39) "LoadUserProfile"=dword:definition-for-whether-to-load-the-user-profile**

Use this parameter to specify whether to load the user profile information of the OS user who executes a job when a job is executed.

## 2. Environment Setting Parameters

For details, see *6.2.16 Executing a job that requires a user profile* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

### Specifiable values

0

The user profile information is not loaded.

1

The user profile information is loaded.

Also specify 1 for the `IsAccessTokenCache` environment setting parameter.

### Default value

`dword:00000000` (0 in decimal)

### Recommended value

Depends on the user environment.

### When the setting takes effect

After JP1/AJS3 is restarted

### **(40) "`IsAccessTokenCache`"=`dword:setting-for-reusing-an-access-token-when-a-job-is-executed`**

Use this parameter to specify whether to reuse an access token when a job is executed.

If you specify 1 for the `LoadUserProfile` environment setting parameter to load the user profile information, also specify 1 for this parameter.

For details, see *6.2.17 Reusing access tokens for job execution* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

### Specifiable values

0

Specify this value to acquire an access token each time a job is executed and then to release the token after the job is executed.

1

Specify this value to reuse an access token to execute a job if an access token with the same user name, domain name, and password was saved when the previous job was executed.

Acquiring an access token requires a desktop heap area. If you specify 1, all jobs share one desktop heap area, which is the one acquired when the JP1/AJS3 service is started.

When a job is executed by a user who is not the user who started the JP1/AJS3 service, a new desktop heap area is created. All jobs executed by users other than the user who started the service share that desktop heap area.

2

Specify this value to reuse an access token to execute a job if an access token with the same user name, domain name, and password was saved when the previous job was executed.

Acquiring an access token requires a desktop heap area. If you specify 2, a desktop heap area is created for each OS user who executes the job when the job is started.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(41) "DISABLE\_FS\_REDIRECTION"=dword:setting-for-disabling-file-system-redirect-when-jobs-are-executed-in-the-WOW64-environment**

Use this parameter to specify whether to disable file system redirection when jobs are executed in the WOW64 environment and **Standard** has been specified for **Exec. service**.

For details, see 6.6.2 *Disabling file system redirection when jobs are executed in a WOW64 environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

0

File system redirection is enabled when jobs are executed in the WOW64 environment.

1

File system redirection is disabled when jobs are executed in the WOW64 environment.

Default value

dword:00000000 (0 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

**(42) "ENABLE\_LONG\_EXT"=dword:setting-value**

Use this parameter to specify whether to execute a job specified for an executable file whose extension is 4 bytes or more in the application associated with the executable-file extension when **Standard** has been specified for **Exec. service**.

For details, see *6.2.18 Executing a job whose executable file name has an extension longer than three bytes* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

0

Although the executable-file extension is 4 bytes or more, the job specified for the file is executed in the application that is associated with the first three digits of the executable-file extension.

If the system cannot find the application that is associated with the first three digits of the extension, the job does not start.

1

If the executable-file extension is 4 bytes or more, the job is executed in the application that is associated with the extension.

However, if **Standard** is specified for **Exec. service**, the job is executed with a long file name when the executable file is executed with an extension of 4 bytes or more.

Default value

dword:00000000 (0 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

**(43) "IsLimitCoreSize"=dword:limit-flag-for-the-maximum-core-file-size-for-each-process**

Use this parameter to specify whether to limit the core-file size for each process of a job that is executed from JP1/AJS3.

Specifiable values



0

The core file size for each process of a job is not limited.

1

The core file size for each process of a job is limited.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(44) "LimitCoreSize"=dword:maximum-core-file-size-for-each-process**

Use this parameter to specify the maximum core-file size for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify "IsLimitCoreSize"= to limit the maximum core-file size.

Specifiable values

A hexadecimal value from 0 to 0x7FFFFFFF (0 to 2,147,483,647 in decimal)

Default value

dword:0x7FFFFFFF (2,147,483,647 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The valid range of 0 to 0x7FFFFFFF is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set of the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

**(45) "IsLimitDataSize"=dword:limit-flag-for-maximum-data-segment-size-for-each-process**

Use this parameter to specify whether to limit the data-segment size for each process of a job that is executed from JP1/AJS3.

Specifiable values

0

The data-segment size for each process of a job is not limited.

1

The data-segment size for each process of a job is limited.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(46) "LimitDataSize"=dword:maximum-data-segment-size-for-each-process**

Use this parameter to specify the maximum data-segment size for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify

"IsLimitDataSize"=dword:1 to limit the maximum data-segment size.

Specifiable values

A hexadecimal value from 0 to 0x7FFFFFFF (0 to 2,147,483,647 in decimal)

Default value

dword:0x7FFFFFFF (2,147,483,647 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The valid range of 0 to 0x7FFFFFFF is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

**(47) "IsLimitFileSize"=dword:limit-flag-for-the-maximum-permanent-file-size-for-each-process**

Use this parameter to specify whether to limit the permanent-file size for each process of a job that is executed from JP1/AJS3.

Specifiable values

0

The permanent-file size for each process of a job is not limited.

1

The permanent-file size for each process of a job is limited.

Default value

`dword:00000000` (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(48) "LimitFileSize"=dword:maximum-permanent-file-size-for-each-process**

Use this parameter to specify the maximum permanent-file size for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify "IsLimitFileSize"=dword:1 to limit the maximum permanent-file size.

Specifiable values

A hexadecimal value from 0 to `0x7FFFFFFF` (0 to 2,147,483,647 in decimal)

Default value

`dword:0x7FFFFFFF` (2,147,483,647 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The valid range of 0 to 0x7FFFFFFF is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

**(49) "IsLimitMemorySize"=dword:limit-flag-for-the-maximum-memory-size-for-each-process**

Use this parameter to specify whether to limit the memory size (total amount of physical memory and swap area) for each process of a job that is executed from JP1/AJS3.

Specifiable values

0

The memory size for each process of a job is not limited.

1

The memory size for each process of a job is limited.

Default value

`dword:00000000` (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(50) "LimitMemorySize"=dword:maximum-memory-size-for-each-process**

Use this parameter to specify the maximum memory size (total amount of physical memory and swap area) for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify

`"IsLimitMemorySize"=dword:1` to limit the maximum memory size.

Specifiable values

A hexadecimal value from 0 to 0x7FFFFFFF (0 to 2,147,483,647 in decimal)

## Default value

`dword:0x7FFFFFFF` (2,147,483,647 in decimal)

## Recommended value

Depends on the user environment.

## When the setting takes effect

After JP1/AJS3 is restarted

## Cautionary note

The valid range of 0 to `0x7FFFFFFF` is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

**(51) "IsLimitStackSize"=dword:maximum-stack-segment-size-for-each-process**

Use this parameter to specify whether to limit the stack segment size for each process of a job that is executed from JP1/AJS3.

## Specifiable values

0

The stack segment size for each process of a job is not limited.

1

The stack segment size for each process of a job is limited.

## Default value

`dword:00000000` (0 in decimal)

## Recommended value

Default value

## When the setting takes effect

After JP1/AJS3 is restarted

**(52) "LimitStackSize"=dword:maximum-stack-segment-size-for-each-process**

Use this parameter to specify the maximum stack segment size for each process of a job that is executed from JP1/AJS3.

## 2. Environment Setting Parameters

The value specified for this parameter takes effect if you specify "IsLimitStackSize"=dword:1 to limit the maximum stack-segment size.

### Specifiable values

A hexadecimal value from 0 to 0x7FFFFFFF (0 to 2,147,483,647 in decimal)

### Default value

dword:0x7FFFFFFF (2,147,483,647 in decimal)

### Recommended value

Depends on the user environment.

### When the setting takes effect

After JP1/AJS3 is restarted

### Cautionary note

The valid range of 0 to 0x7FFFFFFF is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

### **(53) "IsLimitCpuTime"=dword:limit-flag-for-the-maximum-CPU-time-for-each-process**

Use this parameter to specify whether to limit the CPU time for each process of a job that is executed from JP1/AJS3.

### Specifiable values

0

The CPU time for each process of a job is not limited.

1

The CPU time for each process of a job is limited.

### Default value

dword:00000000 (0 in decimal)

### Recommended value

Default value

### When the setting takes effect

After JP1/AJS3 is restarted

**(54) "LimitCpuTime"=dword:maximum-CPU-time-for-each-process**

Use this parameter to specify the maximum CPU time for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify "IsLimitCpuTime"=dword:1 to limit the maximum CPU time.

Specifiable values

A hexadecimal value from 0 to 0x7FFFFFFF (0 to 2,147,483,647 in decimal)

Default value

dword:0x7FFFFFFF (2,147,483,647 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The valid range of 0 to 0x7FFFFFFF is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

**(55) "IsLimitWorkSize"=dword:limit-flag-for-the-maximum-working-set-size-for-each-process**

Use this parameter to specify whether to limit the working-set size (amount of physical memory used by a process) for each process of a job that is executed from JP1/AJS3.

Specifiable values

0

The working-set size for each process of a job is not limited.

1

The working-set size for each process of a job is limited.

Default value

## 2. Environment Setting Parameters

`dword:00000000` (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you use Solaris, do not specify this flag. If you specify this flag, JP1/AJS3 might not be able to start.

### **(56) "*LimitWorkSize*"=dword:maximum-working-set-size-for-each-process**

Use this parameter to specify the maximum working-set size (amount of physical memory used by process) for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify

`"IsLimitWorkSize"=dword:1` to limit the maximum working-set size.

Specifiable values

A hexadecimal value from 0 to `0x7FFFFFFF` (0 to 2,147,483,647 in decimal)

Default value

`dword:0x7FFFFFFF` (2,147,483,647 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The valid range of 0 to `0x7FFFFFFF` is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

### **(57) "*IsLimitNoFile*"=dword:limit-flag-for-the-maximum-number-of-file-descriptors-for-each-process**

Use this parameter to specify whether to limit the number of file descriptors for each



process of a job that is executed from JP1/AJS3.

Specifiable values

0

The number of file descriptors for each file of a job is not limited.

1

The number of file descriptors for each file of a job is limited.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(58) "LimitNoFile"=dword:maximum-number-of-file-descriptors-for-each-process**

Use this parameter to specify the maximum number of file descriptors for each process of a job that is executed from JP1/AJS3.

The value specified in this parameter takes effect if you specify "IsLimitNoFile"=dword:1 to limit the maximum number of file descriptors.

Specifiable values

A hexadecimal value from 0 to 0x7FFFFFFF (0 to 2,147,483,647 in decimal)

Default value

dword:0x7FFFFFFF (2,147,483,647 in decimal)

Recommended value

Depends on the user environment.

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

The valid range of 0 to 0x7FFFFFFF is the range of values that are logically available. The actual valid range depends on the range set in the `setrlimit()` OS system call.

If you specify `dword:0x7FFFFFFF`, the upper limit set for the system is used.

If you specify a number smaller than `dword:0x7FFFFFFF`, but larger than the upper limit of the system, the upper limit of the system is used.

If the setting fails, the system outputs a message and does not change the limit.

**(59) "PipeComTimeout"=dword:pipe-communication-timeout-value-for-agents**

Use this parameter to specify the pipe communication timeout value.

For details, see *14.2.15 Changing the timeout value for pipe communication of the agent* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

A hexadecimal value (in seconds) from `0x0000012C` to `0x7FFFFFFF` (300 to 2,147,483,647 in decimal)

Default value

`dword:0000012C` (300 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you specify a large value for the pipe communication timeout period, a job failure might not be detected quickly enough.

You can specify one second as the minimum value for the pipe communication timeout period. If you specify a value less than 300 seconds, however, the possibility that pipe communication times out increases, and a job might fail to start. For this reason, the minimum specifiable value is defined as 300 seconds or more. Note, however that if you specify a value that is less than 300 seconds, no error occurs and operation will continue.

**(60) "AfterForkPipeTimeout"=dword:timeout-value-for-job-process-execution-ready-notification**

Use this parameter to specify the timeout value for job process execution ready notification.

For details, see *14.2.16 Setting the timeout value for receiving notification from the job process that execution is ready* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

A hexadecimal value (in seconds) from 0x00000384 to 0x00015180 (900 to 86,400 in decimal)

The maximum value, which is 0x00015180 (86,400 seconds in decimal), is the number of seconds in one day.

#### Default value

`dword:00000384` (900 in decimal)

#### Recommended value

Default value

#### When the setting takes effect

After JP1/AJS3 is restarted

#### Cautionary note

If you specify a large value as the timeout value for reporting that preparations for job process execution have been completed, a job failure might not be detected quickly enough.

You can specify zero seconds as the minimum timeout value for reporting that preparations for job process execution have been completed. If you specify a value less than 900 seconds, however, the possibility a timeout error occurs increases, and a job might fail to start. For this reason, the minimum specifiable value is defined as 900 seconds or more. Note, however, that if you specify a value that is less than 900 seconds, no error occurs, and operation will continue.

### **(61) "IsCacheCmdSearchPath"=*dword:flag-for-specifying-whether-to-cache-the-command-search-path-value***

Use this parameter to specify whether to cache the value of the command-search path that is to be used when a job starts.

Caching the value improves performance when a job starts because the search path is obtained quickly. Note, however, that if you change the path when the value is cached, the change does not immediately take effect. Therefore, if you change the command-search path with caching enabled, wait at least 5 minutes before starting the job.

#### Specifiable values

0

The value for the command-search path is not cached.

1

The value for the command-search path is cached.

If you specify any value other than 0 or 1, the specified value is changed to 1.

## 2. Environment Setting Parameters

If you often change the value for the `PATH` environment variable of the execution OS user, and want the change applied immediately when a job is executed, change this parameter value to 0. Note, however, that specifying 0 degrades job execution performance.

If you want operation to be consistent with that of version 06-71 or earlier, specify `dword:00000000`.

### Default value

`dword:00000001` (1 in decimal)

### Recommended value

Default value

### When the setting takes effect

After JP1/AJS3 is restarted

### Supplementary note

The command-search path is a `PATH` environment variable set in the login script of the execution OS user.

## **(62) *"IsUseWorkPath"=dword:flag-for-specifying-whether-to-change-the-work-path-for-job-execution***

Use this parameter to specify whether to change the work path when a job is executed to the work directory of the JP1/AJS3 agent process.

### Specifiable values

0

The work path when a job is executed is not changed to the work directory used when the process is executed (the setting is disabled).

1

The work path when a job is executed is changed to the work directory used when the agent process is executed.

### Default value

`dword:00000000` (0 in decimal)

### Recommended value

Default value

### When the setting takes effect

After JP1/AJS3 is restarted

### Supplementary note

For jobs executed in UNIX, if you do not specify a work path name (-w option for the `jpqjobsub` command), the home directory of the executing user is assumed. If the home directory is not defined, root (/) is assumed.

For job execution, the system creates a file whose name starts with `JPQ_EXEC` in the work path as a temporary file. No other files are created. If you have omitted the work path specification and the job ends abnormally, this file remains in the home directory of the job executing user. To prevent this file from remaining in the home directory of the job executing user, you must change the work path to the work directory of the JP1/AJS3 agent process.

**(63) "IsSigchldDefault"=dword:definition-for-changing-setting-of-child-processes-started-by-JP1/AJS3-to-the-SIG\_DFL-setting-whereby-the-SIGCHLD-signal-is-received**

Use this parameter to specify whether to execute jobs with the default setting (`SIG_DFL`), whereby the `SIGCHLD` signal is received.

For details, see *14.2.17 Applying SIG\_DFL (setting for receiving the SIGCHLD signal) to a child process started from JP1/AJS3 in the Job Management Partner 1/ Automatic Job Management System 3 Configuration Guide 1.*

Specifiable values

0

Specify this value to execute the job with the setting (`SIG_IGN`) whereby the `SIGCHLD` signal is ignored.

1

Specify this value to execute the job with the setting (`SIG_DFL`) whereby the `SIGCHLD` signal is received.

Default value

dword:00000000 (0 in decimal)

During a new installation and setup of JP1/AJS3, 1 is set.

Recommended value

dword:00000001 (1 in decimal)

When the setting takes effect

After JP1/AJS3 is restarted

**(64) "FileAccessPermissionMode"=dword:setting-for-the-method-of-checking-the-file-access-permission-at-UNIX-job-execution**

Use this parameter to specify the method used to check the access permission of the following files when Unix jobs are executed:

## 2. Environment Setting Parameters

- Script file
- Environment variable file
- Standard input file
- Standard output file
- Standard error output file
- Destination file

For details, see *14.2.18 Enabling the file access permission check for the ACL and secondary group settings during job execution* in the *Job Management Partner 1/ Automatic Job Management System 3 Configuration Guide 1*.

### Specifiable values

0

The access permission of each file is checked according to the file permission setting. The check is not performed according to the access control list or the secondary group settings.

1

The access permission of the script file is checked according to the file permission, access control list, and secondary group settings.

For the access permissions of files other than the script file, only the check according to the file permission is performed.

2

The access permission of each file is checked according to the file permission, access control list, and secondary group settings.

### Default value

`dword:00000000` (0 in decimal)

### Recommended value

Default value

### When the setting takes effect

After JP1/AJS3 is restarted

### Cautionary note

If you change the parameter value to 1 or 2, a job that can start by default even if the access control list or secondary group for this job is set might fail to start. Before you specify a setting, consider the difference between the setting that uses only the file permission and the settings that also use the access control list or

secondary group settings to prevent any effect on the starting of a job.

**(65) "NotfyJobStateInterval"=dword:interval-for-resending-the-job-result-file**

Use this parameter to specify the interval for resending the job result file.

For details, see 6.2.5 *Changing the interval and number of resend attempts for job result files* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.5 *Changing the interval and number of resend attempts for job result files* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in seconds) from 0 to 0x00015180 (0 to 86,400 in decimal).

The maximum value is 0x00015180 (86,400 seconds in decimal), which is the number of seconds in one day.

If you do not want to resend the result file, specify 0.

Default value

dword:0000012C (300 in decimal, which means 5 minutes)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you specify 0 for this parameter, the result file is not resent. Therefore, job completion will not be reported if transfer of the result file fails, and the state of job completion will be detected by job status monitoring on the manager host. Because monitoring of the job status is usually performed by polling at five-minutes intervals, detection of job end could be delayed.

In either of the following cases, the end information for a job on the agent host is deleted. As a result, the job will be killed, and the KAVU4597-W message (A missed job at the agent (*agent-host-name*) was forcibly terminated.) will be output to the integrated trace log on the manager host.

- When the resend operation is repeated until the upper limit of `NotfyJobStateCount` is reached, at which time transfer of the result file fails
- When the agent host's JP1/AJS3 service stops before the manager host starts checking the job status

**(66) "NotifyJobStateCount"=dword:number-of-times-job-result-file-to-be-resent**

Use this parameter to specify the number of times that the job result file is to be resent.

For details, see *6.2.5 Changing the interval and number of resend attempts for job result files* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.5 Changing the interval and number of resend attempts for job result files* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value from 1 to 0x00000800 (1 to 2,048 in decimal)

Default value

dword:00000120 (288 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Supplementary note

If you use the default values of this parameter and the `NotifyJobStateInterval` environment setting parameter, a resend operation is performed at five-minute intervals for 24 hours.

**(67) "ConnectTimeout"=dword:definition-of-the-TCP/IP-connection-timeout-value-of-the-job-execution-control-agent**

Use this parameter to specify the TCP/IP connection timeout value.

For details about the definition, see *6.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in milliseconds) from 00002710 to 000927C0 (10,000 to 600,000 in decimal)

Default value

dword:00015F90 (90,000 in decimal, which is 90 seconds)

Recommended value



Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you decrease the value for the connection timeout so that it is too small, the connection retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

Depending on the connection timeout specifications and the settings, a connection timeout might occur before the value specified for `ConnectTimeout` is reached.

**(68) "CommunicateRetryCount"=dword:definition-of-the-number-of-retries-for-a-TCP/IP-connection-error-on-the-job-execution-control-agent**

Use this parameter to specify the number of retries for a TCP/IP connection error.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value from 00000000 to 00000064 (0 to 100 in decimal)

Default value

dword:00000002 (2 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you increase the value for number of retries too much, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(69) "CommunicateRetryInterval"=dword:definition-of-the-TCP/IP-connection-error-retry-interval-on-the-job-execution-control-agent**

Use this parameter to specify the TCP/IP connection error retry interval.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in seconds) from 00000001 to 0000012C (1 to 300 in decimal)

Default value

dword:00000014 (20 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you decrease the value for the retry interval so that it is too small, the communication retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(70) "LogonUserRetryCount"=dword:number-of-retries-for-obtaining-an-access-token-when-"Standard"-is-specified-for-"Exc.service"**

Use this parameter to specify the number of retries for obtaining an access token when **Standard** is specified for **Exec. service**.

For details, see 6.2.19 *Changing the settings for logon retries when a job is executed* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

A hexadecimal value from 00000000 to 00000064 (0 to 100 in decimal)

Default value

dword:00000003 (3 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you specify 0, no retry attempts are made.

**(71) "LogonUserRetryInterval"=dword:retry-interval-for-obtaining-an-access-to-ken-when-"Standard"-is-specified-for-"Exec.service"**

Use this parameter to specify the retry interval for obtaining the access token when **Standard** is specified for **Exec. service**.

For details, see 6.2.19 *Changing the settings for logon retries when a job is executed* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

A hexadecimal value (in seconds) from 00000001 to 0000012C (0 to 300 in decimal)

Default value

dword:00000001 (1 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(72) "variable-name"="value"**

*variable-name*

Specify the character string for the variable name in the format *\$variable-name\$*. The specified variable name here can be used in the file path names and parameters.

*value*

Specify the installation path for the execution program indicated by *variable-name* on each applicable host.

Cautionary note

If you define environment setting parameters incorrectly, you can perform the recovery procedure described in *E. Recovery Procedure Used When An Incorrect Environment Settings Parameter Is Set* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

For details, see 6.2.1 *Defining variables for work paths used during job execution* in the *Job Management Partner 1/Automatic Job Management System 3*

*Configuration Guide 1* (for Windows) or *14.2.1 Defining variables for work paths used during job execution* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

**(73) "All Users"=search-path-for-a-transfer-file**

Specify the search path name for all JP1 users.

Supplementary note

You can specify a search path name for each JP1 user separately, and a search path name for all JP1 users in any sequence.

When you write multiple search path names in Windows, use two colons (: :) to delimit them. Also enclose the entire path name after the equal sign (=) in double quotation marks (").

If the specifications are duplicated, the priority is as follows:

- The specification for a JP1 user has priority over the specification for all JP1 users. If a transfer file with a search path that was specified for a JP1 user is found, a search using the search path specified for all JP1 users is not performed.
- If a JP1 user name is duplicated, the most recent specification has priority.

For details, see *6.2.2 Defining search paths for a file to be transferred* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.2 Defining search paths for a file to be transferred* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

**(74) "JP1-user-name"=search-path-for-a-transfer-file**

Specify the search path name for each JP1 user who executes a job.

Supplementary note

You can specify a search path name for each JP1 user separately, and a search path name for all JP1 users in any sequence.

When you write multiple search path names in Windows, use two colons (: :) to delimit them. Also enclose the entire path name after the equal sign (=) in double quotation marks (").

If specifications are duplicated, the priority is as follows:

- The specification for a JP1 user has priority over the specification for all JP1 users. If a transfer file with a search path that was specified for a JP1 user is found, a search using the search path specified for all JP1 users is not performed.
- If a JP1 user name is duplicated, the most recent specification has priority.

For details, see 6.2.2 *Defining search paths for a file to be transferred* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.2 *Defining search paths for a file to be transferred* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

**(75) "ConnectTimeout"=dword:definition-of-the-TCP/IP-connection-timeout-value-for-job-execution-and-schedulers-commands**

Use this parameter to specify the TCP/IP connection timeout value.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in milliseconds) from 00002710 to 000927C0 (10,000 to 600,000 in decimal)

Default value

dword:00015F90 (90,000 in decimal, which is 90 seconds)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you decrease the connection timeout value so that it is too small, the retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

Depending on the connection timeout specification and the settings in the OS, a connection timeout might occur before the value specified for `ConnectTimeout` is reached.

**(76) "CommunicateRetryCount"=dword:definition-of-number-of-retries-for-an-TCP/IP-connection-error-for-job-execution-and-scheduler-commands**

Use this parameter to specify the number of retries for a TCP/IP connection error.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.8

*Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

Specifiable values

A hexadecimal value from 00000000 to 00000064 (0 to 100 in decimal)

Default value

dword:00000002 (2 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you increase the value for number of retries too much, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(77) "CommunicateRetryInterval"=dword:definition-of-the-TCP/IP-connection-error-retry-interval-for-job-execution-and-scheduler-commands**

Use this parameter to specify the TCP/IP connection error retry interval.

For details about the definition, see *6.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for Windows)* or *14.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

Specifiable values

A hexadecimal value (in seconds) from 00000001 to 0000012C (1 to 300 in decimal)

Default value

dword:00000014 (20 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

## Cautionary note

If you decrease the value for the retry interval to so that it is too small, the communication retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(78) "CommunicateTimeout"=dword:setting-value**

Use this parameter to specify the communication timeout period.

For details, see 6.2.14 *Changing the timeout value for the job execution control manager process* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.14 *Changing the timeout value for the job execution control manager process* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

## Specifiable values

A hexadecimal value (in milliseconds) from 000927c0 to 0036EE80 (600,000 to 3,600,000 in decimal)

## Default value

dword:000927c0 (600,000 in decimal, which is 10 minutes)

## Recommended value

Default value

## When the setting takes effect

After JP1/AJS3 is restarted

**(79) "MacroOptionReplaceMode"=dword:whether-to-replace-the-passing-information-in-a-macro-variable-with-a-NULL-character-string**

When the passing information in a macro variable that has no characters before and after it is a NULL character string, use this parameter to specify whether to replace the macro variable name with a NULL character string.

For details, see 6.2.11 *Setting the handling of a macro variable when the value is a NULL string* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or 14.2.11 *Setting the handling of a macro variable when the value is a NULL string* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

## Specifiable values

0

The specified macro variable name is used as is as a character string. There is no replacement with a NULL string.

## 2. Environment Setting Parameters

1

The macro variable name is replaced with a NULL string.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

### **(80) "IsHA"=dword:definition-for-the-cluster-environment-setup-for-the-commands-and-schedulers-used-for-job-execution**

Use this parameter to specify the definition for setting up a cluster environment for the commands and schedulers used for job execution. Specify this parameter only to stop cluster use.

Specifiable values

0

Specifies to stop cluster use.

1

Specifies cluster use. Setting up cluster system operation automatically sets this value.

Default value

dword:00000000 (0 in decimal)

Recommended value

None

When the setting takes effect

After JP1/AJS3 is restarted

### **(81) "ConnectTimeout"=dword:definition-of-the-TCP/IP-connection-timeout-value-in-the-status-reporting-process-for-the-job-execution-control**

Use this parameter to specify the TCP/IP connection timeout value.

For details about the definition, see *6.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/ Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error*



*occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

Specifiable values

A hexadecimal value (in milliseconds) from 00002710 to 000927C0 (10,000 to 600,000 in decimal)

Default value

dword:00015F90 (90,000 in decimal, which is 90 seconds)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you decrease the connection timeout value to so that it is too small, the retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

Depending on the connection timeout specification and the OS settings, a connection timeout might occur before the value specified for `ConnectTimeout` is reached.

**(82) "CommunicateRetryCount"=dword:definition-of-the-number-of-retries-for-a-TCP/IP-connection-error-in-the-status-reporting-process-for-job-execution-control**

Use this parameter to specify the number of retries for a TCP/IP connection error.

For details about the definition, see 6.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for Windows)* or 14.2.8 *Changing the interval and number of retry attempts when a TCP/IP connection error occurs in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

Specifiable values

A hexadecimal value from 00000000 to 00000064 (0 to 100 in decimal)

Default value

dword:00000002 (2 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you increase the value for number of retries too much, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(83) "CommunicateRetryInterval"=dword:definition-of-the-TCP/IP-connection-error-retry-interval-in-the-status-reporting-process-for-job-execution-control**

Use this parameter to specify the TCP/IP connection error retry interval.

For details about the definition, see *6.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.8 Changing the interval and number of retry attempts when a TCP/IP connection error occurs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in seconds) from 00000001 to 0000012C (1 to 300 in decimal)

Default value

dword:00000014 (20 in decimal)

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

Cautionary note

If you decrease the value for the retry interval so that it is too small, the communication retry interval will be too short. As a result, unavoidable communication errors might cause the number of TCP/IP connection errors to increase.

**(84) "IsSHA"=dword:definition-for-cluster-environment-setup-for-the-status-reporting-process-for-job-execution-control**

Use this parameter to specify the definition for setting up a cluster environment for the status reporting process for job execution control. Specify this parameter only to stop cluster use.

Specifiable values

0

Specifies to stop cluster use.

1

Specifies cluster use. Setting up cluster system operation automatically sets this values.

Default value

dword:00000000 (0 in decimal)

Recommended value

None

When the setting takes effect

After JP1/AJS3 is restarted

## 2.4 Setting up the event/action control environment

The environment for starting event jobs requires different settings in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

The table below lists the environment setting parameters to be used to set event/action control in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column. To determine whether an environment setting parameter is to be set in the manager environment (JP1/AJS3 - Manager) or the agent environment (JP1/AJS3 - Agent), see the *Applicable product* column.

Table 2-4: Environment setting parameters (event action control)

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[{JP1_DEFAULT logical-host-name}\JP1AOMMANAGER] #1	"WaitInfFileOutDir"=	Name of the directory to which the wait information file (settings for the manager process) is output	Windows UNIX	M
2	[JP1_DEFAULT\JP1AOMMANAGER] #2	"_AgentStartStopResolveMode"=	Name resolution option for an agent host	Windows UNIX	M
3	<ul style="list-style-type: none"> <li>For scheduler service (common)</li> </ul>	"FileWriteMode"=	File update mode	Windows UNIX	M
4	<ul style="list-style-type: none"> <li>[{JP1_DEFAULT logical-host-name}\JP1AJS2\SCHEMULER\EV\MANAGER] #1</li> <li>For the compatible ISAM configuration</li> </ul>	"MacVarDQuotation"=	Option for enabling double quotation marks (") in passing information	Windows UNIX	M
5	[{JP1_DEFAULT logical-host-name}\JP1AOMMANAGER] #1	"DNSEstablish"=	Definition for running JP1/AJS3 in FQDN format for DNS operation that uses event jobs	Windows UNIX	M
6		"FixedHostnameForAgent"=	Option for ensuring that a fixed manager host name is used	Windows UNIX	M

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
7	<ul style="list-style-type: none"> <li>For scheduler service (common) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJS2\SCHEDULER\EV\MANAGER] #1</li> </ul>	"EvJobExecContinue"=	Option to continue execution of active event jobs	Windows UNIX	M
8	<ul style="list-style-type: none"> <li>For scheduler service (individual) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJS2\SCHEDULER\EV\MANAGER] #1</li> </ul>	"BlockadeTimeoutInterval"=	Period of time for monitoring an event job in the blocked status	Windows UNIX	M
9	<ul style="list-style-type: none"> <li>For the compatible ISAM configuration [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJS2\SCHEDULER\EV\MANAGER] #1</li> </ul>	"NotificationConstantRetry"=	Option for ensuring that the sending of unreported information is retried at regular intervals	Windows UNIX	M
10	<ul style="list-style-type: none"> <li>For the compatible ISAM configuration [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJS2\SCHEDULER\EV\MANAGER] #1</li> </ul>	"NotificationRetryInterval"=	Interval for sending unreported information	Windows UNIX	M
11	<ul style="list-style-type: none"> <li>For the compatible ISAM configuration [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJS2\SCHEDULER\EV\MANAGER] #1</li> </ul>	"NotificationRetryCount"=	Maximum number of retries for sending unreported information	Windows UNIX	M
12	<ul style="list-style-type: none"> <li>For scheduler service (common) [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AJS2\SCHEDULER\EV\MANAGER] #1</li> <li>For the event/action control agent [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AOMAGENT] #1</li> <li>For the compatible ISAM configuration [ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AOMMANAGER] #1</li> </ul>	"ClientBindFlag"=	Behavior of the send binding method	Windows UNIX	M, A
13	[ {JP1_DEFAULT   <i>logical-host-name</i> } \JP1AOMAGENT] #1	"WaitInfFileOutDir"=	Name of the directory to which the wait information file (settings for the agent process) is output	Windows UNIX	M, A

2. Environment Setting Parameters

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
14		"EvjobInfFile"=	Name of directory in which inherited event job information is saved	Windows UNIX	M, A
15		"HowUseInfWhenHA"=	Information inheritance when a failover occurs	Windows UNIX	M, A
16		"InformationWhenShutdown"=	How information is inherited at system shutdown	Windows UNIX	M, A
17		"FilewatchinfContinue"=	How information of the file monitoring job is inherited	Windows UNIX	M, A
18		"FileWriteMode"=	File update mode	Windows UNIX	M, A
19		"EVProcessHA"=	Option used when a detail process terminates	Windows UNIX	M, A
20		"EventSequential"=	Event order option	Windows UNIX	M, A
21		"RetryAgtStartNotification"=	Definition for resending the startup notification if sending of a startup notification has failed	Windows UNIX	M, A
22		"ClientConnectTimeout"=	Time out value for the connection between the event/action control manager and the event/action control agent for communication	Windows UNIX	M, A
23		"NotificationRetryInterval"=	Interval for sending unreported information	Windows UNIX	M, A
24		"NotificationRetryCount"=	Maximum number of retries for sending unreported information	Windows UNIX	M, A

No	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
25	[JP1_DEFAULT\JP1AOMAGEN T] #2	"RecvTimeout" =	Whether to set a timeout for receiving data in event job socket communication	Windows UNIX	M, A

Legend:

M: JP1/AJS3 - Manager

A: JP1/AJS3 - Agent

#1

Specify JP1\_DEFAULT for the physical host. For *logical-host-name*, specify the name of a logical host.

#2

The setting of this parameter is valid for the physical and all logical hosts.

The following describes each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

**(1) "WaitInfFileOutDir"="name-of-directory-to-which-the-wait-information-file-is-output" (setting for the manager process)**

Use this parameter to specify the name of the directory to which detailed information about event jobs and information about the receive status of events monitored by the start condition (wait information) is output. Specify a full path name.

Note that you need to specify this directory only if you want to change the default directory.

Specify this parameter if you want to output the wait information to a folder that is not specified by default or to support a cluster configuration.

The wait information is output to the directory you specify in this parameter or to the following folder in the assumed directory.

- In Windows:

## 2. Environment Setting Parameters

sys\infodir

- In UNIX:

sys/infodir

This parameter is valid only for a manager process in an ISAM configuration, which ensures compatibility, or for a manager process started from host-service management in a standard configuration.

### Specifiable values

A character string of no more than 180 bytes

### Default value

- In Windows:

*JP1/AJS3-Manager-installation-folder*

- In UNIX:

*/var/opt/jp1ajs2*

### Recommended value

- For a physical host:

Blank

- For a logical host:

*directory-name-of-a-common-disk*

### When the setting takes effect

The next time the JP1/AJS3 service is started

## (2) "***\_AgentStartStopResolveMode***"="{***optimized|normal***}"

Use this parameter to specify whether to optimize the name resolution processing of an agent host.

This parameter is valid only for the compatible ISAM configuration.

### Specifiable values

optimized

Specify this value to optimize the name resolution processing of an agent host name.

Only the name of the agent host that runs event jobs or jobnets with start conditions is resolved.

normal



Specify this value if you do not want to optimize name resolution processing of the agent host name.

Default value

normal

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(3) "FileWriteMode"="{sync|nosync}" (setting for the manager process)**

Use this parameter to specify whether to perform synchronous writing when the wait information file is updated.

Select the writing method appropriate for performance, reliability, and method of operation.

Specifiable values

sync

Synchronous writing is always performed when a file is updated. This writing mode improves reliability, but reduces performance.

Select this method when reliability is more important, as in a cluster environment.

nosync

Data is written to a disk in response to OS buffering. There is no synchronization with JP1/AJS3 processing. This mode provides better performance than `sync`, but a system failure will lead to inconsistent information, sometimes causing an event to disappear.

Default value

nosync

Recommended value

- For a physical host:  
nosync (asynchronous)
- For cluster use:  
sync (synchronous)

When the setting takes effect

The next time the JP1/AJS3 service is started

Cautionary note

Specify the same parameter value in the manager process (definition key JP1AJSMANAGER\SCHEDULER\EV\MANAGER) and the agent process (definition key JP1AOMAGENT). If you specify `nosync` for the manager process and `sync` for agent process, JP1/AJS3 slows down dramatically. This could happen if a jobnet using an event job or a jobnet with a start condition is registered for execution or is killed, or if an OR job preceded by many event jobs is executed. For the same reason, specify the same setting for the manager and the agents in the manager-agent system.

**(4) "MacVarDQuotation"="{Y|N}"**

Use this parameter to specify whether to use the option for enabling double quotation marks (") in passing information.

Specifiable values

Y

The option is used.

N

The option is not used.

Default value

N

During a new installation and setup of JP1/AJS3, Y is set.

Recommended value

Y

When the setting takes effect

The next time the JP1/AJS3 service is started

**(5) "DNSEstablish"="{Y|N}"**

Use this parameter to specify whether to use an FQDN host name when DNS is used.

Specifiable values

Y

An FQDN host name is used when DNS is used.

N

An FQDN host name is not used when DNS is used. The manager sends a host name to agents instead of an FQDN host name.

Default value

N

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service is started

**(6) "FixedHostnameForAgent"="{Y|N}"**

Use this parameter to specify whether lower case is always used for alphabetic characters in the manager host name for communication between event/action control processes.

For details, in Windows, see *6.3.16 Settings for ensuring that a fixed manager host name is used when event jobs are executed in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*. In UNIX, see *14.3.17 Settings for ensuring that a fixed manager host name is used when event jobs are executed in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

Y

The host name obtained on the manager host is used for communication for event/action control after case conversion is performed so that all letters are lower case.

N

The host name obtained on the manager host is used for communication for event/action control without case conversion.

Default value

N

Recommended value

Y

When the setting takes effect

The next time the JP1/AJS3 service starts

**(7) "EvJobExecContinue"="{Y|N}"**

Use this parameter to specify whether to continue execution of an event job when you restart the JP1/AJS3 service on an execution.

For details, see *6.3.6 Resuming event jobs that stopped when the JP1/AJS3 service stopped* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.3.6 Resuming event jobs that stopped when the JP1/AJS3 service stopped* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

Y

Execution of the event job is continued.

N

Execution of the event job ends.

Default value

N

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

Cautionary notes

- If the version of JP1/AJS2 - Manager is 08-50 and earlier, the option to continue execution of active event jobs cannot be used.
- Set the option to continue execution of active event jobs for each manager of a physical host and a logical host.

**(8) "*BlockadeTimeoutInterval*"=dword:time-for-monitoring-event-jobs-in-blocked-status**

Use this parameter to specify the period of time until an event job in blocked status or a jobnet with start conditions is killed.

For details, see *6.3.10 Setting the period of time for monitoring event jobs in the blocked status* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.3.10 Setting the period of time for monitoring event jobs in the blocked status* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in hours) from 00000018 to 000002D0 (24 to 720 in decimal)

Default value

dword:000002D0 (720 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(9) "NotificationConstantRetry"="{Y|N}"**

Use this parameter to specify whether to use the regular or gradually increasing retry interval if the connection for communication from the manager host to the agent host fails because of a network error caused by a timeout.

For details, see *6.3.12 Settings for ensuring that the sending of unreported information is retried at regular intervals* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.3.13 Settings for ensuring that the sending of unreported information is retried at regular intervals* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

Y

If a network error caused by a timeout occurs, sending is retried at regular intervals.

N

If a network error caused by a timeout occurs, sending is retried at gradually increasing intervals.

Default value

N

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(10) "NotificationRetryInterval"=dword:retry-interval-for-sending-unreported-information-from-the-manager-host-to-the-agent-host**

Use this parameter to specify the retry interval for sending unreported information from the manager host to the agent host.

For details, see *6.3.13 Changing the send retry interval and the number of retries for sending unreported information* in the *Job Management Partner 1/Automatic Job*

*Management System 3 Configuration Guide 1 (for Windows) or 14.3.14 Changing the send retry interval and the number of retries for sending unreported information in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

Specifiable values

A hexadecimal value (in seconds) from 00000001 to 00015180 (1 to 86,400 in decimal)

Default value

`dword:0000001E` (30 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(11) "NotificationRetryCount"=dword:maximum-number-of-retries-for-sending-unreported-information-from-the-manager-host-to-the-agent-host**

Use this parameter to specify the maximum number of retries for sending unreported information from the manager host to the agent host.

For details, see *6.3.13 Changing the send retry interval and the number of retries for sending unreported information in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for Windows) or 14.3.14 Changing the send retry interval and the number of retries for sending unreported information in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1 (for UNIX).*

Specifiable values

A hexadecimal value (number of times) from 00000001 to 00015180 (1 to 86,400 in decimal)

Default value

`dword:00000B40` (2,880 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(12) "ClientBindFlag"=dword:behavior-of-the-send-binding-method**

Use this parameter to specify whether to match the send binding method used for

communication when an event job is executed to the receive binding method.

For details, see *6.3.11 Setting the binding method applied to the outgoing communication used in the execution of event jobs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.3.11 Setting the binding method applied to the outgoing communication used in the execution of event jobs* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

0

The setting for the send binding method used for communication when an event job is executed is canceled.

1

The send binding method used for communication when an event job is executed is matched to the receive binding method.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(13) "WaitInfFileOutDir"="name-of-directory-to-which-the-wait-information-file-is-output" (setting for the agent process)**

Use this parameter to specify the name of the directory to which information such as the event-generation status of the event job and receive status of events monitored by the start condition (wait information) is output. Specify a full path name. Note that you need to specify this directory only if you want to change the default directory.

Specify this parameter if you want to output the wait information to a folder that is not specified by default or to support a cluster configuration.

The wait information is output to the directory you specify here or to the following directory in the assumed directory.

- In Windows:  
sys\infoagt
- In UNIX:  
sys/infoagt

Specifiable values

A character string of no more than 180 bytes

Default value

- In Windows:  
JP1/AJS3 - Manager: *JP1/AJS3-Manager-installation-folder*  
JP1/AJS3 - Agent: *JP1/AJS3-Agent-installation-folder*
- In UNIX:  
*/var/opt/jp1ajs2*

Recommended value

- For JP1/AJS3 - Manager:  
Physical hosts: Blank  
Logical hosts: *directory-name-of-a-common-disk*
- For JP1/AJS3 - Agent:  
Blank

When the setting takes effect

The next time the JP1/AJS3 service is started

**(14) "EvjobInfFile"="name-of-directory-for-inheriting-event-or-job-information"**

Use this parameter to specify the name of the directory in which the file inheriting the information received in the email reception monitoring jobs and message-queue-reception monitoring jobs is saved. Specify a full path name. Note that you need to specify this directory only if you want to change the default directory.

Specify this parameter if you want to output the information to a folder that is not specified by default or to support a cluster configuration.

Specifiable values

A character string of no more than 180 bytes

Default value

- In Windows Server 2008:  
*%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\tmp\infodir* (The default value of *%ALLUSERSPROFILE%* is *system-drive\ProgramData*.)
- In Windows Server 2003:  
*JP1/AJS3-Manager-installation-folder\tmp\infodir*



- In UNIX:

/var/opt/jp1ajs2/sys/infoagt/tmp/infodir

Recommended value

- For JP1/AJS3 - Manager:

Physical hosts: Blank

Logical hosts: *directory-name-of-a-common-disk*

- For JP1/AJS3 - Agent:

Blank

When the setting takes effect

The next time the JP1/AJS3 service is started

Cautionary note

JP1/AJS3 does not use the file saved in this directory. Also, because the file is not automatically deleted, delete it when it is no longer needed.

### **(15) "HowUseInfWhenHA"="{Y|N}"**

Use this parameter to specify, in the case of a failover, whether information is to be inherited by the new JP1/AJS3 - Manager or JP1/AJS3 - Agent from the current JP1/AJS3 - Manager or JP1/AJS3 - Agent.

Change the parameter value to discard events generated before the failover if those events include events that could not be reported to JP1/AJS3 - Manager and the failover does not require a shutdown.

Specifiable values

Y

The status existing at failover is inherited by the new JP1/AJS3 - Manager or JP1/AJS3 - Agent. For example, after the switchover, an event that could not be reported to JP1/AJS3 - Manager before the failover occurred will be resent.

N

The status existing at failover is not inherited by the new JP1/AJS3 - Manager or JP1/AJS3 - Agent. For example, an event that could not be reported to JP1/AJS3 - Manager before the failover occurred will be discarded.

Specify Y for normal operation. Also specify Y if cluster operation is not used.

Default value

Y

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(16) "InformationWhenShutDown"="{K|B}"**

Use this parameter to specify whether to report events that could not be reported to JP1/AJS3 - Manager when either the JP1/AJS3 - Manager host or JP1/AJS3 - Agent host was shut down (end with stop processing).

Change the parameter value to discard any such unreported events at the next restart.

Specifiable values

K

When JP1/AJS3 - Manager or JP1/AJS3 - Agent is started after the previous shutdown, the system reports the events that could not be reported to JP1/AJS3 - Manager before the shutdown. For example, when you start the terminated host, events generated before shutdown are reported to JP1/AJS3 - Manager (unless their periods of validity have expired).

B

When JP1/AJS3 - Manager or JP1/AJS3 - Agent is started after the previous shutdown, the system does not report the events that could not be reported to JP1/AJS3 - Manager before the shutdown. That is any such events are discarded. Specify this value if you want information to be inherited only when a power failure occurs.

Specify K for normal operation.

Default value

K

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(17) "FilewatchinfContinue"="{Y|N}"**

Use this parameter to specify whether the information for a file-monitoring job existing at the last shutdown is inherited when JP1/AJS3 - Manager or JP1/AJS3 - Agent is shut down (end with stop processing) during execution of the file-monitoring

job.

Change the parameter value in the following case: if the shut-down file-monitoring job is defined in the start conditions and is to be restarted, you do not want the monitoring status to be inherited.

Specifiable values

Y

The JP1/AJS3 - Manager or JP1/AJS3 - Agent started after the shutdown inherits the pre-shutdown monitoring status of a file-monitoring job.

N

The JP1/AJS3 - Manager or JP1/AJS3 - Agent started after shutdown do not inherit the pre-shutdown monitoring status of a file-monitoring job.

Default value

N

During a new installation and setup of JP1/AJS3, Y is set.

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service is started

**(18) "FileWriteMode"="{sync|nosync}" (setting for agent processes)**

Use this parameter to specify whether to permit synchronous writing when the event or job information and wait information file are updated.

Select the writing method appropriate for performance, reliability, and method of operation.

Specifiable values

sync

Synchronous writing is always performed when a file is updated. This writing mode improves reliability, but reduces the performance.

Select this method when reliability is more important, as in a cluster environment.

nosync

Data is written to a disk in response to OS buffering. There is no synchronization with the JP1/AJS3 processing. This mode provides better performance than sync, but a system failure will lead to inconsistent

information, sometimes causing an event to disappear.

Default value

`nosync`

Recommended value

- For a physical host:  
`nosync` (asynchronous)
- For a cluster use:  
`sync` (synchronous)

When the setting takes effect

The next time the JP1/AJS3 service is started

Cautionary note

Specify the same parameter value in the manager process (definition key `JP1AJSMANAGER\scheduler-service-name\EV\MANAGER`) and the agent process (definition key `JP1AOMAGENT`). If you specify `nosync` for the manager process and `sync` for the agent process, JPJ/AJS3 operation slows down dramatically. This might happen if a jobnet using an event job or a jobnet with a start condition is registered for execution or is killed, or if an OR job preceded by many event jobs is executed. For the same reason, specify the same setting for the manager and the agents in the manager-agent system.

**(19) "EVProcessHA"="{Y|N}"**

When event/action control detail processes are terminated with a signal, specify whether to operate at a reduced level without terminating the event/action control agent process, or whether to terminate the processing after stopping all detail processes.

Specifiable values

Y

All the detail processes are stopped, after which the event/action control agent process terminates.

N

Operation continues at a reduced level. The event/action control agent process is not terminated. If some of the detail processes are terminated for a reason such as a signal, you will be able to use only the remaining event jobs that are not affected by those detail processes that have been terminated.

Default value

- For JP1/AJS3 - Manager:  
If you omit this parameter, Y is assumed.
- For JP1/AJS3 - Agent:  
If you omit this parameter, N is assumed.

During a new installation and setup of JP1/AJS3, Y is set.

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service is started

Cautionary notes

- If you specify Y for the parameter value and then set restarting of the abnormally terminated JP1/AJS3 processes, the agent and detail processes are restarted when the JP1/AJS3 process is restarted. For details about how to restart the abnormally terminated JP1/AJS3 processes, see *7.3.1 Restarting an abnormally terminated JP1/AJS3 process* in the *Job Management Partner 1/Automatic Job Management System 3 Administration Guide*.
- In UNIX, if you specify N for the parameter value and disable the detail process termination option, registering for execution a job related to an abnormally terminated detail process<sup>#</sup> causes the job to terminate abnormally.  
  
#: For example, run the file-monitoring job when the `jpocwtf1Main` process has terminated abnormally.

**(20) "EventSequential"="{Y|N}"**

Use this parameter to specify whether to use the event order option.

Specifiable values

Y

Specify this value to use the event order option.

N

Specify this value if you do not use the event order option.

Default value

N

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(21) "RetryAgtStartNotification"="{Y|N}"**

Use this parameter to specify whether to resend the startup notification if sending the startup notification has failed.

Specifiable values

Y

The startup notification is resent.

N

The startup notification is not resent.

Default value

N

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

**(22) "ClientConnectTimeout"=dword:connection-timeout-for-communication-between-the-event/action-control-manager-and-the-event/action-control-agent**

Use this parameter to specify how long to wait for a connection if a connection request for a TCP/IP socket does not immediately result in either success or failure.

If the connection request is not completed within the specified time, the request is canceled as a timeout.

For details about setting this environment setting parameter in the manager environment, see 2.6(1) *ClientConnectTimeout*.

Specifiable values

A hexadecimal value (in milliseconds) from 000003E8 to 000927C0 (1,000 to 600,000 in decimal)

Default value

- In Windows:  
dword:00007530 (30,000 in decimal)
- In UNIX:

dword:000003E8 (1,000 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

The next time the JP1/AJS3 service starts

Cautionary notes

- If the TCP/IP connection timeout value set in the OS is less than the value set in this environment setting parameter, the timeout value set in the OS overrides the value of the environment setting parameter.
- If this environment setting parameter is omitted, the default value is used.
- If a value that cannot be specified for event/action control is specified in this parameter, the default value is used.

**(23) "NotificationRetryInterval"=dword:retry-interval-for-sending-unreported-information-from-the-agent-host-to-the-manager-host**

Use this parameter to specify the retry interval for sending unreported information from the agent host to the manager host.

For details, see *6.3.13 Changing the send retry interval and the number of retries for sending unreported information* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.3.14 Changing the send retry interval and the number of retries for sending unreported information* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (in seconds) from 00000001 to 00015180 (1 to 86,400 in decimal)

Default value

dword:0000000A (10 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(24) "NotificationRetryCount"=dword:maximum-number-of-retries-for-sending-unreported-information-from-the-agent-host-to-the-manager-host**

Use this parameter to specify the maximum number of retries for sending unreported

information from the agent host to the manager host.

For details, see *6.3.13 Changing the send retry interval and the number of retries for sending unreported information* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.3.14 Changing the send retry interval and the number of retries for sending unreported information* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value (number of times) from 00000001 to 00015180 (1 to 86,400 in decimal)

Default value

dwOrd:000021C0 (8,640 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service starts

**(25) "RecvTimeout"="{Y|N}"**

In interprocess communication for event/action control, if data is not delivered to the receiver for some reason, use this parameter to specify whether to terminate the attempt to receive the data so that the system can proceed to other processing.

Specify this parameter when the communication environment is unstable. For normal operation, specification is not necessary.

Specifiable values

Y

If data is not received within the specified period of time, the data receive processing times out.

N

The system waits for data to arrive.

Default value

N

Recommended value

Default value

When the setting takes effect



The next time the JP1/AJS3 service is started

## 2.5 Setting for the JP1/AJS3 definition pre-check function

The JP1/AJS3 definition pre-check function requires different settings in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

For details about the JP1/AJS3 definition pre-check function, see *6.5.1 Setting up the JP1/AJS3 definition pre-check function* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.5.1 Setting up the JP1/AJS3 definition pre-check function* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

The table below lists the environment setting parameters to be used to set the definition pre-check function in the manager environment (JP1/AJS3 - Manager) and agent environment (JP1/AJS3 - Agent).

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column. To determine whether an environment setting parameter is to be set in the manager environment (JP1/AJS3 - Manager) or the agent environment (JP1/AJS3 - Agent), see the *Applicable product* column.

Table 2-5: Environment setting parameters (settings for the JP1/AJS3 definition pre-check function)

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[JP1_DEFAULT\JP1AJS2\CHECK]	"AJSCHK_CHECKFILE" =	Name of the file that contains the definition pre-check result	Windows UNIX	M
2		"AJSCHK_LOGDIR" =	Name of the directory for the definition check log	Windows UNIX	M, A
3		"AJSCHK_LOGSIZE" =	Size of the definition check log file	Windows UNIX	M, A
4		"AJSCHK_TRACELOGFILE" =	Name of the trace log file for the definition pre-check function	Windows UNIX	M, A
5		"AJSCHK_CHARCODE" =	Character set used for displaying job information or the definition pre-check result	Windows UNIX	M, A

Legend:

M: JP1/AJS3 - Manager

A: JP1/AJS3 - Agent

The following describes each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

**(1) "AJSCHK\_CHECKFILE"="name-of-the-file-used-to-store-the-definition-pre-check-result"**

Use this parameter to specify the name of the file used to the definition pre-check result. Specify a full path name.

If the directory specified for *name-of-file-used-to-store-definition-pre-check-result* does not exist, the file used to store the definition pre-check result will not be output.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

```
%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\ajscheckfile.txt
```

(The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)

- In Windows Server 2003:

```
JP1/AJS3-Manager-installation-folder\log\ajscheckfile.txt
```

- In UNIX:

```
/var/opt/jp1ajs2/log/ajscheckfile.txt
```

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Check Manager service is restarted

**(2) "AJSCHK\_LOGDIR"="name-of-the-directory-for-the-definition-check-log"**

Use this parameter to specify the name of the directory to which the log for the definition pre-check process is output. Specify a full path name.

If the directory specified for *name-of-directory-for-definition-check-log* does not exist, the definition check log will not be output.

Log data is written to the `ajscheck1.log` file under the directory specified in this parameter. If the log data written to the `ajscheck1.log` reaches the size limit specified in the `AJSCHK_LOGSIZE` environment setting parameter, the writing of log data continues to the `ajscheck2.log` file.

Specifiable values

A character string of no more than 180 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log`

(The default value of `%ALLUSERSPROFILE%` is *system-drive*\ProgramData.)

- In Windows Server 2003:

`JP1/AJS3-Manager-installation-folder\log` or `JP1/AJS3-Agent-installation-folder\log`

- In UNIX:

`/var/opt/jp1ajs2/log`

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Check Manager service or the JP1/AJS3 Check Agent service is restarted

### (3) "**AJSCHK\_LOGSIZE**"=**dword:log-file-size**

Use this parameter to specify the size of the log file to which log data is output by the definition pre-check process.

The specified size is to the size definition check log file 1 (`ajscheck1.log`) and of definition check log file 2 (`ajscheck2.log`).

Specifiable values

0, or a value (in kilobytes) from 4 to 1E8480 in hexadecimal (0, or a value from 4 to 2,000,000 in decimal)

Default value

`dword:00001000` (4,096 in decimal)

## Recommended value

Set the value appropriate for the operating environment.

## When the setting takes effect

After the JP1/AJS3 Check Manager service or the JP1/AJS3 Check Agent service is restarted

## Cautionary note

When the information written to file 1 reaches the limit specified in this parameter, the writing of information switches to file 2. When the information written to file 2 reaches the limit, the writing of information switches back to file 1 and existing information is overwritten. Because the repeated switching between files 1 and 2 continually overwrites older information, you must be especially careful when specifying the file size.

**(4) "AJSCHK\_TRACELOGFILE"="name-of-the-trace-log-file"**

Use this parameter to specify the name of the trace log file for the definition pre-check function. Specify a full path name.

If the directory specified for *name-of-trace-log-file* does not exist, the trace log will not be output.

## Specifiable values

A character string of no more than 255 bytes

## Default value

The setup processing assumes the following file name:

- In Windows Server 2008:

%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\log\tracelog.ch

(The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)

- In Windows Server 2003:

*JP1/AJS3-Manager-installation-folder*\log\tracelog.ch or *JP1/AJS3-Agent-installation-folder*\log\tracelog.ch

- In UNIX:

/var/opt/jp1ajs2/log/tracelog.ch

If you do not specify a file name, a trace log is not output.

## Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Check Manager service or the JP1/AJS3 Check Agent service is restarted

**(5) "AJSCHK\_CHARCODE"="{none|C}"**

Use this parameter to specify the character set used to display the job information or the results of the definition pre-check.

Note that the LANG environment variable used during the definition pre-check is the same as the LANG environment variable used when the JP1/AJS3 Check Agent service is started.

Specifiable values

none

The 7-bit ASCII character set is used. There is no code conversion between JP1/AJS3 - Manager and JP1/AJS3 - Agent.

none cannot be specified by using the `jajs_config` command. To specify this value, use the `jbsetcnf` command. For details on the `jbsetcnf` command, see the *Job Management Partner 1/Base User's Guide*.

C

The 7-bit ASCII character set is used. There is no code conversion between JP1/AJS3 - Manager and JP1/AJS3 - Agent.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Check Manager service or the JP1/AJS3 Check Agent service is restarted

Cautionary note

In the following cases, the job information and the definition pre-check results are displayed by using the character set specified in the AJSCHARCODE environment setting parameter.

- C is specified for the AJSCHARCODE environment setting parameter.

## 2.6 Setting up the communication control environment

To set up the communication control environment, perform the necessary setup operations in the manager environment (JP1/AJS3 - Manager). Nothing is required in the agent environment (JP1/AJS3 - Agent).

The table below lists the environment setting parameters to be used to set the communication control environment in the manager environment (JP1/AJS3 - Manager).

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column.

Table 2-6: Environment setting parameters (communication control)

No.	Definition key <sup>#1</sup>	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[{JP1_DEFAULT  <i>logical-host-name</i> }\JP1AJS2\HOST\NETWORK],	"ClientConnectTimeout"=	Connection timeout	Windows UNIX	M
2	[{JP1_DEFAULT  <i>logical-host-name</i> }\JP1AJS2\HOST\NETWORK\ <i>subkey</i> ] <sup>#2</sup> , and	"ClientRetryInterval"=	Connection retry interval	Windows UNIX	M
3	[{JP1_DEFAULT  <i>logical-host-name</i> }\JP1AJSMANAGER\scheduler- <i>service-name</i> \NETWORK\subkey] <sup>#2</sup>	"ClientRetryCount"=	Number of connection retries	Windows UNIX	M

Legend:

M: JP1/AJS3 - Manager

#1

Specify JP1\_DEFAULT for the physical host. For *logical-host-name*, specify the name of a logical host.

#2

For *subkey*, specify QUEUEMANAGER for the job execution control manager, QUEUENOTIFY for the job execution control (Notify), and EVMANAGER for the event/action control manager.

The following explains each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

**(1) "ClientConnectTimeout"=dword:connection-timeout-period**

Use this parameter to specify the connection timeout value to be used when connecting to JP1/AJS3 - Agent.

Note that if the TCP/IP connection timeout value specified in the OS settings is smaller than this value, the setting for the OS takes effect.

Specifiable values

A hexadecimal value (in milliseconds) from 00000000 to 05265C00 (0 to 86,400,000 in decimal)

Default value

dword:00015F90 (90,000 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

If you want to set this parameter on the event/action control manager, see the description in *To set the parameter for event/action control* below.

■ **To set the parameter for event/action control**

This environment setting parameter has no effect if it is specified for the [{JP1\_DEFAULT | *logical-host-name*} \JP1AJS2 \HOST \NETWORK] definition key.

Specifiable values

A hexadecimal value (in milliseconds) from 000003E8 to 000927C0 (1,000 to 600,000 in decimal)

Default value

- In Windows:  
dword:00007530 (30,000 in decimal)
- In UNIX:  
dword:000003E8 (1,000 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect



The next time the JP1/AJS3 service starts

#### Cautionary notes

- If this environment setting parameter is omitted, the default value is used.
- For event/action control, even if a value specified for this environment setting parameter is not within the allowable range for the parameter, the JP1/AJS3 services start with the default value as long as the value is allowed by communication control. The allowable ranges of values for communication control are 0 to 999 and 600001 to 86400000 (milliseconds as a decimal).  
If the specified value is not allowed by communication control, the KAVS1518-E message is output to the integrated trace log, and the JP1/AJS3 services do not start.
- When setting this environment setting parameter in an agent environment, see 2.4(22) *ClientConnectTimeout*.

#### (2) "**ClientRetryInterval**"=**dword:connection-retry-interval**

Use this parameter to specify the retry interval for the remote connection timeout (includes connection to JP1/AJS3 - Agent). This environment setting parameter has no effect on event/action control.

##### Specifiable values

A hexadecimal value (in seconds) from 00000000 to 00015180 (0 to 86,400 in decimal)

##### Default value

dword:00000014 (20 in decimal)

##### Recommended value

Default value

##### When the setting takes effect

The next time the JP1/AJS3 service is started

#### (3) "**ClientRetryCount**"=**dword:number-of-connection-retries**

Use this parameter to specify the number of retries for a remote-communication connection timeout occurring when trying to connect to JP1/AJS3 - Agent. This environment setting parameter has no effect on event/action control.

##### Specifiable values

A hexadecimal value (number of times) from 00000000 to 7FFFFFFF (0 to 2,147,483,647 in decimal)

##### Default value

## 2. Environment Setting Parameters

dwor d : 00000002 (2 in decimal)

Recommended value

Default value

When the setting takes effect

The next time the JP1/AJS3 service is started

## 2.7 Setting up the queueless job execution environment

As the initial step in setting up a new queueless job execution environment, you must first execute the `ajsqlsetup` command. For a manager-agent configuration, you must execute the `ajsqlsetup` command for both the manager and agent.

For details about the `ajsqlsetup` command, see *ajsqlsetup* in *3. Commands Used for Special Operation* in the manual *Job Management Partner 1/Automatic Job Management System 3 Command Reference 2*.

To set up the queueless job execution environment, use the queueless agent environment (queueless agent service).

The table below lists the environment setting parameters to be used to set up the queueless job execution environment in the manager environment (JP1/AJS3 - Manager) and the agent environment (JP1/AJS3 - Agent).

Note that the environment setting parameters to be used to set up a queueless job execution environment cannot be specified by using the `jajs_config` command. Use the `jbssetcnf` command. For details on the `jbssetcnf` command, see the *Job Management Partner 1/Base User's Guide*.

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column. To determine whether an environment setting parameter is to be set in the manager environment (JP1/AJS3 - Manager) or the agent environment (JP1/AJS3 - Agent), see the *Applicable product* column.

*Table 2-7: Environment setting parameters (queueless job execution environment setup)*

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[JP1_DEFAULT\JP1QLAGENT]	"AJSQL_JOBMAX" =	Maximum number of simultaneous jobs within a queueless agent service	Windows UNIX	M, A
2		"AJSQL_CHARCODE" =	Language encoding used to display job information and job output results	Windows UNIX	M, A
3		"AJSQL_JOBWAITMAX" =	Maximum number of waiting jobs within a queueless agent service	Windows UNIX	M, A

2. Environment Setting Parameters

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
4		"AJSQL_NOATTACHREQ" =	Processing when the execution on an unattached logical host is requested	Windows UNIX	M, A
5		"AJSQL_EXECCURRENTSCRIPT" =	Whether to execute a script file in the current path	UNIX	M, A
6		"AJSQL_TRACELOGFILE" =	Trace-log file name	Windows UNIX	M, A
7		"AJSQL_LOADUSERPROFILE" =	Definition of whether to load the user profile	Windows	M, A
8		"AJSQL_VARDQUOTEADD" =	Processing for converting a \$JPLAJS2_JPQTEMPxx\$ variable	Windows UNIX	M, A
9		"AJSQL_CONNECTTIMEOUT" =	Length of time before an attempt to connect to the queueless file transfer service for communication times out	Windows UNIX	M, A
10		"AJSQL_CONNECTCOUNT" =	Number of retries when attempting to connect to the queueless file transfer service	Windows UNIX	M, A
11		"AJSQL_CONNECTINT" =	Retry interval when attempting to connect to the queueless file transfer service for communication	Windows UNIX	M, A
12		"DISABLE_FS_REDIRECTION" =	Setting for disabling file system redirection when jobs are executed in the WOW64 environment	Windows	M, A
13		"ENABLE_LONG_EXT" =	Setting for whether to execute a job specified for an executable file whose extension is 4 bytes or more in an application associated with the executable-file extension	Windows	M, A
14		"AJSQL_CREATEWINDOWSTATION" =	Setting for preventing a problem whereby a queueless job ends abnormally with return value 128	Windows	M, A
15		"AJSQL_EXECLLOG" =	Whether to enable the internal log output function for queueless job execution	Windows UNIX	M, A

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
16		"AJSQL_EXECL OG_FTTPATH" =	Name of the folder used to store the queueless job execution internal log output by the queueless file transfer service	Windows UNIX	M, A
17	[ {JP1_DEFAULT  <i>logical-host-name</i> } \JP1QLAGENT] #	"AJSQL_LOGFILE" =	Log folder name	Windows UNIX	M, A
18		"AJSQL_LOGSIZE" =	Log file size	Windows UNIX	M, A
19		"AJSQL_STATUSFILE" =	Status file name	Windows UNIX	M, A
20		"AJSQL_STATSIZE" =	Status file size	Windows UNIX	M, A
21		"AJSQL_ATTACH" =	Whether to attach the logical host set when the queueless agent service starts	Windows UNIX	M, A
22		"AJSQL_EXECL OG_AGTPATH" =	Name of the folder used to store the internal log of the queueless job execution output by the queueless agent service	Windows UNIX	M, A
23		"AJSQL_AGTWORKPATH" =	Workpath used in a queueless job and the name of a directory for temporary files	Windows UNIX	M, A
24	[ <i>logical-host-name</i> \JP1QLAGENT]	"AJSQL_CLUSTERREQ" =	Processing to be performed if a queueless cluster process is unable to attach a logical host	Windows	M, A
25	[ {JP1_DEFAULT  <i>logical-host-name</i> } \JP1QLAGENT \AJSQL_CLASS \class-name] #	"AJSQL_CJOBMAX" =	Maximum number of jobs that can be executed simultaneously within a class	Windows UNIX	A
26		"AJSQL_CJOBWAITMAX" =	Maximum number of waiting jobs within a class	Windows UNIX	A

Legend:

M: JP1/AJS3 - Manager

A: JP1/AJS3 - Agent

#

Specify JP1\_DEFAULT for the physical host. For *logical-host-name*, specify the name of a logical host.

The following describes each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

**(1) "AJSQL\_JOBMAX"=dword:maximum-number-of-concurrently-executable-jobs-within-a-queueless-agent-service**

Use this parameter to specify the maximum number of concurrently executable jobs within a queueless agent service.

Specify this parameter if you want to limit the number of concurrently executable queueless jobs according to available machine resources.

If the number of jobs exceeds the specified value, the jobs exceeding the value enter the wait status (pooled in memory of the queueless agent). For details about how to specify the number of jobs that can wait, see the explanation of the AJSQL\_JOBWAITMAX environment setting parameter.

Specifiable values

A hexadecimal value from 0 to 400 (0 to 1,024 in decimal)

Default value

- In Windows:

dword:00000005 (5 in decimal)

- In UNIX:

dword:00000400 (1,024 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(2) "AJSQL\_CHARCODE"="{none|C|SJIS|EUC|UTF-8}"**

Use this parameter to specify the character set used to display job information and job output results.

Specify this parameter if the language encoding of the manager host and that of the agent host are different.

The LANG environment variable used when a job is executed is the LANG environment variable specified when the queueless agent service starts.

Specifiable values

none

The 7-bit ASCII character set is used. There is no character code version between the manager and the agent.

C

The 7-bit ASCII character set is used. There is no character code version between the manager and the agent.

SJIS

The Shift JIS character set is used.

EUC

The EUC character set is used.

UTF-8

The UTF-8 character set is specified.

Default value

none

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(3) "AJSQL\_JOBWAITMAX"=dword:maximum-number-of-waiting-jobs-within-the-queueless-agent-service**

Use this parameter to specify the maximum number of jobs that are allowed to wait within a queueless agent service.

Specify this parameter if the peak number of queueless jobs that are being executed exceeds the maximum number of simultaneous jobs.

If the number of jobs exceeds the specified value, the queueless agent service fails to start.

Specifiable values

## 2. Environment Setting Parameters

A hexadecimal value from 0 to 19000 (0 to 102,400 in decimal)

Default value

- In Windows:  
dword:00000800 (2,048 in decimal)
- In UNIX:  
dword:00000000

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

### (4) "AJSQL\_NOATTACHREQ"="{exec|error}"

Use this parameter to specify the processing for a request for execution on an unattached logical host.

Specifiable values

exec

The request is processed on the physical host.

error

The request results in an error.

Default value

exec

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

### (5) "AJSQL\_EXECCURRENTSCRIPT"="{yes|no}"

If you use a relative path to specify the script file, you need to specify whether a script file already in the current path is to be executed when a job is executed.

The current path is the path specified for **Working path**. If a path is not specified for **Working path**, the home directory of the OS user who executes the job is used as the current path.

Specifiable values



yes

The script file in the current path has priority.

no

When a job is executed, the path in the PATH environment variable is followed to find and execute the target script file.

Default value

no

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

Cautionary note

If you specify *yes* for this parameter, the current path is searched to locate the script file. Therefore, the job will fail to start if a hard disk failure or another problem causes the search for the script file to fail.

#### (6) **"AJSQL\_TRACELOGFILE"="trace-log-file-name"**

Use this parameter to specify the name of the trace log file for the queueless agent. Specify a full path name.

If you do not specify this parameter, a trace log is not output.

Specifiable values

A character string of no more than 255 bytes

Default value

The following file is assumed at setup:

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\tracelog.q1` (The default value of `%ALLUSERSPROFILE%` is *system-drive*\ProgramData.)

- In Windows Server 2003:

`JP1/AJS3-installation-folder\log\tracelog.q1`

- In UNIX:

`/var/opt/jp1ajs2/log/tracelog.q1`

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(7) "AJSQ\_LOADUSERPROFILE"="{yes|no}"**

Use this parameter to specify whether to load user the profile information about the OS user who executes a job when a job is executed.

Specify this parameter value if the user information must be set in the logon session of the OS user when PC jobs are executed.

For details, see *6.4.2 Executing a job that requires a user profile in a queueless job execution environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

yes

Specify this value to load the user profile.

no

Specify this value if you do not want to load the user profile.

Default value

no

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(8) "AJSQ\_VARDQUOTEADD"="{yes|no}"**

When a `$JP1AJS2_JPQTEMPxx$` variable is converted, use this parameter to select whether to enclose the variable value after conversion in double quotation marks (").

The setting of this parameter is valid for the physical host and all logical hosts.

Specifiable values

yes

The variable value after conversion is enclosed in double quotation marks (").

no

The variable value after conversion is not enclosed in double quotation

marks (").

Default value

yes

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(9) "AJSQL\_CONNECTTIMEOUT"=dword:connection-timeout-value**

Use this parameter to specify the length of time before an attempt to the connect to the queueless file transfer service times out.

Specifiable values

A hexadecimal value (in seconds) from 00000000 to 00000258 (0 to 600 in decimal).

If you specify `dword:00000000`, the timeout value depends on the connection timeout value of the OS.

Default value

`dword:0000000A` (10 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(10) "AJSQL\_CONNECTCOUNT"=dword:number-of-connection-retries**

Use this parameter to specify the number of retries to be attempted if a communication error occurs during processing to connect to the queueless file transfer service.

Specifiable values

A hexadecimal value (in seconds) from 00000000 to 00000064 (0 to 100 in decimal)

Default value

`dword:00000003` (3 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(11) "JSQL\_CONNECTINT"=dword:retry-interval-for-communication-connection**

Use this parameter to specify the retry interval if a communication error occurs during processing to connect to the queueless file transfer service.

Specifiable values

A hexadecimal value (in seconds) from 00000000 to 0000003C (0 to 60 in decimal)

Default value

dword:00000001 (1 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(12) "DISABLE\_FS\_REDIRECTION"=dword:setting-value**

Use this parameter to specify whether to disable file system redirection when jobs are executed in the WOW64 environment and **Queueless Agent** is specified for **Exec. service**.

For details, see *6.6.2 Disabling file system redirection when jobs are executed in a WOW64 environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

0

File system redirection is enabled when jobs are executed in the WOW64 environment.

1

File system redirection is disabled when jobs are executed in the WOW64 environment.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(13) "ENABLE\_LONG\_EXT"=dword:setting-value**

Use this parameter to specify whether to execute a job specified for an executable file whose extension is 4 bytes or more in an application associated with the executable-file extension when **Queueless Agent** has been specified for **Exec. service**.

For details, see *6.2.18 Executing a job whose executable file name has an extension longer than three bytes* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

0

Although the executable-file extension is 4 bytes or more, the job specified for the file is executed in the application that is associated with the first three digits of the executable-file extension.

If the system cannot find the application that is associated with the first three digits of the extension, the job does not start.

1

If the executable-file extension is 4 bytes or more, the job is executed in the application that is associated with the extension.

If **Standard** is specified for **Exec. service**, the job is executed with a long file name when the executable file is executed with an extension of 4 bytes or more.

Default value

dword:00000000 (0 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(14) "AJSQL\_CREATEWINDOWSTATION"="{yes|no}"**

Use this parameter to specify whether to prevent a problem whereby a job ends abnormally with return value 128.

For details, see *6.4.3 Preventing a queueless job from ending abnormally with return value 128* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

yes

A problem whereby a job ends abnormally with return value 128 is prevented.

no

A problem whereby a job ends abnormally with return value 128 is not prevented.

Default value

no

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(15) "AJSQL\_EXECLOG"="{yes|no}"**

Use this parameter to specify whether to enable the internal log output function for queueless job execution.

Specifiable values

yes

The internal log output function for the queueless job execution is enabled.

no

The internal log output function for the queueless job execution is disabled.

Default value

yes

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service or the JP1/AJS3 Queueless File Transfer service is restarted

**(16) "AJSQL\_EXECLOG\_FTPPATH"="name-of-the-directory-used-to-store-the-internal-log-output-by-the-queueless-file-transfer-service"**

Use this parameter to specify the name of the directory used to store the internal log data output by the queueless file transfer service. Specify a full path name.

## Specifiable values

A character string of no more than 200 bytes

## Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log`  
 (The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)
- In Windows Server 2003:  
`JP1/AJS3-Manager-installation-folder\log`
- In UNIX:  
`/var/opt/jp1ajs2/log`

## Recommended value

Default value

## When the setting takes effect

After the JP1/AJS3 Queueless File Transfer service is restarted

## Cautionary note

Specify the name of a directory on the local disk.

**(17) "AJSQL\_LOGFILE"="log-folder-name"**

Use this parameter to specify the name of the log folder to which the messages related to starting and ending executed jobs are output. Specify a full path name.

## Specifiable values

A character string of no more than 180 bytes

## Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log`  
 (The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)
- In Windows Server 2003:  
`JP1/AJS3-installation-folder\log`
- In UNIX:  
 For a physical host: `/var/opt/jp1ajs2/log`

For a logical host: *shared-directory-name*/jp1ajs2/log

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

**(18) "AJSQL\_LOGSIZE"=dword:log-file-size**

Use this parameter to specify the size of the log file.

Because this log file used to check the job execution status, specify a size that is sufficient for storing the log data for at least one day.

As the log file, the system uses two files (file 1 and file 2), each of which has the size specified for this parameter.

Specifiable values

0 or a value (in kilobytes) from 4 to 1E8480 in hexadecimal (0 or a value from 4 to 2,000,000 in decimal)

Default value

dword:00002000 (8,192 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

Cautionary note

When the information written to file 1 reaches the limit specified in this parameter, the writing of information switches to file 2. When the information written to file 2 reaches the limit, the writing of information switches back to file 1 and existing information is overwritten. Because the repeated switching between files 1 and 2 continually overwrites older information, you must be especially careful in specifying the file size.

**(19) "AJSQL\_STATFILE"="status-file-name"**

Use this parameter to specify the name of the status file used to store information about running jobs. Specify a full path name.

Specifiable values



A character string of no more than 255 bytes

#### Default value

- In Windows Server 2008:  
`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log\ajsqlstat.dat` (The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)
- In Windows Server 2003:  
`JP1/AJS3-installation-folder\log\ajsqlstat.dat`
- In UNIX:  
 For a physical host: `/var/opt/jp1ajs2/log/ajsqlstat.dat`  
 For a logical host: `shared-directory-name/jp1ajs2/log/ajsqlstat.dat`

#### Recommended value

Default value

#### When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

### (20) **"AJSQL\_STATSIZE"=dword:status-file-size**

Use this parameter to specify the size of the status file used to store information about running jobs.

When the a status file is used, although nodes are switched for the requesting scheduler service and executing queueless agent before job-end results are reported to the requesting manager, the job-end results can be reported after a restart.

The job status can be managed on the manager side even if the scheduler service requesting execution of a queueless job fails during job execution. If you want to improve the reliability, specify this parameter.

One kilobyte corresponds to the information for about 12 jobs.

#### Specifiable values

0 or a value (in kilobytes) from 4 to 1E8480 in hexadecimal (0 or 4 to 2,000,000 in decimal)

#### Default value

`dword:00000800` (2,048 in decimal)

#### Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

Cautionary note

If you specify 0 for this parameter, the information about running jobs is not stored. If nodes are switched for the scheduler service requesting execution during job execution, the end status of a running job will be unknown.

If you specify a non-zero value, the job status might be displayed as *Ended abnormally* even if the job itself has terminated normally. This is because an attempt to transfer output (the information sent by the job to the standard error output) from the agent host to the manager host has failed. You can prevent this problem from occurring by only sending output to the standard error output when an error occurs.

**(21) "AJSQL\_ATTACH"="{yes|no}"**

Use this parameter to specify whether to attach the logical host that was set when the queueless agent service started.

This item is effective only if you specify the logical host key.

Specifiable values

yes

The logical host is attached.

no

The logical host is not attached.

To enable the logical host to be used, use the `ajsqlattach` command to attach it after starting the queueless agent service.

Default value

no

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted

**(22) "AJSQL\_EXECLOG\_AGTPATH"="name-of-the-directory-used-to-store-the-internal-log-output-by-the-queueless-agent-service"**

Use this parameter to specify the name of the directory used to store the internal log data output by the queueless agent service. Specify a full path name.

Specifiable values

A character string of no more than 200 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\log`  
(The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)

- In Windows Server 2003:

`JP1/AJS3-Manager-installation-folder\log`

- In UNIX:

`/var/opt/jp1ajs2/log`

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

Cautionary note

Specify the name of a directory on the local disk.

The directory name for cluster use is as follows:

*name-of-the-directory-used-to-store-the-internal-log-output-by-the-queueless-agent-service*/ajsqlexeclog- [logical-host-name]

If the full path name is 256 bytes or more, the first 30 bytes are used as the logical host name specified for *logical-host-name*.

If there are multiple logical hosts satisfying the above conditions and the first 30 bytes of their names are the same, the internal logs of these logical hosts are output to the same file. However, if the internal logs of multiple logical hosts are output to the same file, starting the queueless job might slow down and the output of internal logs might fail.

If the internal logs of multiple logical hosts will be output to the same file, specify

a different directory path for the `AJSQL_EXECLOG_AGTPATH` environment setting parameter for each logical host, so that the internal logs will be output to different files. If you change the value of the `AJSQL_EXECLOG_AGTPATH` environment setting parameter to a non-default value, you also have to edit the contents of the data collection sample script. For details, see *7.1 Collecting log data* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

**(23) "AJSQL\_AGTWORKPATH"="work-path-used-in-the-queueless-job-and-the-name-of-the-directory-for-temporary-files"**

Use this parameter to specify the work path to be used for queueless jobs and the name of the directory to be used for temporary files. Specify a full path name.

Specifiable values

A character string of no more than 100 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJ2\tmp`  
(The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)

- In Windows Server 2003:

`JP1/AJS3-Manager-installation-folder\tmp`

- In UNIX:

`/var/opt/jp1ajs2/tmp`

Recommended value

Set a value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

**(24) "AJSQL\_CLUSTERREQ"="{exec|error}"**

Use this parameter to specify whether to abnormally terminate a queueless cluster process if it fails to attach a logical host.

Specifiable values

`exec`

The startup of the process continues, and the queueless cluster process does not terminate abnormally. Startup of the JP1/AJS3 service also continues.

If you specify `exec`, startup of the process continues even if an attempt to attach a logical host fails. Accordingly, you need to execute the `ajsqlstatus` command after nodes are switched, to check whether the logical host has been attached successfully. If the attachment has failed, use the integrated trace log to determine the cause of the error and then correct the error. You can then use the `ajsqlattach` command to attach the logical host.

`error`

The queueless cluster process terminates abnormally. Startup of the JP1/AJS3 service also terminates abnormally.

Default value

`exec`

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 service is restarted

**(25) "AJSQL\_CJOBMAX"=dword:maximum-number-of-simultaneous-jobs-within-a-class**

Use this parameter to specify the maximum number of jobs that can be executed simultaneously within a class.

For details, see *6.4.1 Executing jobs with a class specified in a queueless job environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.4.1 Executing jobs with a class specified in a queueless job environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value from 0 to 400 (0 to 1,024 in decimal)

Default value

- In Windows:  
dword:00000005 (5 in decimal)
- In UNIX:  
dword:00000400 (1,024 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

**(26) "AJSQL\_CJOBWAITMAX"=dword:maximum-number-of-jobs-that-can-wait-in-a-class**

Use this parameter to specify the maximum number of queueless jobs that can be stored in queueless agent service memory if the number of jobs exceeds the maximum number of simultaneous jobs in the class.

For details, see *6.4.1 Executing jobs with a class specified in a queueless job environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.4.1 Executing jobs with a class specified in a queueless job environment* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

A hexadecimal value from 0 to 19000 (0 to 102,400 in decimal)

Default value

- In Windows:  
dword:00000800 (2,048 in decimal)
- In UNIX:  
dword:00000000 (0 in decimal)

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After the JP1/AJS3 Queueless Agent service is restarted or the logical host is attached

## 2.8 Setting up the JP1/AJS3 Console environment

Setup of the JP1/AJS3 Console environment that enables centralized monitoring of jobs during automatic operation, differs between the JP1/AJS3 Console Manager environment and the JP1/AJS3 Console Agent environment.

For JP1/AJS3 Console Manager, set the definition key [JP1\_DEFAULT\JP1AJS2CONSOLEMANAGER]. Even if you use a logical host still use the value of the JP1\_DEFAULT host key for all environment setting parameters other than DATADIRECTORY.

For JP1/AJS3 Console Agent, set the definition key [JP1\_DEFAULT\JP1AJS2CONSOLEAGENT]. If you plan to monitor logical host objects, set environment setting parameters under the JP1\_DEFAULT host key.

The table below lists the JP1/AJS3 Console Manager environment setting parameters to be set in JP1/AJS3 Console Manager environment, and the JP1/AJS3 - Console Agent environment setting parameters to be set in the JP1/AJS3 - Agent environment.

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column. To determine whether an environment setting parameter is to be set in the manager environment (JP1/AJS3 Console Manager) or the agent environment (JP1/AJS3 Console Agent), see the *Applicable product* column.

Table 2-8: Environment setting parameters (JP1/AJS3 Console environment setup)

No.	Environment setting parameter	Definition and default value	Applicable OS	Applicable product
1	"MAXSESSION" =	Maximum number of simultaneous sessions	Windows UNIX	M, A
2	"IPC_TIMEOUT" =	Remote communication timeout period	Windows UNIX	M
3	"IPCRETRYINTERVAL" =	Retry interval	Windows UNIX	M
4	"IPCRETRYCOUNT" =	Number of retries	Windows UNIX	M
5	"SESSIONTIMEOUT" =	Connection timeout period	Windows UNIX	M
6	"CHARCODE" =	Character set used for information to be stored in user-defined data	Windows UNIX	M

## 2. Environment Setting Parameters

No.	Environment setting parameter	Definition and default value	Applicable OS	Applicable product
7	"SYSLOGCODE" =	Character set used to output a log file	UNIX	M, A
8	"HNTRLOGLEVEL" =	Level of messages to be output to the integrated trace log	Windows UNIX	M, A
9	"DATADIRECTORY" =	Name of the data directory for root scope	Windows UNIX	M
10	"RECONNECTINTERVAL" =	Interval at which reconnection to JP1/AJS3 Console Agent is attempted.	Windows UNIX	M
11	"TRACELOGFILE" =	Name of the trace log file for JP1/AJS3 Console Manager	Windows UNIX	M, A
12	"IPC_CONNECTTIMEOUT" =	Remote connection timeout value	Windows UNIX	M
13	"ENABLEOPERATION" =	Permission for operation functions	Windows UNIX	A

### Legend:

M: JP1/AJS3 Console Manager

A: JP1/AJS3 Console Agent

### Note:

If there is an error in the specification of the DATADIRECTORY environment setting parameters, a login error occurs in JP1/AJS3 Console View. If there is an error in the specification of the environment setting parameters other than DATADIRECTORY, the system assumes the standard JP1/AJS3 Console Manager setting.

The following describes each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

### (1) "MAXSESSION"=dword:maximum-number-of-simultaneous-sessions

Use this parameter to specify the maximum number of JP1/AJS3 Console View



connections in JP1/AJS3 Console Manager, and the maximum number of JP1/AJS3 Console Manager connections in JP1/AJS3 Console Agent.

If the maximum number of JP1/AJS3 Console View or JP1/AJS3 Console Manager connections is more than 16, specify a suitable value for the number. If resources are limited, decrease the value to limit the number of JP1/AJS3 Console View or JP1/AJS3 Console Manager connections.

An error occurs if the number of JP1/AJS3 Console View or JP1/AJS3 Console Manager connections exceeds the specified value.

Specifiable values

A hexadecimal value from 0 to 40 (0 to 64 in decimal)

Default value

`dword:00000010` (16 in decimal)

Recommended value

Default value

When the setting takes effect

- For JP1/AJS3 Console Manager  
After the JP1/AJS3 Console Manager service is restarted
- For JP1/AJS3 Console Agent  
After the JP1/AJS3 Console Agent service is restarted

**(2) "IPC\_TIMEOUT"=`dword:connection-timeout`**

Use this value to specify the timeout period for establishing communication with JP1/AJS3 Console Agent.

If communication cannot be established within the specified time, an error occurs. In that case, control is determined by the OS timeout period.

Specify a value other than 0 if you want to set an explicit timeout period rather than depend on the OS timeout period.

Specifiable values

A hexadecimal value (in seconds) from 0 to 258 (0 to 600 in decimal)

Default value

`dword:00000000` (0 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(3) "IPCRETRYINTERVAL"=dword:retry-interval**

Use this parameter to specify the retry interval when a communication error occurs.

Depending on the communication error status, change the parameter value and the value for the IPCRETRYCOUNT environment setting parameter (number of retries).

Each time a retry occurs, the specified value increases.

Specifiable values

A hexadecimal value (in seconds) from 0 to A (0 to 10 in decimal)

Default value

dword:00000001 (1 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(4) "IPCRETRYCOUNT"=dword:number-of-retries**

Use this parameter to specify the number of retries to be performed when a communication error occurs.

Depending on the communication error status, change the parameter value and the value for the IPCRETRYINTERVAL environment setting parameter (retry interval).

Specifiable values

A hexadecimal value from 0 to 64 (0 to 100 in decimal)

Default value

dword:00000003 (3 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(5) "SESSIONTIMEOUT"=dword:connection-timeout-period**

Use this parameter to specify how long the system waits after the last communication with JP1/AJS3 Console View before it severs the connection.

## Specifiable values

- In Windows:  
A hexadecimal value (in minutes) from 0 to 78 (0 to 120 in decimal)
- In UNIX:  
A hexadecimal value (in minutes) from 1 to 78 (1 to 120 in decimal)

## Default value

dword:00000078 (120 in decimal)

## Recommended value

Default value

## When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(6) "CHARCODE"="{C}"**

Use this parameter to specify only one character set that is to be used for the name and definitions of the nested application scope or monitored objects.

## Specifiable values

C

The ASCII character set

## Default value

C

## Recommended value

Default value

## When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(7) "SYSLOGCODE"="{C}"**

Use this parameter to specify the language type of the messages that are output to the syslog file.

## Default value

C

## Specifiable values

C

Messages are output in English ASCII character set.

Recommended value

Default value

When the setting takes effect

- For JP1/AJS3 Console Manager  
After the JP1/AJS3 Console Manager service is restarted
- For JP1/AJS3 Console Agent  
After the JP1/AJS3 Console Agent service is restarted

**(8) "HNTRLOGLEVEL"="{none|error|warn|info}"**

Use this parameter to specify the level of messages that are output to the integrated trace log.

Specify this parameter if you want to output detailed log information to the integrated trace log.

Specifiable values

none

No messages are output.

error

Error messages are output.

warn

Warning messages are output.

info

Information messages are output.

Default value

error

Recommended value

Default value

When the setting takes effect

- For JP1/AJS3 Console Manager  
After the JP1/AJS3 Console Manager service is restarted
- For JP1/AJS3 Console Agent

After the JP1/AJS3 Console Agent service is restarted

**(9) "DATADIRECTORY"="data-directory-path"**

Use this parameter to specify the name of the directory used to store the definition information of the root scope. Specify a full path name.

Specify this parameter if you want to change location where the definition data is saved to a location other than the default directory.

To change the location, specify an existing directory. If you want to specify a new data directory, create the directory first and then specify the name. Specifying a directory that does not exist results in an error when you log in to JP1/AJS3 Console View.

Do not delete the files in the directory specified in this parameter.

Specifiable values

A character string of no more than 191 bytes

Default value

- In Windows Server 2008:

`%ALLUSERSPROFILE%\HITACHI\JP1\JP1_DEFAULT\JP1AJS2\database`  
 (The default value of `%ALLUSERSPROFILE%` is `system-drive\ProgramData`.)

- In Windows Server 2003:

`JP1/AJS3-Console-installation-folder\database`

- In UNIX:

`/var/opt/jp1ajs2cm/database`

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(10) "RECONNECTINTERVAL"=dword:interval-for-reconnecting-to-JP1/AJS3-Console-Agent**

Use this parameter to specify the interval at which connection to JP1/AJS3 Console Agent is retried when connection to the agent fails.

Specify this parameter if you want to change the interval until the next connection when you cannot connect to the JP1/AJS3 Console Agent to be monitored.

Specifiable values

A hexadecimal value (in seconds) from 1E to E10 (30 to 3,600 in decimal)

Default value

dword:0000012C (300 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(11) "TRACELOGFILE"="trace-log-file-name"**

Use this parameter to specify the trace log file name. Specify a full path name.

Specify the name of a trace log file on the local disk so that trace information will be recorded reliably.

Because the system creates a new file whenever trace information is output, do not specify the name of an existing file.

Specifiable values

A character string of no more than 255 bytes

Default value

- In Windows Server 2008:

JP1/AJS3 - Manager:

%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2CM\log\tracelog.cm

JP1/AJS3 - Agent:

%ALLUSERSPROFILE%\HITACHI\JP1\JP1\_DEFAULT\JP1AJS2\log\tracelog.ca

(The default value of %ALLUSERSPROFILE% is *system-drive*\ProgramData.)

- In Windows Server 2003:

JP1/AJS3 - Manager: *JP1/*

*AJS3-Console-installation-folder*\log\tracelog.cm

JP1/AJS3 - Agent: *JP1/*

*AJS3-Manager-installation-folder*\log\tracelog.ca

- In UNIX:

JP1/AJS3 - Manager: /var/opt/jp1ajs2cm/log/tracelog.cm

JP1/AJS3 - Agent: /var/opt/jp1ajs2/log/tracelog.ca

Recommended value

Default value

When the setting takes effect

- For JP1/AJS3 Console Manager  
After the JP1/AJS3 Console Manager service is restarted
- For JP1/AJS3 Console Agent  
After the JP1/AJS3 Console Agent service is restarted

**(12) "IPC\_CONNECTTIMEOUT"=dword:remote-connection-timeout-value**

Use this parameter to specify the connection timeout period for remote communication with JP1/AJS3 Console Agent.

If the timeout period for TCP/IP connection set in the OS is shorter than the value specified in this parameter, the OS setting is used.

Specifiable values

A hexadecimal value (in seconds) from 0 to 258 (0 to 600 in decimal)

Default value

dword:00000014 (20 in decimal)

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Manager service is restarted

**(13) "ENABLEOPERATION"="{yes|no}"**

Use this parameter to specify whether to enable operation form of JP1/AJS3 Console View.

Specifiable values

yes

Operation from JP1/AJS3 Console View is enabled.

no

Operation from JP1/AJS3 Console View is disabled.

Specify this value if you do not want operations to be performed from JP1/AJS3 Console View for a jobnet on the target host.

Default value

yes

## 2. Environment Setting Parameters

Recommended value

Default value

When the setting takes effect

After the JP1/AJS3 Console Agent service is restarted



## 2.9 Setting up JP1/AJS3 shared information

The same settings for JP1/AJS3 shared information can be used for the manager environment (JP1/AJS3 - Manager) and for the agent environment (JP1/AJS3 - Agent).

The table below lists the environment setting parameters to be used to set JP1/AJS3 shared information in the manager environment (JP1/AJS3 - Manager) and in the agent environment (JP1/AJS3 - Agent).

To determine whether an environment setting parameter is to be set in Windows or UNIX, see the *Applicable OS* column.

Table 2-9: Environment setting parameters (JP1/AJS3 shared information)

No.	Definition key	Environment setting parameter	Definition	Applicable OS	Applicable product
1	[ <code>{JP1_DEFAULT   logical-host-name}\JP1AJS2COMMON</code> ] <sup>#</sup>	"LARGEFILEUSE" =	Operation for large files	Windows UNIX	M, A
2		"SYSLOGJOBMSG" =	Setting for whether the error messages for jobs are also to be output to syslog	UNIX	M, A
3		"MACROCHANGEFAIL" =	Operation if an attempt to expand a macro variable specified in an event job fails when the job is registered for execution registration	Windows UNIX	M, A

Legend:

M: JP1/AJS3 - Manager

A: JP1/AJS3 - Agent

#

Specify `JP1_DEFAULT` for the physical host. For *logical-host-name*, specify the name of a logical host.

The following describes each of the environment setting parameters.

Parameters that are not described here are used for maintenance purposes. Do not change their values.

The default value is used whenever a value is not specified for an environment setting parameter.

**(1) "LARGEFILEUSE"="{yes|no}"**

Use this parameter to specify whether the file monitoring job monitors large files and the judgment job determines if there are any large files.

For details, see *14.3.12 Enabling monitoring of a large file* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

yes

The file monitoring job monitors files larger than 2 GB and the judgment job determines if there are any files larger than 2 GB.

no

The file monitoring job cannot monitor files that are larger than 2 GB. If you specify no, but specify a file larger than 2 GB as a monitoring target, an error message is output to the integrated trace log when execution of the file monitoring job terminates abnormally. For this reason, do not specify a file larger than 2 GB as a monitoring target.

The judgment job cannot determine if there are any files larger than 2 GB. If you specify a file larger than 2 GB in a judgment condition when you have specified no, the judgment job determines that there are no large files.

Default value

no

Recommended value

Set the value appropriate for the operating environment.

When the setting takes effect

After JP1/AJS3 is restarted

**(2) "SYSLOGJOBMSG"="{none|error}"**

Use this parameter to specify whether to also output error messages appearing during the execution of jobs to syslog.

For details, see *14.6.1 Settings for outputting error messages for jobs to syslog* in the *Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1*.

Specifiable values

none

Error messages appearing during the execution of jobs are not output to syslog. The status of JP1/AJS3 is monitored by the integrated trace log.

`error`

Error messages appearing during the execution of jobs are output to the syslog file, which is used to monitor the error status of JP1/AJS3. However, even if you specify this value, you must not stop the integrated trace log process.

If you specify `error` for this parameter, a message reporting abnormal job termination (KAVS0265-E) is output to syslog, regardless of whether the scheduler service setting contains `JOBSYSLOG` (outputs, to syslog, messages related to starting and ending a job).

The following table lists the messages that are output based on the values specified for the `SYSLOGJOBMSG` and `JOBSYSLOG` environment setting parameters.

*Table 2-10:* Messages to be output based on the values specified for `SYSLOGJOBMSG` and `JOBSYSLOG`

Value specified for <code>SYSLOGJOBMSG</code>	Value specified for <code>JOBSYSLOG</code>					
	<code>none</code>	<code>abend</code>	<code>warning</code>	<code>hold</code>	<code>enddelay</code>	<code>all</code>
<code>none</code>	--	KAVS0265 -E	KAVS0269 -W	KAVS0271 -I	KAVS0248 -I	KAVS0263 -I KAVS0264 -I KAVS0265 -E KAVS0266 -I KAVS0269 -W KAVS0271 -I

2. Environment Setting Parameters

Value specified for SYSLOGJOBMSG	Value specified for JOBSYSLOG					
	none	abend	warning	hold	enddelay	all
error	KAVS0265 -E	KAVS0265 -E	KAVS0265 -E KAVS0269 -W	KAVS0265 -E KAVS0271 -I	KAVS0265 -E KAVS0248 -I	KAVS0263 -I KAVS0264 -I KAVS0265 -E KAVS0266 -I KAVS0269 -W KAVS0271 -I

Default value

none

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted

**(3) "MACROCHANGEFAIL"="{yes|no}"**

Use this parameter to specify whether to set **Failed to start** as the status if expansion of the passing information in a macro variable fails when a job is executed.

For details, see *6.2.10 Setting the action to be taken if the value of a macro variable cannot be passed in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for Windows) or *14.2.10 Setting the action to be taken if the value of a macro variable cannot be passed in the Job Management Partner 1/Automatic Job Management System 3 Configuration Guide 1* (for UNIX).

Specifiable values

yes

If the expansion of the passing information in a macro variable fails when a job is executed, the status set is **Failed to start**, and an error message is output to the Hitachi integrated log and as execution result details so that you can check the macro variable that could not be expanded.

no

Even if the expansion of the passing information in a macro variable fails when a job is executed, the system treats the information defined in the macro variable as a character string and continues processing.

Default value

no

Recommended value

Default value

When the setting takes effect

After JP1/AJS3 is restarted



---

# Appendixes

---

- A. Version Revisions
- B. Changes in 3020-3-S06-04(E)
- C. Glossary

## A. Version Revisions

---

This appendix lists the changes in each version of the JP1/AJS series programs.

### A.1 Revisions in 09-00

The following lists the revisions in 09-00 for each program.

#### (1) JP1/AJS3 - Manager

- The standard database of JP1/AJS3 is now an embedded database.
- Functions related to an embedded database have been changed as follows:
  - The sizes of the large-scale, medium-scale, and small-scale database models have been changed.
  - The database area auto-increment function and the system log auto-increment function have been added.
  - The system log is no longer used.
  - The functions of the commands used to control an embedded database have been enhanced.
- The ISAM database is now used only for QUEUE jobs and submit jobs.
- An agent management function has been added for specifying a logical execution agent name as the destination host for a job or jobnet. Previously, users could only specify execution hosts by their real names.
- Jobs that are in the *Now queuing* status when the service is stopped are now returned to the *Wait for prev. to end* status when the service restarts (in hot-start mode), before being resubmitted.
- A jobnet release function has been added for replacing the definition of a jobnet that is registered for execution with another definition.
- The job execution control manager process (jqman) and event/action control manager process (jpomanager) can now be started on a scheduler service basis.
- A scheduler log file can now be output for an individual scheduler service or host.
- The following functions have been enhanced:
  - The method by which the number of logs to keep is managed
  - The process by which monitored generations of jobnets with start conditions are established
  - The process by which execution generations when a start condition is established are held



- A format specification has been added to the `ajsshow` command for outputting the standard output file name.
- The Manager Environment Settings dialog box is no longer provided. Instead, you can use the `jajs_config` command to set up the manager environment.
- A function has been added to support end delay monitoring based on how long a job takes to execute.
- The jobnet connector functionality has been enhanced to enable control of the execution order of root jobnets managed by different scheduler services.
- The definition pre-check has been enhanced so that if an invalid execution order is found in the units of the jobnet being checked, the names of the units are output to the check results file.
- The file permission check performed at execution of a Unix job has been enhanced to include checks of the access control list and secondary group settings as well as file permissions.
- A function has been added that enables event jobs to continue executing even if the JP1/AJS3 service stops on the execution host.
- A function has been added for exporting and importing the registration statuses of jobnets as registered execution-schedule information.
- Linkage with message queues on UNIX hosts (TP1/LiNK, TP1/Message Queue, MQSeries) is no longer supported.
- Windows Server 2008 has been added as platforms supported by JP1/AJS3 - Manager.
- A unit called a jobnet connector which controls the execution order of root jobnets has been added.
- An option has been added to output a detailed history of user operations, such as changes to jobnet definitions, to the scheduler log.
- The `ajslogprint` command for extracting log entries from the scheduler log has been added.

## **(2) JP1/AJS3 - Agent**

- The Agent Environment Settings dialog box is no longer provided. Instead, you can use the `jajs_config` command to set up the agent environment.
- Linkage with a message queue system is no longer supported.
- The file permission check performed at execution of a Unix job has been enhanced to include checks of the access control list and secondary group settings as well as file permissions.
- Linkage with message queues on UNIX hosts (TP1/LiNK, TP1/Message Queue,

MQSeries) is no longer supported.

- Windows Server has been added as platforms supported by JP1/AJS3 - Agent.

### **(3) JP1/AJS3 - View**

- An agent management function has been added for specifying a logical execution agent name as the destination host for a job or jobnet. Previously, users could only specify execution hosts by their real names.
- A jobnet release function has been added for replacing the definition of a jobnet that is registered for execution with another definition.
- Function menus have been added to the JP1/AJS3 - View window to facilitate task-oriented operation.
- The JP1/AJS3 - View window (Summary Monitor window) has been added. In this window, you can view the progress of jobnets and other information.
- JP1/AJS3 - View can now be started in the following modes:
  - Normal mode  
In this mode, the JP1/AJS3 - View window is equipped with function menus.
  - Monitoring mode  
A mode dedicated to monitoring jobs and jobnets. Only the JP1/AJS3 - View window (Summary Monitor window) is displayed.
  - Compatible mode  
JP1/AJS3 - View operates in the same way as JP1/AJS2 - View version 8 or earlier.
- A Detailed Information area has been added to the JP1/AJS3 - View window (Main window), which displays detailed information about a unit.
- The concurrent execution setting of monitored generations and the holding behavior of execution generations (produced when a start condition is satisfied) can now be selected in the detailed definition of a start condition.
- A list filter function has been added for filtering the information in a list.
- A function has been added for saving list information in CSV format.
- You can now click a button in the Daily Schedule window and Monthly Schedule window to move between days and months.
- A list area has been added to the Jobnet Editor window and Jobnet Monitor window. This area displays the jobs defined in the jobnet.
- A Search window has been added, in which you can set detailed search conditions and perform operations on units listed in the search results.

- You can now use a mouse wheel to scroll inside JP1/AJS3 - View.
- A function has been added that allows you to select whether **Type** in list areas are grouped by type or displayed in detailed format.
- A function has been added for prohibiting changes to specific definition items in the Define Details dialog box.
- A function has been added for removing icons you no longer use from the icon list area in the Jobnet Editor window.
- Windows 7 has been added as a supported OS (JP1/AJS3 - View 09-00-05 or later).
- A function has been added to support end delay monitoring based on how long a job takes to execute.
- The jobnet connector functionality has been enhanced to enable control of the execution order of root jobnets managed by different scheduler services.
- An option has been added to the Filter Settings dialog box so that jobnets with hold plans can be treated as jobnets in *Being held* status for filtering purposes in the Daily Schedule window and Monthly Schedule window.
- The ability to define, operate, and monitor jobnet connectors which control the execution order of root jobnets has been added.
- A function that displays the preceding and succeeding jobs of a given job or jobnet in bold has been added.
- Support for Windows Vista has been added.

## A.2 Revisions in 08-00

The following lists the revisions in 08-00 for each program.

### (1) JP1/AJS2 - Manager

- The recommended values for the environment settings are now set during installation and setup.
- A Monitoring Files job can now monitor files larger than 2 gigabytes (large files).
- The `ajsstatus` command can now output the connection status of JP1/AJS2 - View.
- The following commands used to control an embedded database have been added:
  - `ajsembdbaddarea` command (expands a database area in an embedded database)
  - `ajsembdbaddlog` command (expands a log area in an embedded database)
  - `ajsembdbcancel` command (cancels execution of a command)

manipulating an embedded database)

- `ajsembdboplog` command (manipulates embedded database logs)
- `ajsembdbreclaim` command (maintains an embedded database)
- `ajsembdbrolog` command (unloads and reloads an embedded database )
- `ajsembdbstr` command (backs up and restores an embedded database)
- `ajsembdbstart` command (starts an embedded database)
- `ajsembdbstatus` command (monitors an embedded database )
- `ajsembdbstop` command (stops an embedded database)
- `ajsembdbunset` command (removes the setup of an embedded database)

With support of the `ajsembdbreclaim` command, the time required to reclaim free pages has been reduced.

- JP1/Performance Management - Agent Option for JP1/AJS2 can now be linked with JP1/AJS2 to analyze the operating status.
- The `jajs_start` command and the `jajs_start.cluster` command can now check whether a process has already been started when JP1/AJS2 is started. (UNIX only)

### **(2) JP1/AJS2 - Agent**

- The recommended values for the environment settings are now set during installation and setup.
- A Monitoring Files job can now monitor files larger than 2 gigabytes (large files).

### **(3) JP1/AJS2 - View**

- Icons have been changed.

## **A.3 Revisions in 07-50**

### **(1) JP1/AJS2 - Manager**

- Macro variables can now be used during registration for execution to specify information to be passed.
- Judgment jobs can now perform variable judgment.
- A function has been added that suppresses jobnet executions that follow an abnormally terminated jobnet and that will be started when their start conditions are satisfied.
- A definition pre-check function has been added for conducting a final check before starting production in the production environment after the unit definitions are migrated from the development environment.

- The `jpomanevreset` command has been added for deleting data accumulated in the event action manager if a large amount of unprocessed data accumulated in the event action manager has caused delay. To identify the start conditions and agents that have caused this problem, the `jpomanevshow` command has also been added for displaying information about agents that frequently send data to the manager and the start conditions.
- A function that alleviates consumption of the Desktop heap has been added. (Windows only)
- A function has been added for specifying the maximum wait time for the scheduler service to connect to a database.
- Messages that were output to only the integrated trace log can now be output to syslog also. (UNIX only)
- The following functions have been added to the data collection tool:
  - Specifying a logical host name
  - Filtering the data to be collected
  - Adding types of data that can be collected
- Descriptions of messages have been improved.
- An urgent command has been added that can be executed if an error occurs.
- A function has been added that places limits on, for example, the size of files that can be received, to prevent a part of job processing from affecting the entire system operation.
- A function has been added that performs a synchronized write when updating event job information or the wait information file.
- The monitoring interval for linkage with MQ Series can now be specified in seconds.
- If a TCP/IP connection error occurs, the retry interval and count can now be changed.
- The policy to determine the agent hosts to which a job will be dispatched can now be specified.
- All the detailed processes of the event action function can now be stopped to terminate the agent process for the event action function if any of the detailed processes have terminated upon receiving a signal.
- Microsoft(R) Visual C++ .NET Version 2003 is now supported as a compiler for the provided code functions.
- The `ajsshow` command can now display the hold attribute of a jobnet or job even when the jobnet or job has already terminated.

## **(2) JP1/AJS2 - Agent**

- A definition pre-check function has been added for conducting a final check before starting production in the production environment after the unit definitions are migrated from the development environment.
- The following functions have been added to the data collection tool:
  - Specifying a logical host name
  - Filtering the data to be collected
  - Adding types of data that can be collected
- Descriptions of messages have been improved.
- The monitoring interval for linkage with MQ Series can now be specified in seconds.
- All the detailed processes of the event action function can now be stopped to terminate the agent process for the event action function if any of the detailed processes have terminated upon receiving a signal.
- A function has been added that performs a synchronized write when updating event job information or the wait information file.

## **(3) JP1/AJS2 - View**

- Macro variables can now be used during registration for execution to specify information to be passed.
- Judgment jobs can now perform variable judgment.
- A function has been added that suppresses the jobnet executions that follow an abnormally terminated jobnet and that will be started when their start conditions are satisfied.
- The **Add**, **Change Time**, **Execute Immediately**, and **Release Change** options have been added to the JP1/AJS2 - View window.
- The **Paste (Extension)** menu command has been added for copying units and relationship lines at the same time.
- Relationship lines can now be drawn from multiple units to a single job network element.
- When opening the Jobnet Monitor window of JP1/AJS2 - View from JP1/AJS2 Console View, if there is already an activated JP1/AJS2 - View, the window can now be opened in JP1/AJS2 - View.
- The following functions have been added to the data collection tool:
  - Specifying a logical host name

- Filtering the data to be collected
- Adding types of data that can be collected
- Descriptions of messages have been improved.
- The maximum log file size for JP1/AJS2 - View has been increased.
- The maximum log file size for JP1/AJS2 Console View has been increased.
- In JP1/AJS2 - View, log information that previously was output many times in small units can now be output at one time.
- In JP1/AJS2 Console View, log information that previously was output many times in small units can now be output at one time.
- In the Windows version of JP1/AJS2 - View, **Help** has been added to the **Start** menu.

## A.4 Revisions in 07-00

Version 07-00 features the addition of a new program, JP1/AJS2 - Advanced Manager, to enable the use of an embedded database (HiRDB) in a JP1/AJS2 scheduler database.

This section explains the changes in each version from 06-71 to 07-00, on a program-by-program basis.

### (1) *About JP1/AJS2 - Manager*

- A function was provided to temporarily compress JP1/AJS2 and reconfigure the ISAM database (scheduler database and job execution environment database) without stopping active applications.
- ISAM databases can now be reconfigured in parallel.
- The number of scheduler services that can be added has been changed from 9 to 20.
- An option was added for outputting the execution timings of reference commands, such as `ajsshows` and the history of service processing requests from operation commands, as the operation log to the scheduler log.
- The number of logs to keep for a jobnet has been changed from 99 to 999.
- For a cold start of JP1/AJS2, the job execution environment database is deleted so that the startup time of JP1/AJS2 becomes shorter.
- A function is now supported for validating the user profile information in the environment setup for job execution control.
- By setting the number of days that job information is held to 0 days, jobs that terminate abnormally can now be handled by changing the save time.
- The JP1/AJS2 job information deletion can now be suppressed.

- Any event job can now be used in a DNS environment (host name in the FQDN format).
- Event job reception information can now be inherited as macro variables as the parameters of standard jobs and action jobs without having to pay attention to double quotation marks in the inherited information.
- The extended regular expression supported by JP1/Base can now be used in Receive event job monitoring jobs, Monitoring log files jobs, and Monitoring event log jobs according to the JP1/Base settings.
- A function to execute queueless jobs is now supported.

**(2) About JP1/AJS2 - Agent**

- Event job reception information can now be inherited as macro variables of the parameters of standard jobs and action jobs without being aware of double quotation marks in the inherited information.
- A function for executing queueless jobs was supported.
- When JP1/AJS2 - Agent starts, it no longer accesses the authentication server (07-00-/C or later).

**(3) About JP1/AJS2 - View**

- A user profile can now be used to set the JP1/AJS2 - View environment.
- A line feed character can now be inserted at any point in a unit name displayed in the map area of the Jobnet Editor and Jobnet Monitor windows.
- The default values in the dialog box can now be changed.
- Display items (columns) in the following locations can now be selected.
  - List area in the JP1/AJS2 - View window
  - Execution result list in the Daily Schedule window
  - Execution result list in the Monthly Schedule window



---

## B. Changes in 3020-3-S06-04(E)

---

The following table list the changes in this manual (3020-3-S06-04(E)).

*Table B-1: Changes in 3020-3-S06-04(E)*

No.	Location	Changes
1	All	Windows 7 has been added as an OS supported by JP1/AJS3 - View.
2	2.1	The format of the default values for the following environment setting parameters has been changed: <ul style="list-style-type: none"> <li>• SEND_PROCESS_TERMINATED_ABNORMALLY_EVENT</li> <li>• SEND_PROCESS_RESTART_EVENT</li> <li>• SEND_SYSTEM_STARTSTOP_EVENT</li> <li>• SEND_SYSTEM_CHILD_STARTSTOP_EVENT</li> <li>• SEND_SYSTEM_TERMINATED_ABNORMALLY_EVENT</li> <li>• SEND_SYSTEM_RESTART_EVENT</li> </ul>
3	2.2, 2.8	<i>Default value</i> has been added to the description of the SYSLOGCODE environment setting parameter.

B. Changes in 3020-3-S06-04(E)

No.	Location	Changes
4	2.3	<p><i>Recommended value</i> and <i>When the setting takes effect</i> have been added to the description of the following environment setting parameters:</p> <ul style="list-style-type: none"> <li>• IsHA</li> <li>• DeleteFlashOption</li> <li>• PreserveMinute</li> <li>• StartUpDelete</li> <li>• ReceiveFileSizeStatus</li> <li>• LimitReceiveFileSize</li> <li>• ReceiveFileOption</li> <li>• QueuingJobRecoveryTime</li> <li>• ExecutingJobRecoveryTime</li> <li>• MaximumExecJobLogOption</li> <li>• MaximumExecJobLogInterval</li> <li>• PreventChangeJobOrder</li> <li>• EnumJobSaveMemory</li> <li>• ConnectTimeout</li> <li>• CommunicateRetryCount</li> <li>• CommunicateRetryInterval</li> <li>• LeastRecentlyUsed</li> <li>• IsExecFindExecutable</li> <li>• LoadUserProfile</li> <li>• IsAccessTokenCache</li> <li>• DISABLE_FS_REDIRECTION</li> <li>• ENABLE_LONG_EXT</li> <li>• PipeComTimeout</li> <li>• AfterForkPipeTimeout</li> <li>• IsUseWorkPath</li> <li>• IsSigchldDefault</li> <li>• FileAccessPermissionMode</li> <li>• NotifyJobStateInterval</li> <li>• NotifyJobStateCount</li> <li>• ConnectTimeout</li> <li>• CommunicateRetryCount</li> <li>• CommunicateRetryInterval</li> <li>• CommunicateTimeout</li> <li>• MacroOptionReplaceMode</li> </ul>
5	2.3	<p><i>Recommended value</i> has been added to the description of the following environment setting parameters:</p> <ul style="list-style-type: none"> <li>• AutoCreateExecJobs</li> <li>• AutoCreateMaxJobs</li> <li>• AutoCreateWarnJobs</li> <li>• AutoCreatePriority</li> </ul>

No.	Location	Changes
6	2.4	<p>The following environment setting parameters have been added:</p> <ul style="list-style-type: none"> <li>• FixedHostnameForAgent</li> <li>• NotificationConstantRetry</li> <li>• NotificationRetryInterval</li> <li>• NotificationRetryCount</li> <li>• ClientConnectTimeout</li> </ul>
7	2.6	<p>The description of the following environment setting parameters has been changed:</p> <ul style="list-style-type: none"> <li>• ClientConnectTimeout</li> <li>• ClientRetryInterval</li> <li>• ClientRetryCount</li> </ul>
8	2.7	<p>The description in <i>Default value</i> for the following environment setting parameters has been changed:</p> <ul style="list-style-type: none"> <li>• QLMANCHARCODE</li> <li>• AJSQL_CJOBMAX</li> <li>• AJSQL_CJOBWAITMAX</li> </ul>
9	2.7	<p><i>Recommended value</i> and <i>When the setting takes effect</i> have been added to the description of the following environment setting parameters:</p> <ul style="list-style-type: none"> <li>• AJSQL_NOATTACHREQ</li> <li>• AJSQL_EXECCURRENTSCRIPT</li> <li>• AJSQL_VARDQUOTEADD</li> <li>• AJSQL_CONNECTTIMEOUT</li> <li>• AJSQL_CONNECTCOUNT</li> <li>• AJSQL_CONNECTINT</li> <li>• DISABLE_FS_REDIRECTION</li> <li>• ENABLE_LONG_EXT</li> <li>• AJSQL_CREATEWINDOWSTATION</li> <li>• AJSQL_EXECLOG</li> <li>• AJSQL_EXECLOG_FTPPATH</li> <li>• AJSQL_ATTACH</li> <li>• AJSQL_EXECLOG_AGTPATH</li> <li>• AJSQL_CLUSTERREQ</li> <li>• AJSQL_CJOBMAX</li> <li>• AJSQL_CJOBWAITMAX</li> </ul>
10	2.7	<p><i>Recommended value</i>, <i>When the setting takes effect</i>, and <i>Specifiable values</i> have been added to the description of the AJSQL_TRACELOGFILE environment setting parameter.</p>
11	2.7	<p><i>Specifiable values</i> and <i>Default value</i> have been added to the description of the AJSQL_AGTWORKPATH environment setting parameter.</p>
12	2.9	<p><i>Recommended value</i> and <i>When the setting takes effect</i> have been added to the description of the following environment setting parameters:</p> <ul style="list-style-type: none"> <li>• SYSLOGJOBMSG</li> <li>• MACROCHANGEFAIL</li> </ul>

## C. Glossary

---

### **abnormal end**

A jobnet ends abnormally if one of the processes defined in the jobnet fails to execute properly. The jobnet is interrupted at that point and subsequent processes are not executed.

A job ends abnormally if it fails to execute properly. The process is interrupted at that point.

The embedded database system ends abnormally when an error causes its status to change from active to stopped or paused, without any intervention by the user. For details, see *D. How the Embedded Database Operates* in the manual *Job Management Partner 1/Automatic Job Management System 3 Troubleshooting*.

### **abnormal threshold**

A value that is compared with a job's return code to evaluate whether the job ended normally or abnormally.

### **action job**

A job that sends email, or sends events reporting the system status to JP1/ IM or the HP NNM.

### **agent host**

A host that executes jobs on request from a manager host. JP1/AJS3 - Agent must be installed on the agent host, or since JP1/AJS3 - Manager also provides JP1/AJS3 - Agent functionality, JP1/AJS3 - Manager might be installed on the agent host.

The agent host executes the job on receipt of a job request from the manager host. At completion of the job, the agent host receives the execution result (return value) of the executable file and forwards it to the manager host.

### **AJS3 unit monitored object**

An object for monitoring the status of root jobnets in JP1/AJS3. By defining the monitoring conditions in this object, you can then switch to monitoring mode and monitor the root jobnets.

### **AJSPATH**

An environment variable for defining the paths used by JP1/AJS3. When this environment variable is defined, you do not need to specify the full path when specifying a jobnet name in a command.

### **backup box**

A directory or a folder for storing backup files.

**backup file**

A file containing the units defined in JP1/AJS3.

**base day**

A date specified as the starting day of the month in the calendar information.

**base time**

The time that marks when a day ends and the next day begins in a JP1/AJS3 system. For example, if 8:00 a.m. is set as the base time, the previous day is regarded as lasting until 7:59 a.m.

**calendar information**

Information about open days and closed days for jobnet execution. You can define calendar information separately for each job group. The calendar information specifies the days on which jobnets in the job group can and cannot be executed. (When the processing cycle falls on a closed day, the jobnet can be executed on another day if a substitute schedule is defined.) For open days, you can specify the base day, base month, and base time.

**closed day**

A day on which jobnets are not executed. However, if **Execute without shift** is specified, the jobnet will be executed on that closed day.

**cluster system**

A system configured as multiple linked server systems, designed to continue operation even if one system fails. If a failure occurs in the server currently executing applications (primary node), the other standby server (secondary node) takes over and continues processing the applications. Therefore, a cluster system is also referred to as a *node switching system*.

The term *cluster system* can also mean load balancing based on parallel processing. In this manual, however, *cluster system* refers only to node-switching functionality for preventing interruption of application processing.

**common user profile**

A file containing the environment settings for JP1/AJS3 - View, accessible to all JP1 users. The system administrator saves the common user profile in JP1/AJS3 - Manager. JP1 users can download this file, enabling the same JP1/AJS3 - View environment to be set for all JP1 users.

A common user profile is useful when a large number of JP1 users will be using JP1/AJS3 - View in the same environment.

**compatible ISAM configuration**

A system configuration in which JP1/AJS3 information is managed exclusively by the

ISAM database.

This configuration is offered to help users migrate from JP1/AJS2 version 8 or earlier. It can restrict to the same degree as in previous versions, the use of resources such as hard disk and memory. However, from version 9 only a subset of the new features offered is provided.

**correlation ID**

Information for identifying sent and received messages. The correlation ID is received in the character code set specified by the sender.

**custom job**

A predefined job for executing a task with a specific purpose. JP1/AJS3 provides standard custom jobs such as file transfer and job requests to a mainframe. In addition, you can register your own frequently used jobs as custom jobs. When registering a custom job, you can represent it by creating an icon with a special shape and design, and you can create a dialog box for entering job information.

To use a custom job, the requisite program for the job must be installed.

**Daily Schedule window**

A window that displays each day's execution schedules, execution status, and execution results.

**default queue**

A queue created in an agent host for executing jobs. You must always create a default queue.

When you submit a job for execution, if you specify an agent host name as the destination, the job will be submitted to the default queue of the specified agent host.

**dependent job**

A job executed when the judgment result of a judgment job is true.

**dependent jobnet**

A jobnet executed when the judgment result of a judgment job is true.

**embedded database**

The standard database of JP1/AJS3. An embedded database offers high reliability, and is well suited to large-scale systems that handle large quantities of information.

**embedded database administrator (database administrator)**

A user authorized to assign and cancel various permissions for an embedded database (a user with DBA permissions).

Database administrators are managed within an embedded database.

**embedded database operation commands**

A generic term for commands whose name begins with `ajsembddb`.

**embedded database service**

A service that provides the environment for using the embedded database in Windows. This service must be started before you can use the embedded database. The name of the embedded database service is `JP1/AJS3 Database setup-identifier`.

**embedded database system administrator**

The owner of an embedded database practical directory and embedded database file system areas (data area and system area). The embedded database system administrator can execute commands for an embedded database.

The OS manages embedded database system administrators.

**end with warning**

A status indicating that a jobnet finished, but some of the processes defined in the jobnet were executed incorrectly. The jobnet continues to the end without interruption.

This ending method is used when an error is not so serious as to terminate the jobnet.

**environment setting parameter**

A parameter for defining the information required to operate JP1/AJS3, written in an environment settings file. With these parameters, you can specify the directory in which information about JP1/AJS3 units is stored, whether to output syslog messages, and other such preferences.

**environment settings file**

A file containing the settings required to operate JP1/AJS3, such as the scheduler service environment and job execution environment.

**event**

A specific event, such as email reception or file update, that occurred in the system. Events can be used to start a job or jobnet, and can be monitored using an event job.

**event job**

A job that monitors specific events occurring in the system. When an event job is initiated, it starts monitoring for file updates, incoming messages, or other specified events.

**execution agent**

The logical name of an agent host that executes jobs or jobnets. Based on the agent information defined in the manager host, the manager maps the execution agent specified in the job or jobnet to the physical host name of the agent host, and distributes the job or jobnet accordingly.

**execution agent group**

A group of execution agents configured to realize load distribution. The manager distributes jobs among the execution agents according to their assigned priorities.

**execution ID**

A number assigned to an execution schedule of the uppermost jobnet.

**execution-locked resource**

A means of preventing multiple jobs from executing at the same time, by specifying the same resource name (execution-locked resource name) for each job.

**fixed execution registration**

A method of registering a jobnet so that it starts and runs at a predetermined date and time calculated by the system from schedule definitions.

**fixed schedule**

A schedule set by absolute times when a jobnet is registered for fixed execution.

**HP NNM**

A suite of integrated network management tools from Hewlett-Packard Co. for managing network configuration, performance, and failures.

**immediate execution registration**

A method for starting and processing a jobnet immediately after registering it for execution.

**ISAM database**

The database that manages the execution environment for QUEUE jobs and submit jobs. Data is indexed using the Indexed Sequential Access Method (ISAM) and is managed in the database. The ISAM database is provided as standard with JP1/Base.

**job**

A group of commands, shell scripts, or Windows executable files.

**job execution environment**

A job execution environment consists of a JP1/AJS3 manager and agents.

The job execution environment for the manager is used to manage the definition information for execution agents (such as the maximum number of concurrently executable jobs and job transfer restriction status), job distribution method, and job execution results.

The job execution environment for the agent is used mainly to manage how a job is executed.



These job execution environments are managed by using a database and environment setting parameters.

When QUEUE jobs and submitted jobs are used, the ISAM database and environment setting parameters are used as the job execution environment for the QUEUE jobs and submitted jobs.

Note that queueless jobs are managed in the queueless job execution environment.

**job group**

A folder for classifying and managing jobnets.

**job network element**

The generic term for these elements is *unit*.

**jobnet**

A set of jobs associated in execution order. When a jobnet is executed, the jobs in the jobnet are automatically executed in their predetermined order.

**jobnet connector**

A unit for controlling the execution order of root jobnets. A jobnet connector establishes connections between root jobnets and controls their execution order by having connected generations wait for their counterparts to start or finish.

**Jobnet Editor window**

A window in which you can create new jobnets or edit existing jobnets.

**Jobnet Monitor window**

A window that displays the execution status or detailed execution results of jobnets or jobs. You can manipulate jobnets or jobs in this window.

**JP1 event**

Event information that is reported to JP1/Base when an event occurs in the system. JP1 events are reported to other systems via JP1/Base.

**JP1 permission level**

A name that indicates the operations that a JP1 user is allowed to perform on management targets (resources) defined in JP1/AJS3, including applications and events. Use JP1/Base to define JP1 permission levels.

**JP1 resource group**

A name given to a specific JP1/AJS3 unit for controlling access by JP1 users to that unit.

### **JP1 user**

A user designation for using JP1/AJS3 or JP1/IM - Manager. Each JP1 user is registered in the authentication server, which controls the user's access to management targets (resources).

### **JP1/AJS3 - Definition Assistant**

This program allows you to register a large amount of JP1/AJS3 definition information edited using an Excel template into a manager host, or to retrieve JP1/AJS3 definition information from a manager host to an Excel template. The Excel templates provided by JP1/AJS3 - Definition Assistant are called *definition management templates*. With a definition management template in the spreadsheet format, you can enter or edit definition information efficiently by using automatic filling, automatic filtering, and other Excel functionalities.

### **JP1/AJS3 Console Agent**

A JP1/AJS3 component that regularly monitors the status of objects (root jobnets) on the local host, specified in JP1/AJS3 Console Manager. Any change in status is notified to JP1/AJS3 Console Manager.

### **JP1/AJS3 Console Manager**

A JP1/AJS3 component that stores definitions about monitored objects defined in JP1/AJS3 Console View, and gets status information about monitored objects by issuing requests to JP1/AJS3 Console Agent.

### **JP1/AJS3 Console View**

A JP1/AJS3 component that allows you to define objects to be monitored, using a graphical user interface. The definitions are stored in JP1/AJS3 Console Manager. Using JP1/AJS3 Console View, you can view and monitor the status of target objects notified by JP1/AJS3 Console Agent to JP1/AJS3 Console Manager. You need to log in to JP1/AJS3 Console Manager before using JP1/AJS3 Console View.

### **JP1/AJS3 for Enterprise Applications**

A program that allows you to control jobs in an R/3 system from another system. You can submit, delete, and monitor R/3 jobs.

R/3 jobs can be executed automatically from JP1/AJS3 if you register them as custom jobs for JP1/AJS3 for Enterprise Applications when you define a JP1/AJS3 jobnet.

JP1/AJS3 for Enterprise Applications is the successor to JP1/Application Manager for R/3.

### **JP1/AJS2 for Oracle E-Business Suite**

A program that allows you to access Oracle E-Business Suite from another system and to request concurrent execution of applications.

Requests for concurrent execution can be issued from JP1/AJS3 if you register the requests as custom jobs for JP1/AJS2 for Oracle E-Business Suite when you define a JP1/AJS3 jobnet.

Using JP1/AJS3's schedule definition facility, you can specify the processing cycles and the execution dates of concurrent requests.

JP1/AJS2 for Oracle E-Business Suite is the successor to JP1/Application Manager for Oracle E-Business Suite.

### **JP1/Base**

A program that provides the event service function. JP1/Base allows you to control the order in which services start, and it lets you send and receive JP1 events. JP1/Base is a prerequisite program for JP1/IM and JP1/AJS3. When JP1/IM is deployed in a system with JP1/AJS3, JP1/Base provides functionality for restricting operations by JP1 users.

### **JP1/FTP**

A program for performing file transfer tasks efficiently, including file transfer/reception linked to application execution, scheduled file transfer, and automated program execution following file reception. JP1/FTP supports monitoring of transfer status, enhancing file transfer reliability.

### **JP1/IM**

A program for centrally monitoring a distributed system. Using the windows in JP1/IM - View, the system administrator can monitor JP1 events, which provide information about job execution status or problems in the distributed system.

### **JP1/NQSEXEC**

A program for executing routine batch processing on a distributed system and for running batch jobs efficiently.

### **JP1/OJE for Midrange Computer**

A program for submitting batch jobs to AS/400 from a Windows or UNIX host, or for submitting batch jobs from AS/400 to a Windows or UNIX host.

### **JP1/OJE for VOS3**

A program that links with JP1/AJS3 for executing and monitoring batch jobs between a Windows or UNIX system and a mainframe (VOS3).

### **JP1/Script**

A program for creating and executing scripts (batch files) that control jobs on Windows. Job operation can be automated by linking JP1/Script with JP1/AJS3.

### **JP1/Software Distribution**

A general term for a system that distributes software and manages clients using batch operations over a network.

By linking with JP1/AJS3 using the JP1/Software Distribution command interface, the user can automate software distribution and other tasks.

### **judgment job**

A job that executes a dependent job or jobnet if the judgment result of a specified condition is true.

### **judgment value**

A value for evaluating whether a job ended normally or abnormally.

### **kill**

To forcibly terminate a unit being executed.

When the root jobnet is killed, all the jobs being executed are killed and the jobnets are terminated.

### **list file**

A file containing a list of extracts from sent and received mail.

### **logical host**

A logical server that provides the JP1 execution environment for running a cluster system. If a failure occurs on the primary node, the logical host is switched to the secondary node.

Each logical host has a unique IP address. At failover, the secondary node inherits the IP address. Thus, if the physical server fails, clients can access the secondary node using the same IP address. To the clients, it appears that one server is operating continuously.

### **macro variable**

A variable defined for a succeeding job for referencing information received in an event. By defining a macro variable name in an event job, you can pass the event information to a succeeding job or jobnet.

Specify macro variables in the form ?AJS2xxxxxxxx? : *name-of-information-to-pass*.

### **mail filtering application**

A program or a shell script that converts email formats.

A mail filtering application is required to convert the character set when exchanging email in formats other than RFC822.

**mail receipt parameter file**

A file containing the mail receipt monitoring parameters defined by the user. The file extension is `.prm`. This file is created automatically when the user defines a Receive Email Event job.

**mail send parameter file**

A file containing the mail send parameters defined by the user. The file extension is `.prm`. This file is created automatically when the user defines a Send Email Action job.

**manager host**

A host that manages jobnet definitions and schedule information in a database, and requests agent hosts to execute jobs. You must install JP1/AJS3 - Manager on the manager host.

The manager host creates jobnet execution schedules from the defined schedule information. At jobnet run time, the manager host starts the executable files defined as jobs, forwards the job definitions to an agent host, and requests the agent host to execute the jobs. When execution completes, the execution result is received by the agent host and the database is updated. Based on the updated information, the manager host executes a succeeding job or schedules the next execution of the jobnet.

**manager job group**

A job group for monitoring JP1/AJS3 - Manager applications from another JP1/AJS3 - Manager.

**manager jobnet**

A jobnet for monitoring JP1/AJS3 - Manager applications from another JP1/AJS3 - Manager.

**MAPI (Messaging Application Programming Interface)**

The standard messaging API for Windows.

**max. shiftable days**

A set number of days within which to shift the next scheduled execution date when the recalculated date falls on a closed day.

**maximum number of concurrently executable jobs**

The maximum number of jobs that can be executed concurrently.

**message ID**

One item in an MQSeries message descriptor. Message IDs are stored in the character set specified by the sender. They can be used as storage locations to help identify messages.

**MIME (Multipurpose Internet Mail Extensions)**

An extended SMTP function used for sending and receiving non-ASCII data.

MIME specifies various procedures, such as how data is to be transmitted between email systems, and the format of control messages for email transfer.

**Monthly Schedule window**

A window that displays each month's execution schedules and execution results.

**nested jobnet**

A jobnet defined within another jobnet.

**node switching system**

See *cluster system*.

**normal end**

A normal end of a jobnet occurs when all the processes defined in the jobnet have executed correctly and the jobnet has completed.

A normal end of a job occurs when the job has executed correctly.

**open day**

A day when jobnets run.

**physical host**

An environment unique to each of the servers (nodes) in a cluster system. When a secondary node takes over from the primary node, the environment of the physical host remains unchanged and is not inherited by the other server.

**planned execution registration**

A method of registering a jobnet so that it starts and executes according to schedule definitions.

**planning group**

A unit for switching execution among multiple root jobnets in a planned manner. Directly under a planning group, you can create a number of root jobnets, each defined differently and with differing execution schedules. This enables the root jobnets to be executed automatically in turn, according to the set schedules.

**preceding job**

A job executed immediately before another job or jobnet.

**preceding jobnet**

A jobnet executed immediately before another job or jobnet.

**processing cycle**

The interval between one execution start date and the next execution start date of a jobnet. By defining a processing cycle, you can execute a jobnet at regular intervals.

**queue**

An area for temporarily keeping jobs registered for execution. Jobs are submitted to the queue in order of registration, and are sequentially transferred for execution to the agent connected to that queue.

The queue controls the number of jobs that the agent executes concurrently, thereby preventing any degradation in performance caused by a large number of jobs being executed at the same time.

**queueless job**

A job transferred directly from the manager to an agent host for execution, without using a queue. Queueless jobs simplify processing because they are not managed in a queue by the job execution control. As a result, they offer better performance than ordinary queued jobs, allowing more jobs to be executed within a given period of time. However, job execution control functions such as execution agent names and execution agent groups are not available with queueless jobs.

You can define PC jobs and Unix jobs in a jobnet as queueless jobs by specifying **Queueless Agent** as the execution service.

Unless otherwise indicated, the descriptions in this manual apply to jobs for which **Standard** is specified as the execution service.

**queueless job execution environment**

A queueless job execution environment consists of execution environments for the JPI/AJS3 manager (scheduler service and queueless file transfer service) and queueless agents (queueless agent services). The execution of queueless jobs is managed by using the environment setting parameters for the job execution environment.

Note that the job execution environment must be set up by using the `ajsqlsetup` command before environment setting parameters are set.

**queuing job**

A job submitted directly to a queue and waiting to be executed.

**recovery job**

A job to be executed when a job or jobnet ends abnormally.

**recovery jobnet**

A jobnet to be executed when a job or jobnet ends abnormally.

### **schedule by days from start**

A schedule defined for recalculating the next scheduled execution date, using as the base day the next scheduled execution date determined from the execution start time, processing cycle, and substitute schedule for closed days.

### **schedule information file**

A text file containing schedule information parameters, entered by command when setting fixed execution registration for a jobnet.

### **schedule rule**

Jobnet information such as execution start time and processing cycle. Up to 144 schedule rules can be defined for a single jobnet.

### **scheduler service**

A service that manages the schedules for jobnet execution, and executes processes according to those schedules. Each scheduler service manages all the units in the root job group whose name matches the scheduler service name.

Multiple scheduler services can be activated in a single manager. This allows root job groups to be managed individually. For example, if you start a separate scheduler service for each application, each scheduler service can run its specific application (jobnet and jobs) in parallel, independently of the other scheduler services.

### **shift days**

A set number of days within which to determine a substitute date when the next execution date falls on a closed day.

### **shutdown status**

A situation in which a jobnet fails to start or end due to an error, and the execution status or the next scheduled execution cannot be verified. If this happens, you must cancel and then re-register the jobnet for execution.

### **SMTP (Simple Mail Transfer Protocol)**

A protocol, generally used in UNIX networks, for transferring ASCII data by TCP/IP between heterogeneous systems.

### **standard configuration**

A system configuration in which JP1/AJS3 information is managed by the embedded database.

Unless otherwise indicated, the descriptions in this manual relate to a system in a standard configuration.

Note that the ISAM database is still used to store some information related to QUEUE jobs and submit jobs.



**start condition**

A definition of the conditions under which a jobnet starts when the jobnet is driven by a specific event.

**subject**

A character string written in the subject line of an email message. Non-ASCII characters are supported in JP1/AJS3, but might not be supported in connected email systems.

**submit**

To request the system to execute a job.

**submitted job**

A standard job registered using the `jpqjobs` command.

**substitute schedule**

A means of executing a jobnet on a different day when the next execution date, determined from the jobnet schedule, falls on a closed day.

**succeeding job**

A job executed immediately after another job or jobnet.

**succeeding jobnet**

A jobnet executed immediately after another job or jobnet.

**suspend**

To suppress the execution of the root jobnet and lower units.

When you change a definition under a root jobnet that has been registered for execution, you should suspend the root jobnet to prevent erroneous operation such as the execution control processing running with the old definition. By suspending the root jobnet, the redefinition processing can be synchronized with the execution control processing.

**threshold**

A value for evaluating the termination status of a job. You can define an abnormal threshold and a warning threshold for each job.

**timeout period**

A time interval after which an executed job is forcibly terminated if there was no response from the job or if it failed to complete during the specified period.

**TP1/Server Base**

Software for distributing transaction processing and server processing in an open

system. JP1/AJS2 uses TP1/Server Base transaction processing.

**unit**

A generic term for any job network element.

**unit definition parameter file**

A text file containing unit definition parameters, entered by command when defining the units.

**unit ID**

A unique number allocated to a unit.

**warning threshold**

A value for evaluating whether a job ended with a warning.

**Windows Messaging**

A facility that provides an interface for sending and receiving email. Using Windows Messaging, you can manage, access, and share a variety of information such as data received from an online service.

---

# Index

---

## Symbols

\_AgentStartStopResolveMode 176

## A

abbreviations defined iv  
abnormal end 252  
abnormal threshold 252  
action control environment  
    setting up 172  
action job 252  
AfterForkPipeTimeout 154  
agent host 252  
AJS3 unit monitored object 252  
AJSBKUROOT 59  
AJSCHARCODE 57  
AJSCHK\_CHARCODE 198  
AJSCHK\_CHECKFILE 195  
AJSCHK\_LOGDIR 195  
AJSCHK\_LOGSIZE 196  
AJSCHK\_TRACELOGFILE 197  
AJSDBDIRECTOR 91  
AJSDBTYPE 91  
AJSINETDLOGSIZE 37  
AJSLOG 65  
AJSLOGDIR 11, 94  
AJSLOGFILE1 44  
AJSLOGFILE2 45  
AJSLOGOUTPUTDEST 43  
AJSLOGOUTPUTEXTEND 48  
AJSLOGOUTPUTYEAR 47  
AJSPATH 252  
AJSPRINTNETSCHPRF 82  
AJSQL\_AGTWORKPATH 220  
AJSQL\_ATTACH 218  
AJSQL\_CHARCODE 206  
AJSQL\_CJOBMAX 221  
AJSQL\_CJOBWAITMAX 222  
AJSQL\_CLUSTERREQ 220

AJSQL\_CONNECTCOUNT 211  
AJSQL\_CONNECTTIMEOUT 211  
AJSQL\_CREATEWINDOWSTATION 213  
AJSQL\_EXECCURRENTSCRIPT 208  
AJSQL\_EXECLOG 214  
AJSQL\_EXECLOG\_AGT\_PATH 219  
AJSQL\_EXECLOG\_FTTPATH 214  
AJSQL\_JOBMAX 206  
AJSQL\_JOBWAITMAX 207  
AJSQL\_LOADUSERPROFILE 210  
AJSQL\_LOGFILE 215  
AJSQL\_LOGSIZE 216  
AJSQL\_NOATTACHREQ 208  
AJSQL\_STATFILE 216  
AJSQL\_STATSIZE 217  
AJSQL\_TRACELOGFILE 209  
AJSQL\_VARDQUOTEADD 210  
AJSSERVICEID 50  
AJSSYS DIR 10, 93  
AJSSYSLOG 61  
AJSTMPDIR 57  
AlertContentJob 121  
All Users 164  
AUTHLOG 39  
AUTHSYSLOG 39  
AutoCreate 135  
AutoCreateExecJobs 136  
AutoCreateMaxJobs 137  
AutoCreatePriority 138  
AutoCreateWarnJobs 137  
AUTORESTARTCOUNT 40  
AUTOSTART 49

## B

BACKGROUNDLEAVE 84  
backup box 252  
backup file 253  
base day 253  
base time 253

BlockadeTimeoutInterval 180

## C

calendar information 253  
 CHARCODE 227  
 ClientBindFlag 182  
 ClientConnectTimeout 200, 190  
 ClientRetryCount 201  
 ClientRetryInterval 201  
 closed day 253  
 cluster system 253  
 ColdStartMode 119  
 COMMANDEVENT 87  
 common user profile 253  
 CommunicateRetryCount 132, 161, 165, 169  
 CommunicateRetryInterval 133, 161, 166, 170  
 CommunicateTimeout 167  
 communication control environment  
   setting up 199  
 ConnectTimeout 132, 160, 165, 168  
 conventions  
   abbreviations iv  
   diagrams viii  
   fonts and symbols ix  
   KB, MB, GB, and TB xii  
   mathematical expressions xi  
   meaning of folder and directory xii  
   meaning of member of Administrators  
   group xii  
   version numbers xii  
 correlation ID 254  
 custom job 254

## D

Daily Schedule window 254  
 database administrator 254  
 DatabasePath 113  
 DATADIRECTORY 229  
 default queue 254  
 defaults  
   installation folders of JP1/AJS3 for  
   Windows xiii  
 DEFAULTSERVICENAME 28  
 definition keys

format 2

DeleteFlashOption 116  
 dependent job 254  
 dependent jobnet 254  
 diagram conventions viii  
 directory  
   term defined xii  
 DISABLE\_FS\_REDIRECTION 143, 212  
 DNSEstablish 178

## E

embedded database  
   administrator, glossary definition 254  
   glossary definition 254  
   operation commands, glossary definition 255  
   service, glossary definition 255  
   system administrator, glossary definition 255  
 ENABLE\_LONG\_EXT 144, 213  
 ENABLEOPERATION 231  
 end with warning 255  
 EnumJobSaveMemory 130  
 environment  
   environment setting parameters 3  
   setting up system management environment 4  
 environment setting parameters  
   for communication control 199  
   for event action control 172  
   for job execution environment setting 99  
   for JP1/AJS3 Console environment setup 223  
   for scheduler service environment setup 18  
   for system management 4  
   format 2  
   glossary definition 255  
   JP1/AJS3 shared information 233  
   queueless job execution environment  
   setup 203  
   settings for JP1/AJ3 definition precheck  
   function 194  
 environment settings file 255  
 event 255  
 event control environment  
   setting up 172  
 event job 255  
 EVENTRETRY 33

EventSequential 189  
 EvJobExecContinue 179  
 EvjobInffile 184  
 EVProcessHA 188  
 EXECDEFER 78  
 ExecutingJobChangeStatus 131  
 ExecutingJobRecoveryTime 126  
 execution agent 255  
 execution agent group 256  
 execution ID 256  
 execution-locked resource 256

## F

FGRECONLMT 90  
 FileAccessPermissionMode 157  
 FilewatchinfContinue 186  
 FileWriteMode 177, 187  
 fixed execution registration 256  
 fixed schedule 256  
 FixedHostnameForAgent 179  
 FlashOption 116  
 folder  
     term defined xii  
 font conventions ix  
 format  
     environment setting parameters 2

## G

GB meaning xii  
 glossary 252  
 GWMAXCONNECTION 95  
 GWPROCESHA 95  
 GWRESTARTCOUNT 96

## H

HIDEOTHERLHOST 40  
 HLOGDLOG 15  
 HLOGSYSLOG 15  
 HNTRLOGLEVEL 60, 228  
 HOSTLOGFILE1 12  
 HOSTLOGFILE2 13  
 HOSTLOGHEADER 14  
 HOSTLOGOUTPUTYEAR 13

HOSTLOGSIZE 11  
 HowUseInfWhenHA 185  
 HP NNM 256  
     term defined xvii

## I

immediate execution registration 256  
 INFOLOG 73  
 InformationWhenShutDown 186  
 installation folders  
     default for JP1/AJS3 for Windows xiii  
 IPC\_CONNECTTIMEOUT 231  
 IPC\_LOCALTIMEOUT 32  
 IPC\_TIMEOUT 31, 225  
 IPCRETRYCOUNT 33, 226  
 IPCRETRYINTERVAL 32, 226  
 IsAccessTokenCache 142  
 ISAM  
     compatible ISAM configuration, glossary  
     definition 253  
     database, glossary definition 256  
 ISAMWRITEMODE 50  
 IsCacheCmdSearchPath 155  
 IsExecFindExecutable 141  
 IsHA 113, 140, 168, 170  
 IsLimitCoreSize 144  
 IsLimitCpuTime 150  
 IsLimitDataSize 146  
 IsLimitFileSize 147  
 IsLimitMemorySize 148  
 IsLimitNoFile 152  
 IsLimitStackSize 149  
 IsLimitWorkSize 151  
 IsSigchldDefault 157  
 IsUseWorkPath 156

## J

job 256  
 job execution environment 256  
     setting up 97  
 job group 257  
 job network element 257  
 JOBDELAYWARNMSG 89  
 JOBEXECIPCBUFSIZE 83

JOBINFDIR 58  
 JOBLOG 67  
 jobnet connector 257  
 Jobnet Editor window 257  
 Jobnet Monitor window 257  
 jobnets  
     glossary definition 257  
 JOBSTATUSPORT 78  
 JOBSYSLOG 63  
     output messages 235  
 JP1 event 257  
 JP1 permission level 257  
 JP1 resource group 257  
 JP1 user 258  
 JP1-user-name 164  
 JP1/AJS2 for Oracle E-Business Suite 258  
 JP1/AJS3 - Definition Assistant 258  
 JP1/AJS3 Console Agent 258  
 JP1/AJS3 Console environment  
     setting up 223  
 JP1/AJS3 Console Manager 258  
 JP1/AJS3 Console View 258  
 JP1/AJS3 definition pre-check function  
     setting up 194  
 JP1/AJS3 for Enterprise Applications 258  
 JP1/AJS3 shared information  
     setting up 233  
 JP1/Base 259  
 JP1/FTP 259  
 JP1/IM 259  
 JP1/NQSEXEC 259  
 JP1/OJE for Midrange Computer 259  
 JP1/OJE for VOS3 259  
 JP1/Script 259  
 JP1/Software Distribution 260  
 JSQL\_CONNECTINT 212  
 judgment job 260  
 judgment value 260

## K

KB meaning xii  
 kill 260

## L

LARGEFILEUSE 234  
 LeastRecentlyUsed 138  
 LimitCoreSize 145  
 LimitCpuTime 151  
 LimitDataSize 146  
 LimitFileSize 147  
 LimitMemorySize 148  
 LimitNoFile 153  
 LimitReceiveFileSize 124  
 LimitStackSize 149  
 LimitWorkSize 152  
 list file 260  
 LoadUserProfile 141  
 LOGDLOG 46  
 LOGDSYSLOG 46  
 LOGFILENUM 16  
 LOGHEADER 72  
 logical host 260  
 LOGININFOALL 70  
 LOGONSHMAX 36  
 LogonUserRetryCount 162  
 LogonUserRetryInterval 163  
 LOGSIZE 16, 44

## M

macro variable 260  
 MACROCHANGEFAIL 236  
 MacroOptionReplaceMode 167  
 MacVarDQuotation 178  
 mail filtering application 260  
 mail receipt parameter file 261  
 mail send parameter file 261  
 manager host 261  
 manager job group 261  
 manager jobnet 261  
 MAPI 261  
 MASTERDABEND 42  
 mathematical expression conventions xi  
 max. shiftable days 261  
 maximum number of concurrently executable  
 jobs 261  
 MaximumAgent 134  
 MaximumContentJob 120

MaximumExecJobLogInterval 128  
 MaximumExecJobLogOption 128  
 MaximumQueue 119  
 MaximumResource 139  
 MAXSAVEGEN 80  
 MAXSESSION 37, 224  
 MB meaning xii  
 member of the Administrators group  
     term defined xii  
 message ID 261  
 messages  
     output based on SYSLOGJOBMSG and  
     JOBSYSLOG 235  
 MIME 262  
 MONLOG 34  
 MONSYSLOG 38  
 Monthly Schedule window 262

## N

nested jobnet 262  
 NETLOG 65  
 NETSYSLOG 62  
 NNM linkage  
     supported products xvii  
 node switching system 262  
 NONRELOADHOLDING 87  
 normal end 262  
 NotifyJobStateCount 160  
 NotifyJobStateInterval 159  
 NotificationConstantRetry 181  
 NotificationRetryCount 182, 191  
 NotificationRetryInterval 181, 191

## O

ObserveInterval 134  
 online manual  
     contents xiii  
 OPELOG 68  
 open day 262  
 OVERSCHEDULE 76

## P

physical host 262

PipeComTimeout 154  
 planned execution registration 262  
 planning group 262  
 preceding job 262  
 preceding jobnet 262  
 PreserveMinute 117  
 PreserveTerm 114  
 PreventChangeJobOrder 129  
 processing cycle 263

## Q

queue 263  
 queueless job 263  
 queueless job execution environment 263  
     setting up 203  
 QUEUELESSMULTIREQ 79  
 queuing job 263  
 QueuingJobRecoveryTime 126

## R

RDBAUTHID 52  
 RDBCHECKINTERVAL 53  
 RDBCONNECTWAITTIME 56  
 RDBHOST 54  
 RDBIPC 55  
 RDBPASSWORD 53  
 RDBPORT 54  
 RDBRECVMEMSIZE 56  
 RDBSENDMEMSIZE 55  
 RDBUSER 52  
 ReceiveFileOption 125  
 ReceiveFileSizeStatus 122  
 RECONNECTINTERVAL 229  
 recovery job 263  
 recovery jobnet 263  
 RecvTimeout 192  
 REFLOG 71  
 regular expressions available in JP1/AJS3 xvii  
 REMNETSERVICENAME 28  
 REQDAGTRECONNECTTIMEOUT 86  
 REQDAGTREQCONNECTTIMEOUT 85  
 RESTARTCLRTIME 41  
 RetryAgtStartNotification 190  
 REUSELOGON 35

## Index

### revisions

07-00 247  
07-50 244  
08-00 243  
09-00 240

RJCUSE 89

ROOTJOBNETSCHEDULERANGE 74

## S

SAVEGENTYPE 90

schedule by days from start 264

schedule information file 264

schedule rule 264

scheduler service 264

scheduler service environment

setting up 18

SEND\_PROCESS\_RESTART\_EVENT 7

SEND\_PROCESS\_TERMINATED\_ABNORMAL  
LY\_EVENT 6

SEND\_SYSTEM\_CHILD\_STARTSTOP\_EVENT 8

SEND\_SYSTEM\_RESTART\_EVENT 9

SEND\_SYSTEM\_STARTSTOP\_EVENT 7

SEND\_SYSTEM\_TERMINATED\_ABNORMAL  
LY\_EVENT 9

SESSIONTIMEOUT 49, 226

shift days 264

shutdown status 264

SMTP 264

standard configuration 264

StandardTime 115

start condition 265

STARTMODE 75

StartUpDelete 117

subject 265

submit 265

SUBMITRETRYINTERVAL 83

submitted job 265

substitute schedule 265

succeeding job 265

succeeding jobnet 265

SUPPRESS 77

suspend 265

symbol conventions ix

syntax

environment setting parameters 2

syntax conventions x

SYSLOGCODE 61, 227

SYSLOGJOBMSG 234

output messages 235

## T

TABLERNAMEPOSTFIX 51

TABLERNAMEPREFIX 51

TB meaning xii

threshold 265

timeout period 265

TP1/Server Base 265

TRACELOGFILE 29, 230

## U

unit 266

unit definition parameter file 266

unit ID 266

UNITDEFINERELoad 79

## V

variable-name 163

version number conventions xii

version revisions 240

VIEWSTATUSRANGE 74

VRSHIFT\_IMMINT 29

VRSHIFT\_INTRERUN 30

## W

WaitInfFileOutDir 175, 183

warning threshold 266

Windows Messaging 266

WorkPath 112, 140



---

# Reader's Comment Form

---

We would appreciate your comments and suggestions on this manual. We will use these comments to improve our manuals. When you send a comment or suggestion, please include the manual name and manual number. You can send your comments by any of the following methods:

- Send email to your local Hitachi representative.
- Send email to the following address:  
WWW-mk@itg.hitachi.co.jp
- If you do not have access to email, please fill out the following information and submit this form to your Hitachi representative:

<b>Manual name:</b>	
<b>Manual number:</b>	
<b>Your name:</b>	
<b>Company or organization:</b>	
<b>Street address:</b>	
<b>Comment:</b>	

<b>(For Hitachi use)</b>
--------------------------